


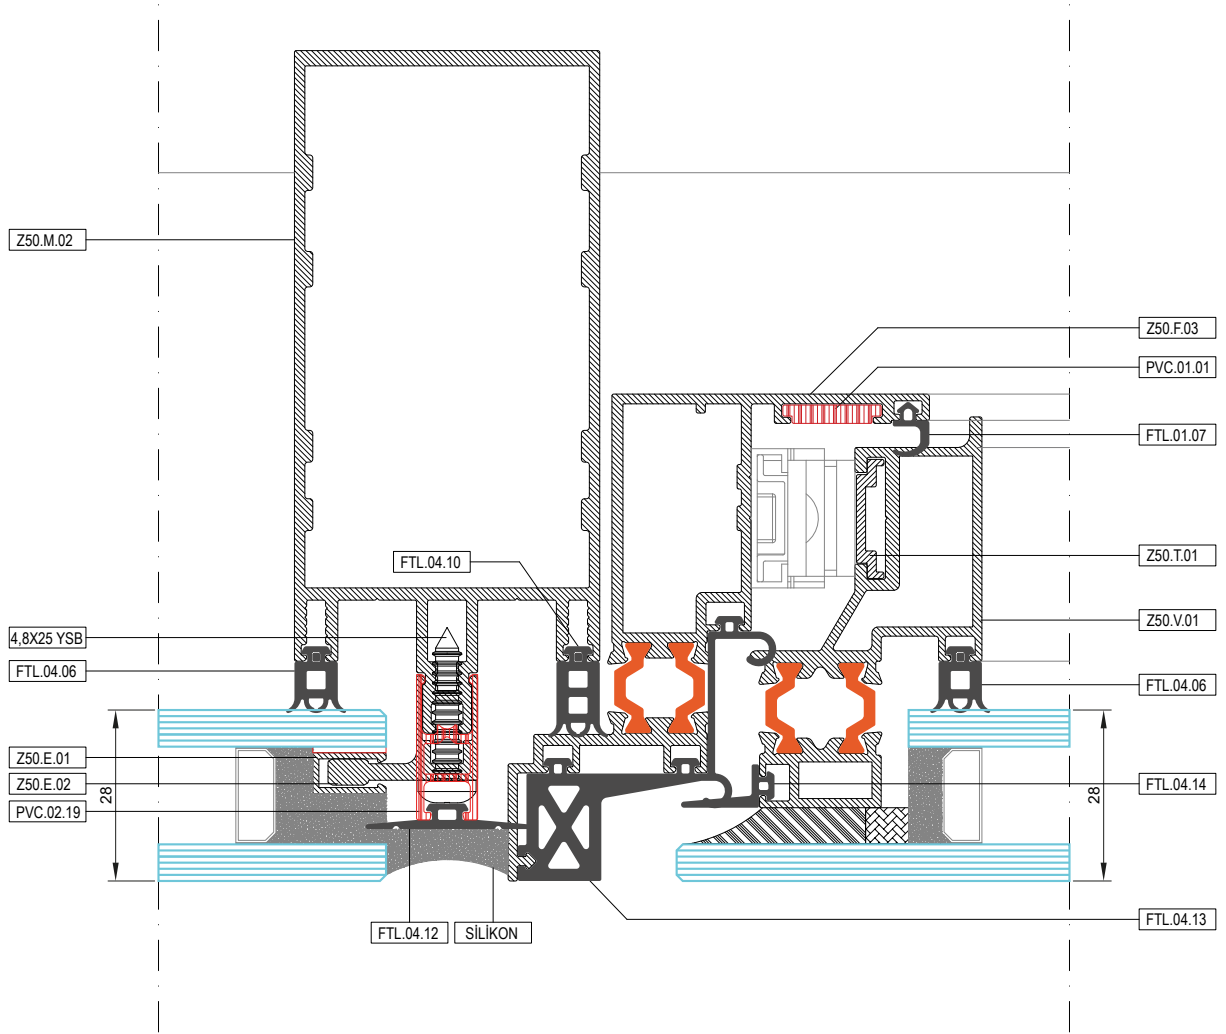

DÜŞEY PROFİL DERİNLİĞİ / MULLION PROFILES DEPTH

80 mm - 180 mm

DÜŞEY PROFİL JX JY / MULLION PROFILES JX JY

JX: 52 - 441 cm⁴ JY: 22 - 45 cm⁴

YATAY PROFİL DERİNLİĞİ / TRANSOM PROFILES DEPTH


55 mm - 185 mm

YATAY PROFİL JX JY / TRANSOM PROFILES JX JY

JX: 20 - 382 cm⁴ JY: 14 - 40 cm⁴

CAM KALINLIĞI / GLASS THICKNESS

24 mm - 33 mm

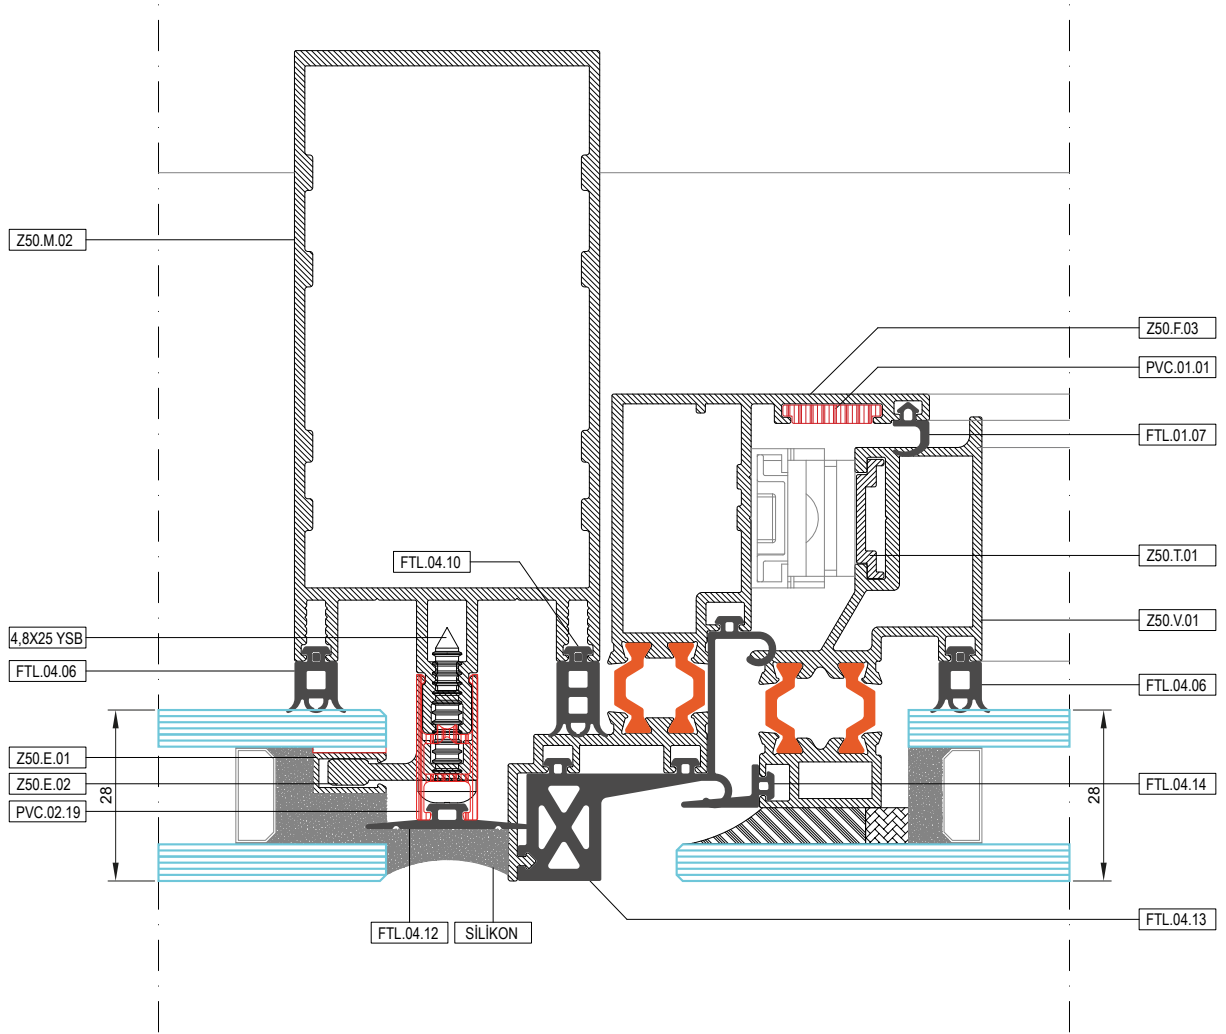

DÜŞEY PROFİL DERİNLİĞİ / MULLION PROFILES DEPTH

80 mm - 180 mm

DÜŞEY PROFİL JX JY / MULLION PROFILES JX JY

JX: 52 - 441 cm⁴ JY: 22 - 45 cm⁴

YATAY PROFİL DERİNLİĞİ / TRANSOM PROFILES DEPTH


55 mm - 185 mm

YATAY PROFİL JX JY / TRANSOM PROFILES JX JY


JX: 20 - 382 cm⁴ JY: 14 - 40 cm⁴

CAM KALINLIĞI / GLASS THICKNESS

24 mm - 33 mm

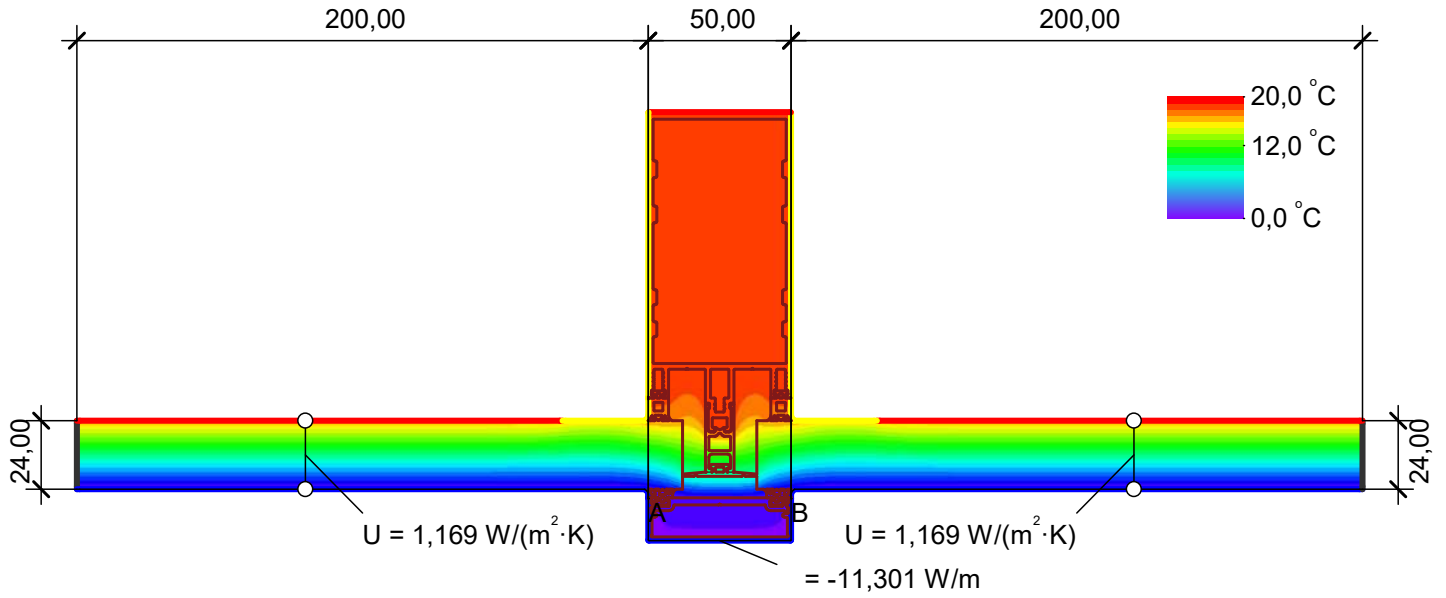


$$U_{f,A,B} = \frac{\frac{11,301}{20,0} - 1,169 \cdot 0,2 - 1,169 \cdot 0,2}{0,05} = 1,95 \text{ W}/(\text{m}^2 \cdot \text{K})$$




Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	[°C]	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, frame	0,000	0,040	
PVC-U (polyvinylchloride), rigid	0,170	Interior, frame, normal	20,000	0,130	
Panel	0,035	Interior, frame, reduced	20,000	0,200	
Unventilated air cavity *		Symmetry/Model section	0,000		

* EN ISO 10077-2:2017, 6.4.3/anisotrop

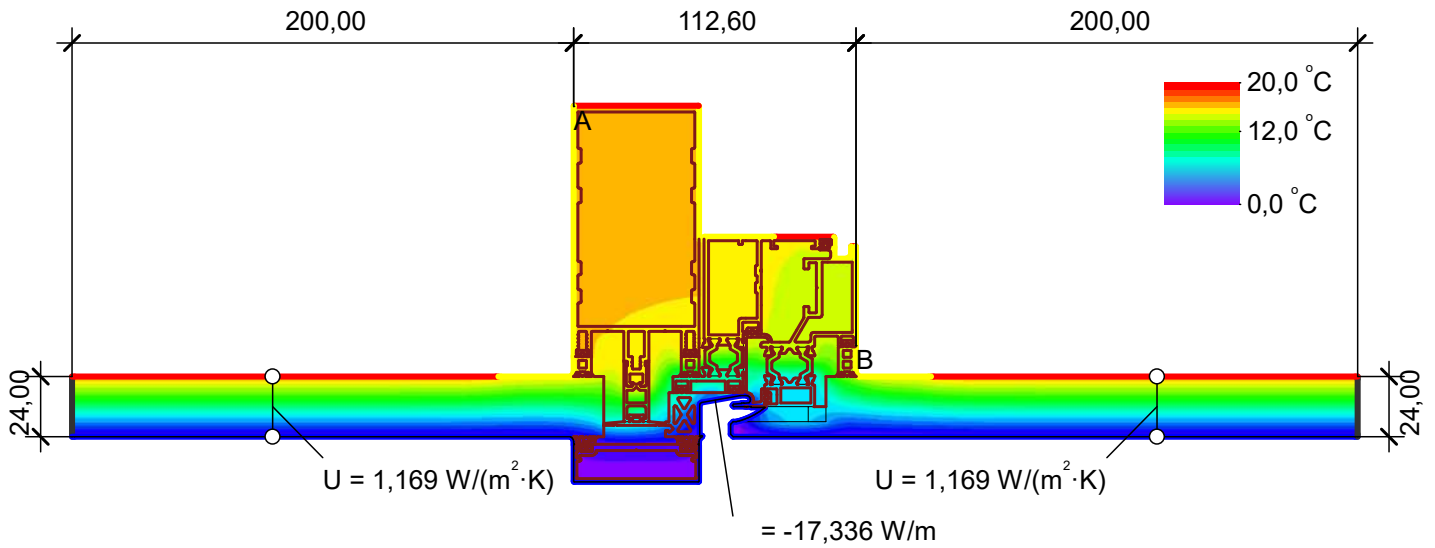


$$U_{f,A,B} = \frac{\frac{17,336}{20,0} - 1,169 \cdot 0,2 - 1,169 \cdot 0,2}{0,113} = 3,55 \text{ W}/(\text{m}^2 \cdot \text{K})$$




Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	[°C]	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	silon 0.9			0,900
Butyl rubber, solid/hot melt	0,240	erior, frame		0,000	0,040
EPDM (ethylene propylene diene monomer)	0,250	erior, frame, normal		20,000	0,130
PVC-U (polyvinylchloride), rigid	0,170	erior, frame, reduced		20,000	0,200
Panel	0,035	ometry/Model section	0,000		
Polyamid 6.6 with 25% glass fibre	0,300				
Silicone, filled	0,500				
Unventilated air cavity *					

* EN ISO 10077-2:2017, 6.4.3/anisotrop

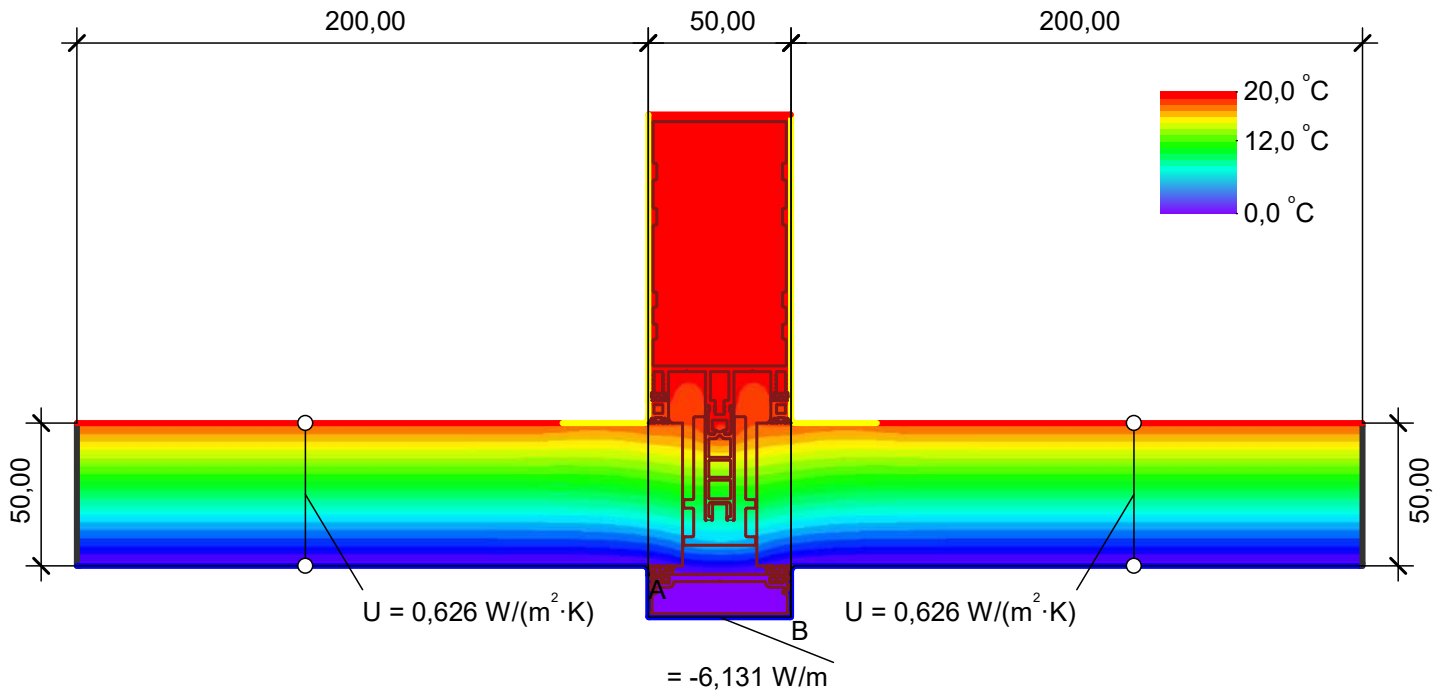


$$U_{f,A,B} = \frac{\frac{6,131}{20,0} - 0,626 \cdot 0,2 - 0,626 \cdot 0,2}{0,05} = 1,13 \text{ W}/(\text{m}^2 \cdot \text{K})$$




Material	[W/(m·K)]	Boundary Condition	q[W/m²]	[°C]	R[(m²·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, frame		0,000	0,040
EPDM KOPUK	0,120	Interior, frame, normal		20,000	0,130
PVC-U (polyvinylchloride), rigid	0,170	Interior, frame, reduced		20,000	0,200
Panel	0,035	Symmetry/Model section	0,000		
Unventilated air cavity *					

* EN ISO 10077-2:2017, 6.4.3/anisotrop


Z50.M.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,667	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	52,984	22,635	11,139	9,054

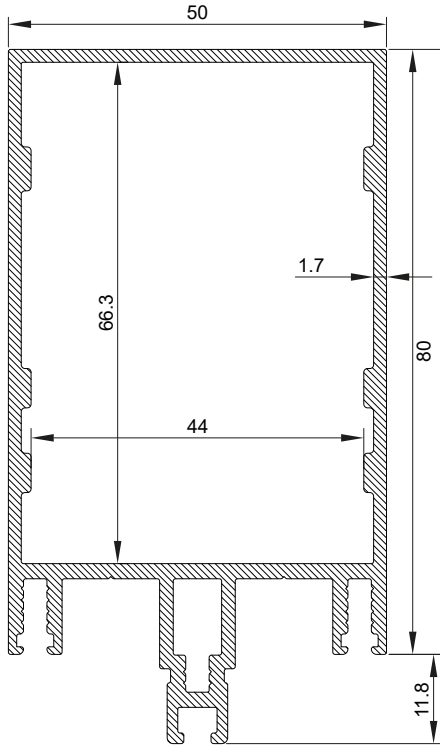


Z50.M.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,992	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	102,953	28,052	18,396	11,221

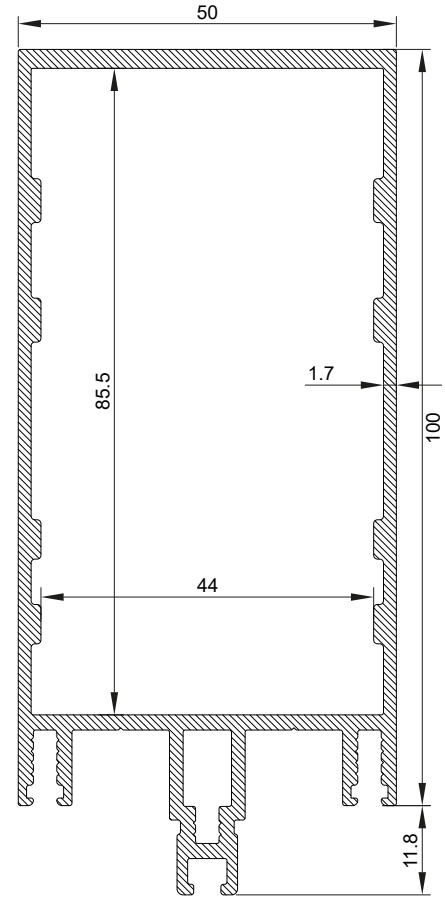


Z50.M.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,217	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	
	160,052	32,795	24,048	13,118

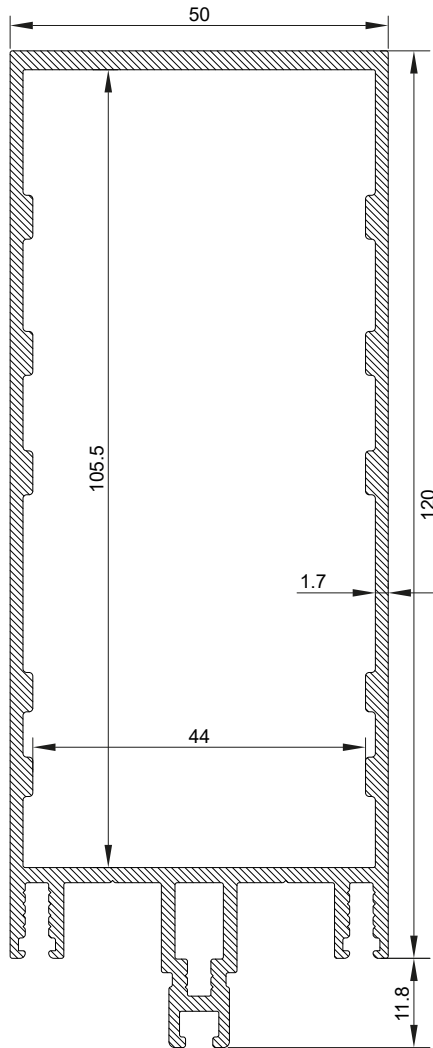


Z50.M.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,463	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	
	241,717	37,184	31,740	14,874

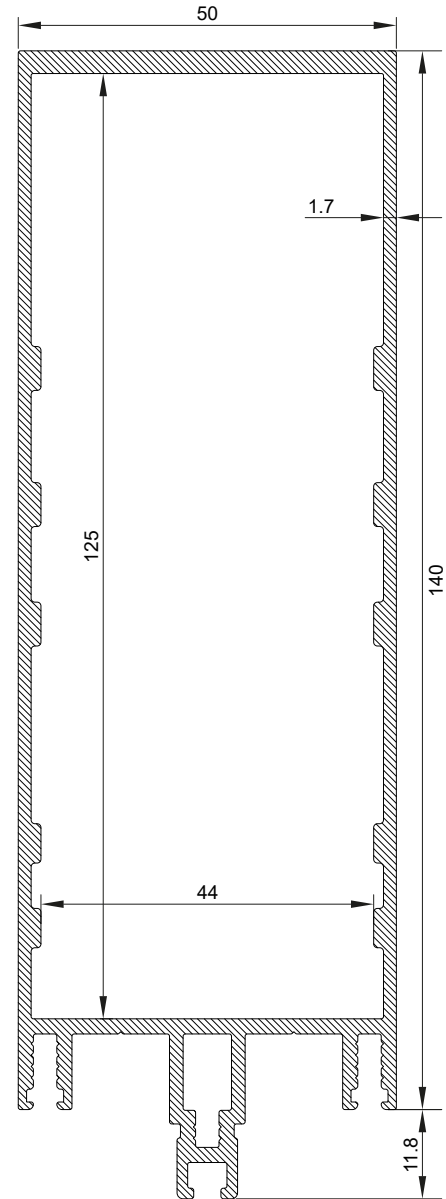


Z50.M.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,647	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ³)	Wy (cm ³)
	332,113	41,152	38,031	16,461

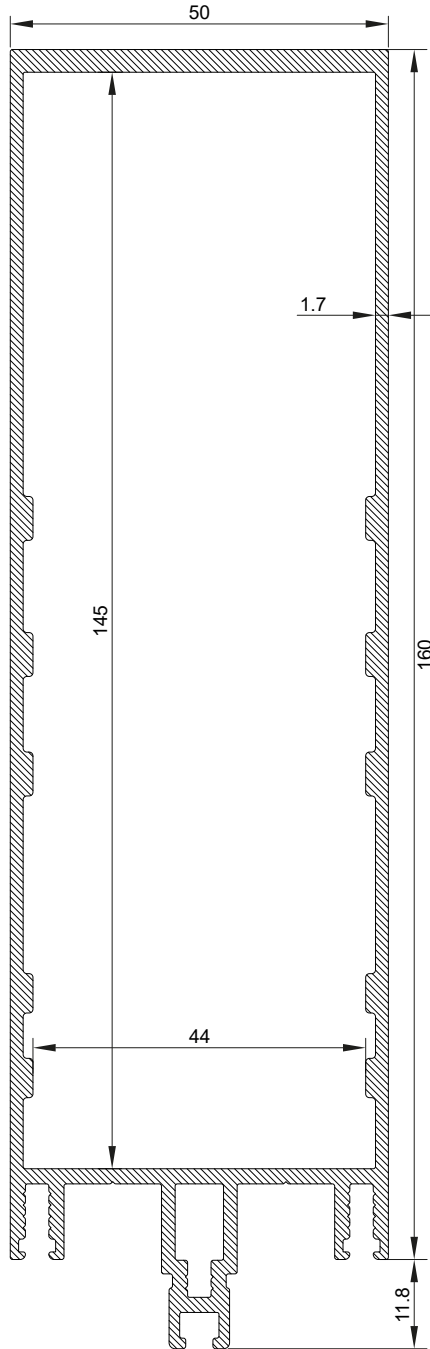


Z50.M.06	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,841	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ³)	Wy (cm ³)
	441,881	45,119	44,931	18,048

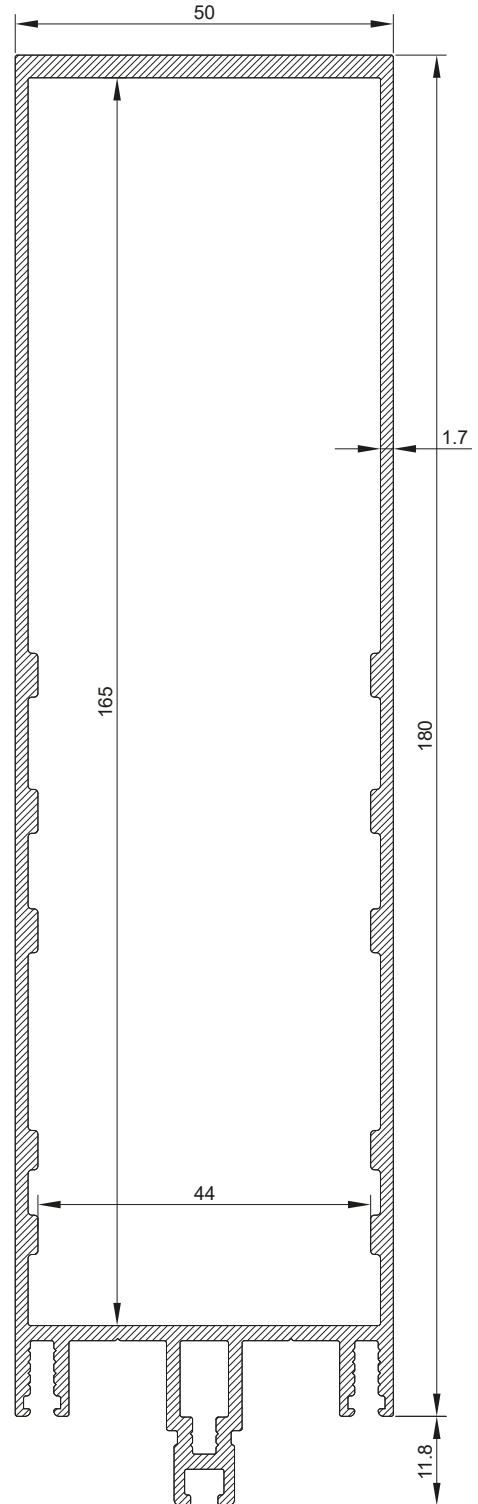


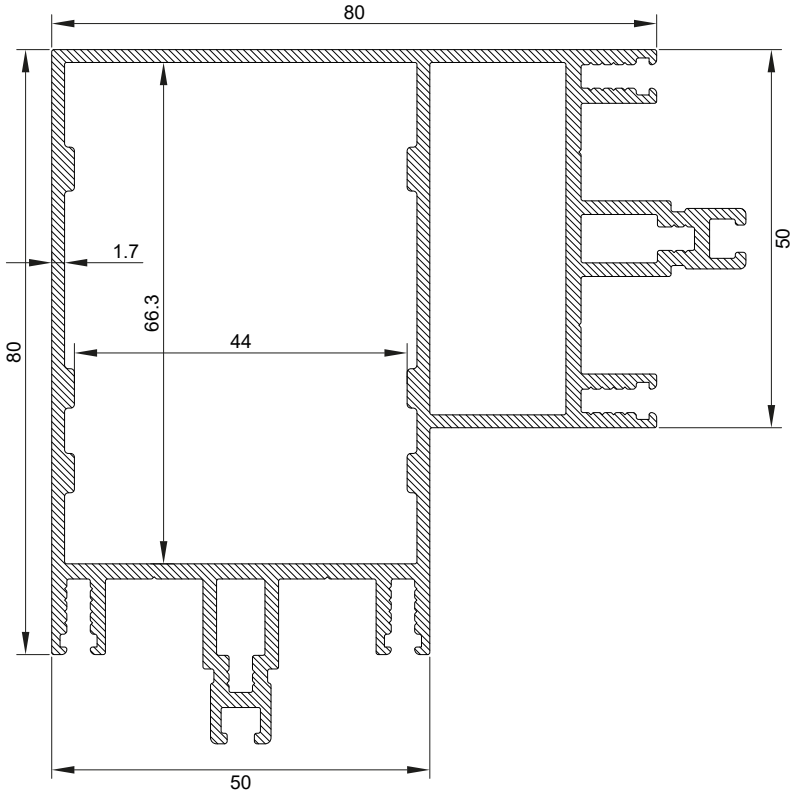


Z50.D.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,548	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	72,980	72,132	14,025	14,259

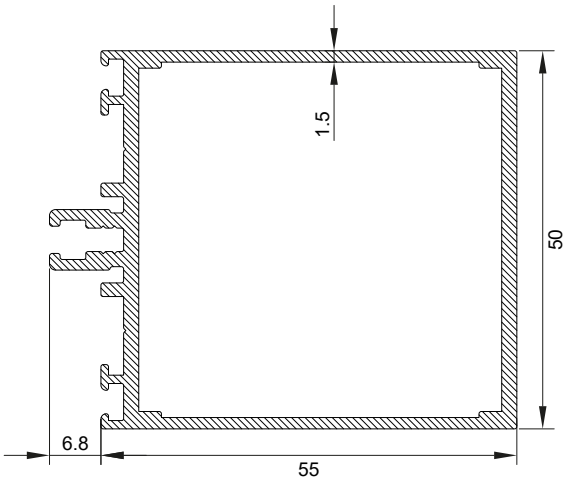


Z50.T.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,137	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	20,680	14,065	8,272	4,524

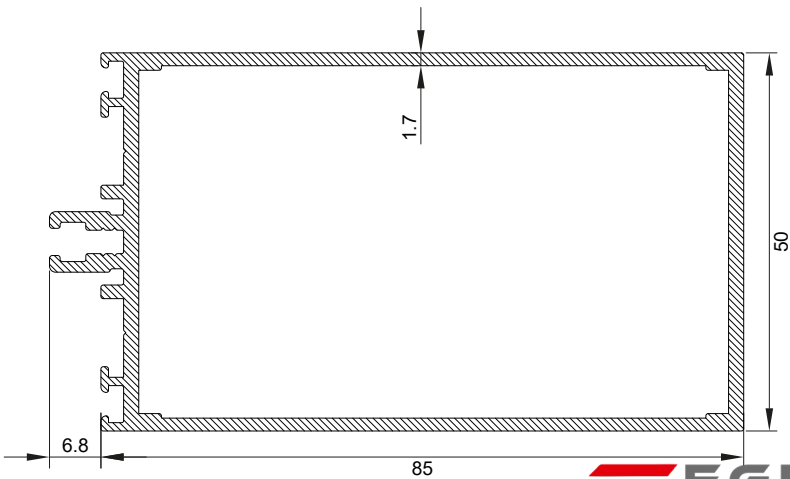


Z50.T.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,458	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	58,112	20,937	23,245	4,498

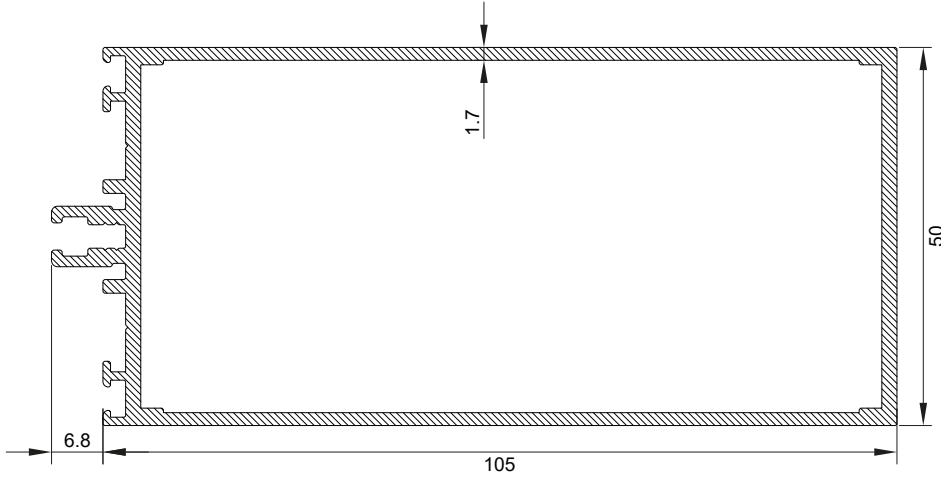


Z50.T.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,641	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	96,045	24,904	38,418	4,366

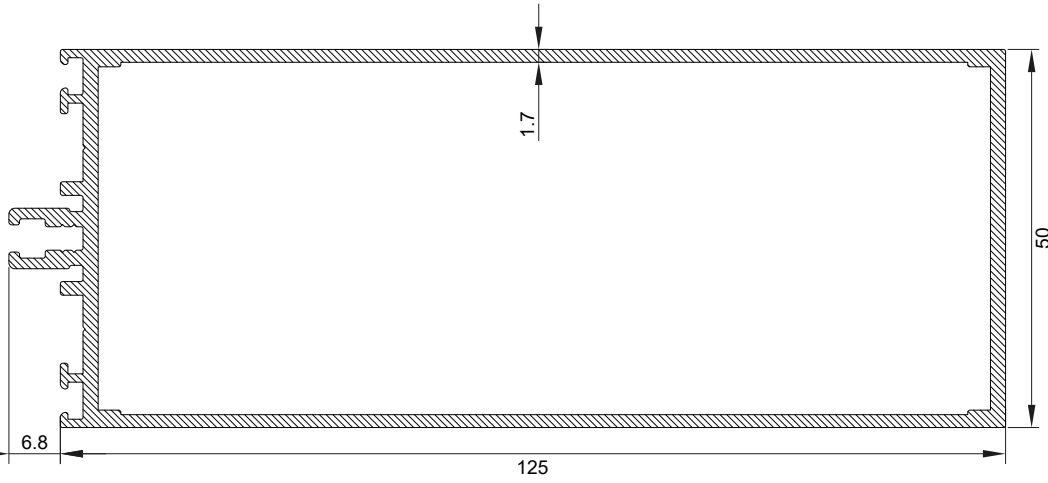


Z50.T.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,825	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	146,110	28,872	58,444	4,282

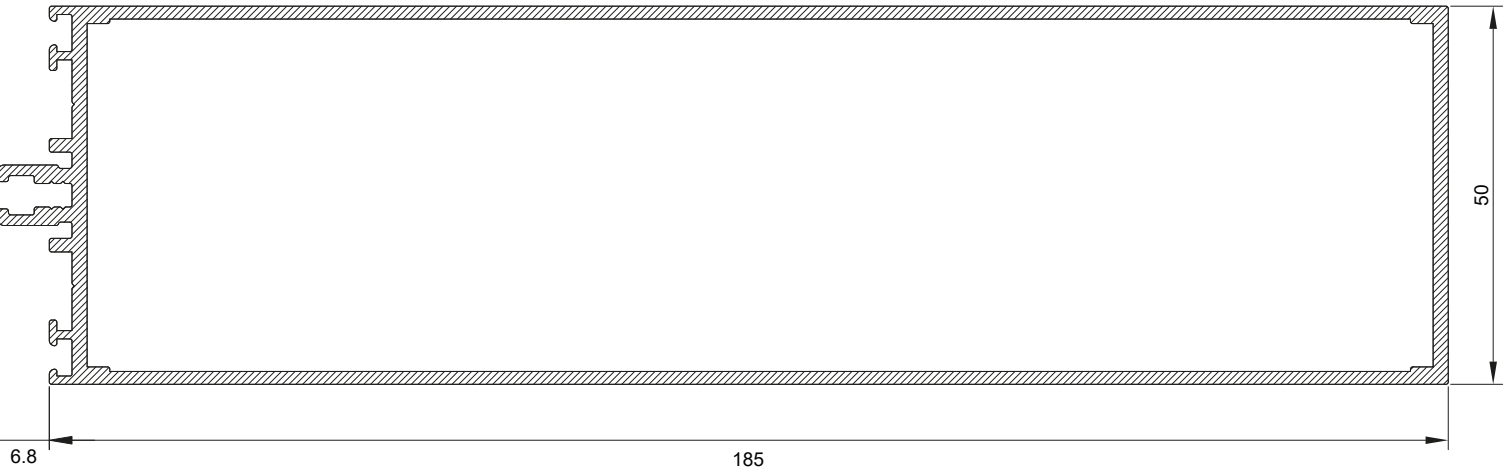


Z50.T.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,384	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	382,759	40,774	153,104	4,150




Z50.P.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,331	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	2,410	0,018	1,006	0,005

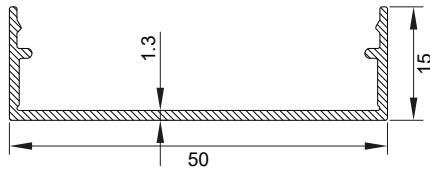

Z50.P.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,276	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	3,531	0,179	1,412	0,153




Z50.P.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,446	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	3,818	0,146	1,595	0,215

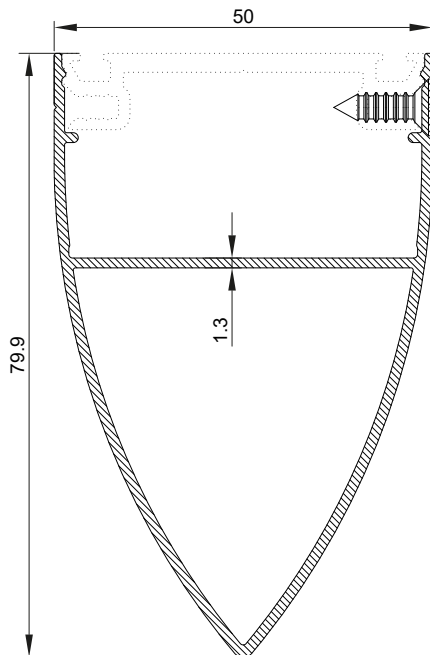


Z50.P.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,805	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	9,541	13,651	3,816	3,314



Z50.F.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,194	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	8,048	18,751	2,078	5,465

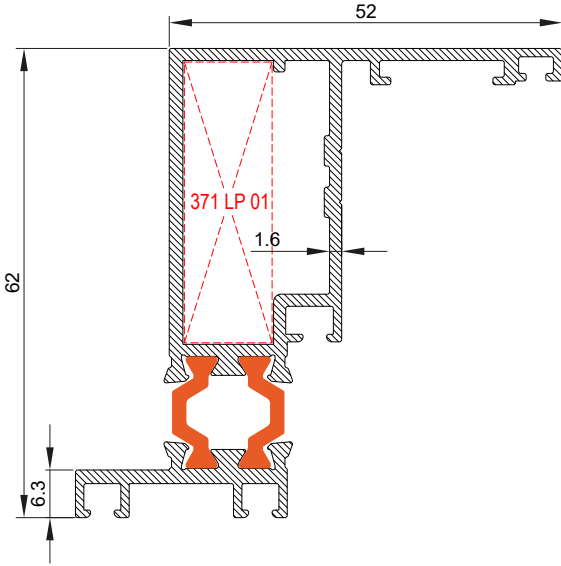


Z50.V.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,150	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	4,423	13,030	2,181	3,777

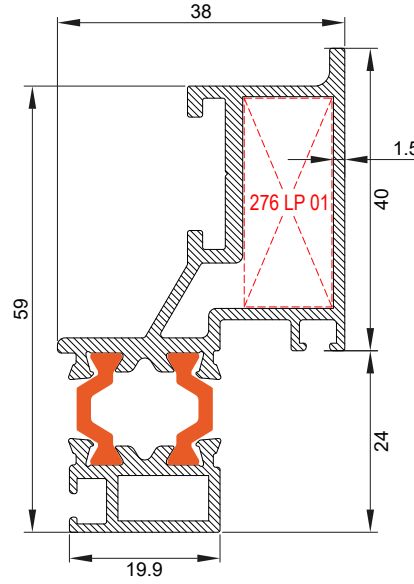

Z50.V.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,235	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	4,423	23,739	2,181	5,650

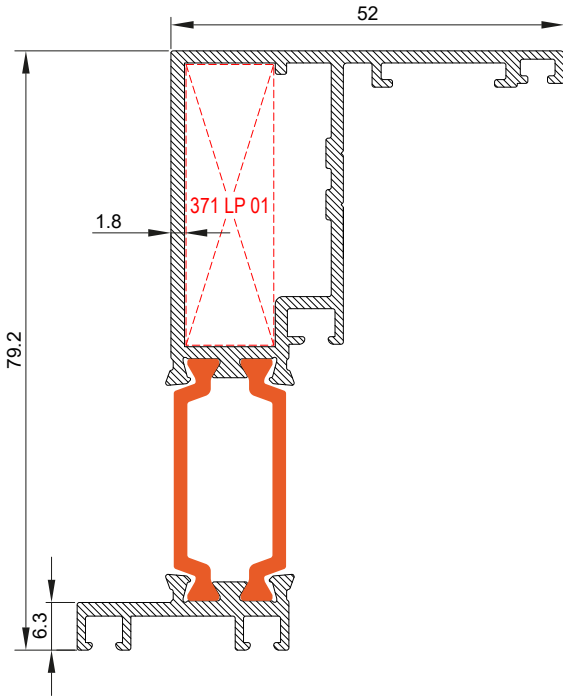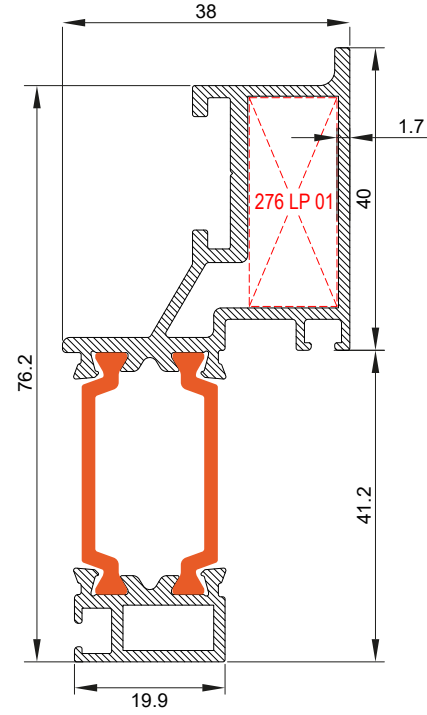


Z50.F.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,280	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	8,048	30,901	2,078	6,541

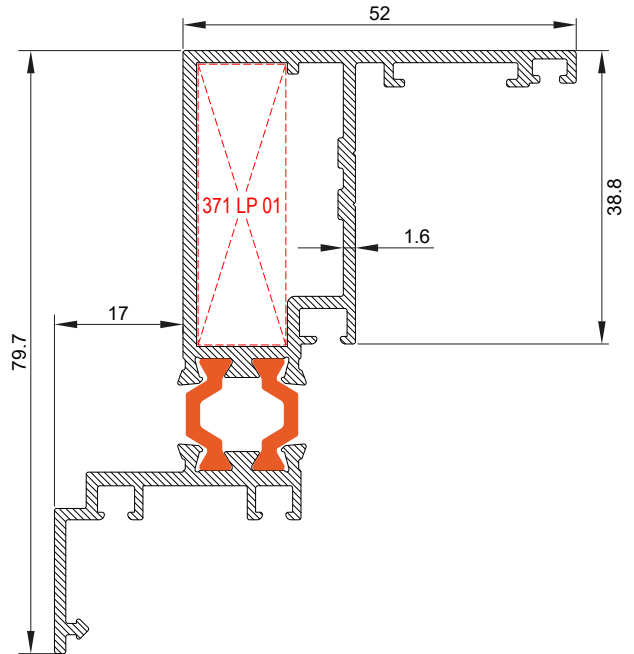


Z50.F.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,303	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	11,095	25,254	2,683	5,238


Z50.C.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	4,210	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	41,057	606,904	1,910	54,981

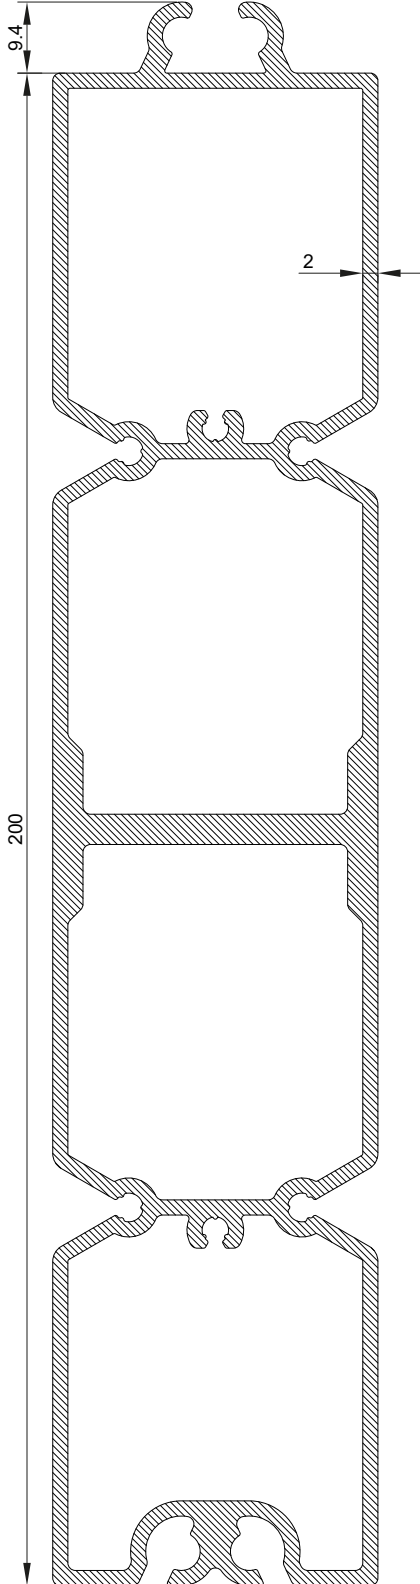


Z50.C.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,640	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,790	6,477	0,570	0,284

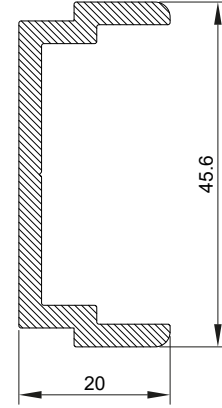


Z50.P.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,312	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	4,302	0,417	1,721	0,278

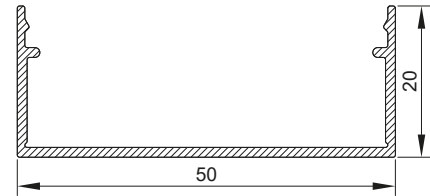




Z50.G.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,090	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,014	0,057	0,040	0,064




Z50.G.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,132	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,026	0,166	0,074	0,135




Z50.G.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,164	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,037	0,358	0,105	0,234


ORTA KAYIT BAĞLANTI PROFİLİ / T-JOINT PROFİL




Z50.S.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,295	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,830	0,035	0,460	0,049




Z50.S.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,400	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	3,992	0,030	1,368	0,043




Z50.S.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,270	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,754	0,074	0,394	0,084




Z50.E.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,080	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,045	0,021	0,067	0,063




Z50.E.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,309	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,650	0,211	0,469	0,158



Z50.E.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,281	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,373	0,608	0,377	0,482




Z50.J.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,134	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,118	0,202	0,150	0,137




Z77.T.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,104	6	EN AW 6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,144	0,005	0,136	0,016

A	B	C	D	E	F	G	H	I	J	K
CAM GLASS	İÇ CAM FİTİLİ GLASS GASKET	DIŞ CAM FİTİLİ GLASS GASKET	ORTA FİTİL CENTRAL GASKET	PVC PROFİL PVC PROFILE	İÇ CAM FİTİLİ GLASS GASKET	İÇ CAM FİTİLİ GLASS GASKET	İÇ BİNİ FİTİLİ ACUS. GASKET	KASA FİTİLİ FRAME GASKET	VİDA SCREW	CAM ÇİTA PR. GLAZING BEAD
24 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.06	FTL.04.10	FTL.01.07	FTL.04.13	4,2X45 YSB	————
25 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.07	FTL.04.09	FTL.01.07	FTL.04.13	4,2X45 YSB	————
26 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.08	FTL.04.08	FTL.01.07	FTL.04.13	4,2X45 YSB	————
27 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.09	FTL.04.07	FTL.01.07	FTL.04.13	4,2X45 YSB	————
28 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.10	FTL.04.06	FTL.01.07	FTL.04.13	4,2X45 YSB	————
29 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.05	FTL.04.05	FTL.01.07	FTL.04.13	4,2X50 YSB	Z50.G.01
30 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.19	FTL.04.06	FTL.04.04	FTL.01.07	FTL.04.13	4,2X50 YSB	Z50.G.01
31 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.20	FTL.04.07	FTL.04.03	FTL.01.07	FTL.04.13	4,2X50 YSB	Z50.G.01
32 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.20	FTL.04.08	FTL.04.02	FTL.01.07	FTL.04.13	4,2X50 YSB	Z50.G.01
33 mm	FTL.04.06	FTL.04.11	FTL.04.12	PVC.02.20	FTL.04.09	FTL.04.01	FTL.01.07	FTL.04.13	4,2X50 YSB	Z50.G.01

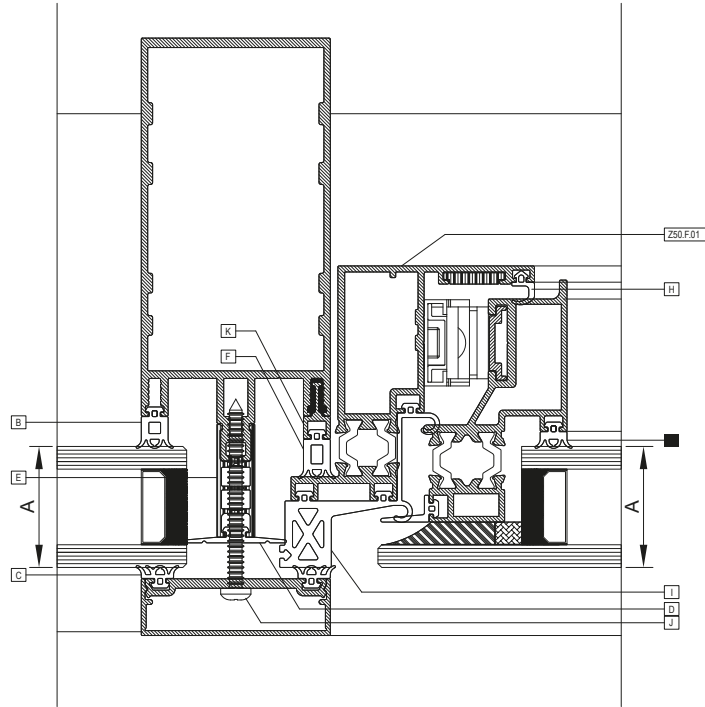

FTL.04.01




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)

Malzeme / Material :
EPDM

Ağırlık / Weight :
32 gr/m

Paket / Package:
468 m / 15 kg

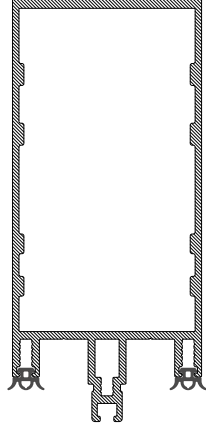

FTL.04.05




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)


Malzeme / Material :
EPDM

Ağırlık / Weight :
61 gr/m

Paket / Package:
245 m / 15 kg

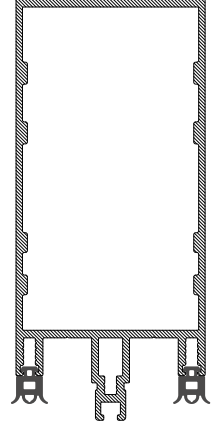

FTL.04.02




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)

Malzeme / Material :
EPDM

Ağırlık / Weight :
41 gr/m

Paket / Package:
365 m / 15 kg

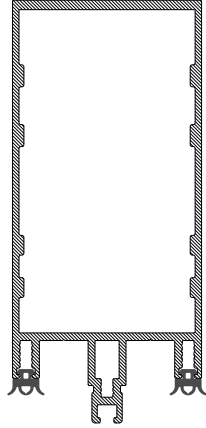

FTL.04.06




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)


Malzeme / Material :
EPDM

Ağırlık / Weight :
66 gr/m

Paket / Package:
228 m / 15 kg

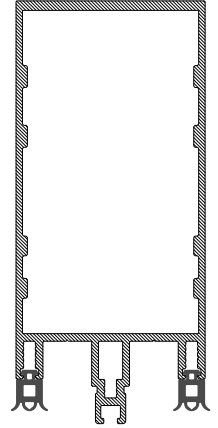

FTL.04.03




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)

Malzeme / Material :
EPDM

Ağırlık / Weight :
50 gr/m

Paket / Package:
300 m / 15 kg

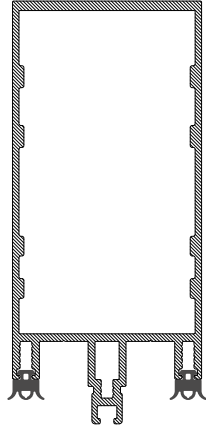

FTL.04.07




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)


Malzeme / Material :
EPDM

Ağırlık / Weight :
71 gr/m

Paket / Package:
211 m / 15 kg

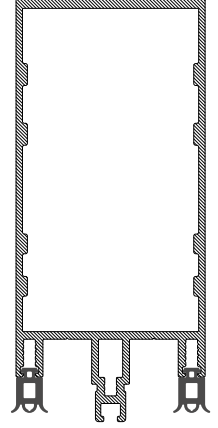

FTL.04.04




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)


Malzeme / Material :
EPDM

Ağırlık / Weight :
55 gr/m

Paket / Package:
272 m / 15 kg

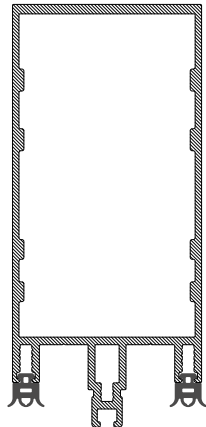

FTL.04.08




İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)



Malzeme / Material :
EPDM

Ağırlık / Weight :
76 gr/m


Paket / Package:
197 m / 15 kg

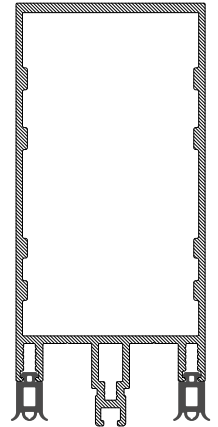



FTL.04.09

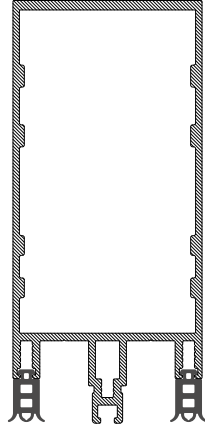İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
87 gr/m**Paket / Package:**
172 m / 15 kg


FTL.04.14

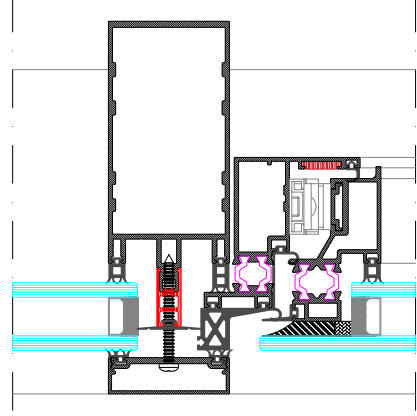BİNİ FİTİLİ
ACUSTICAL GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
378 gr/m**Paket / Package:**
40 m / 15 kg


FTL.04.10

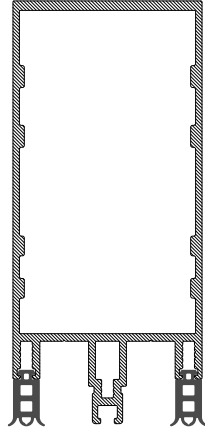İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
93 gr/m**Paket / Package:**
161 m / 15 kg


FTL.01.07

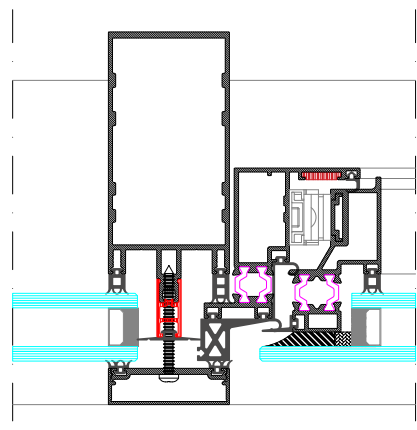BİNİ FİTİLİ
ACUSTICAL GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
28 gr/m**Paket / Package:**
536 m / 15 kg


FTL.04.11

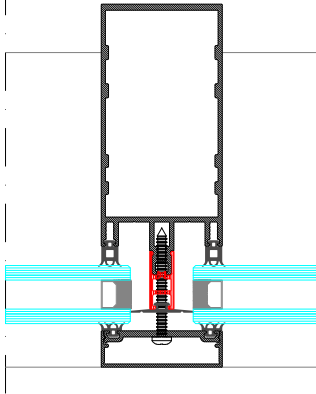DI; CAM FİTİLİ
GLAZING GASKET (OUTSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
36 gr/m**Paket / Package:**
417 m / 15 kg

FTL.04.12

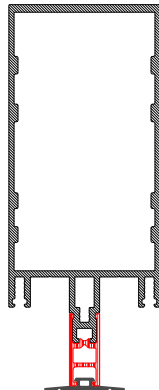DERZ FİTİLİ
JOINT GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
57 gr/m**Paket / Package:**
263 m / 15 kg

PVC.04.13




BİNİ FİTİLİ
ACUSTICAL GASKET


Malzeme / Material :
EPDM

Ağırlık / Weight :
414 gr/m

Paket / Package:
36 m / 15 kg

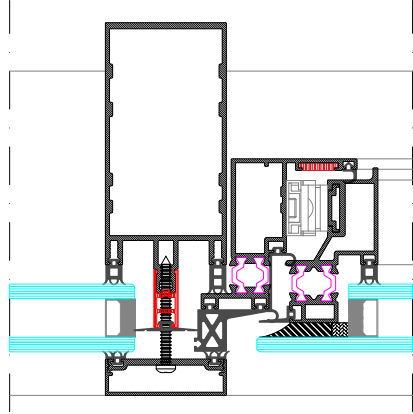

PVC.0415

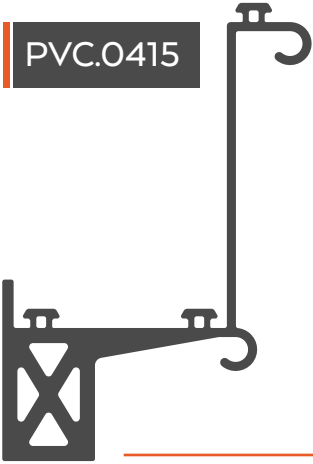


İÇ BİNİ FİTİLİ
INTERNAL REBATE GASKET


Malzeme / Material :
EPDM

Ağırlık / Weight :
28 gr/m


Paket / Package:
536 m / 15 kg

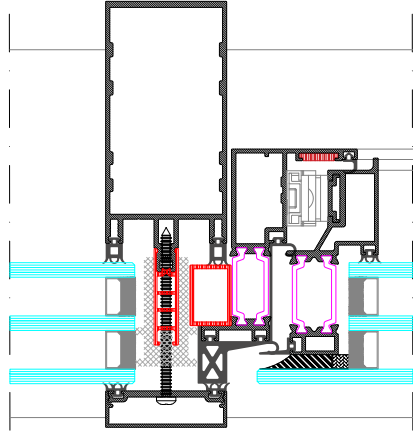


PVC.02.03



İZOLASYON FİTİLİ
INSULATION GASKET

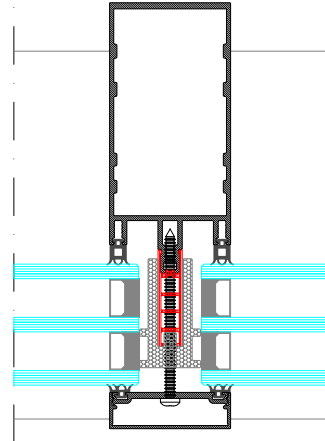


PVC.02.18




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

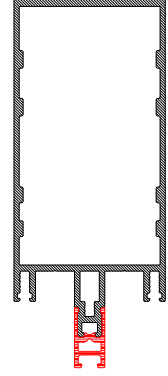


PVC.02.19




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

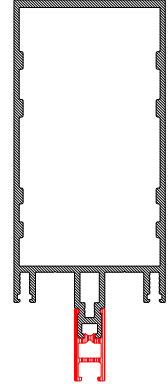


PVC.02.20




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

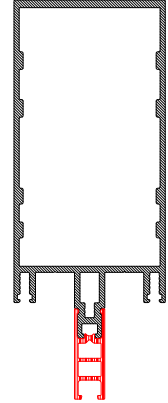


PVC.02.21




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

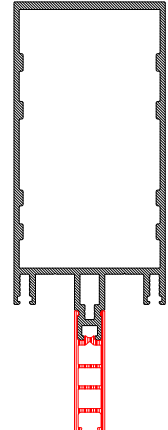


PVC.02.22




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

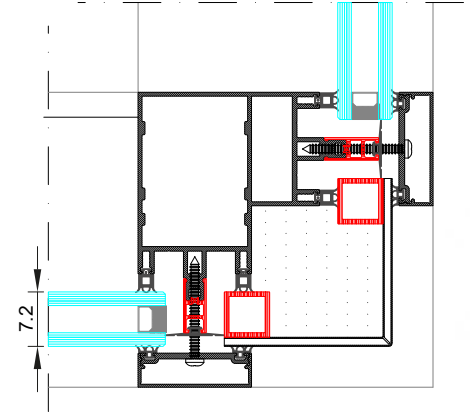


PVC.02.23




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

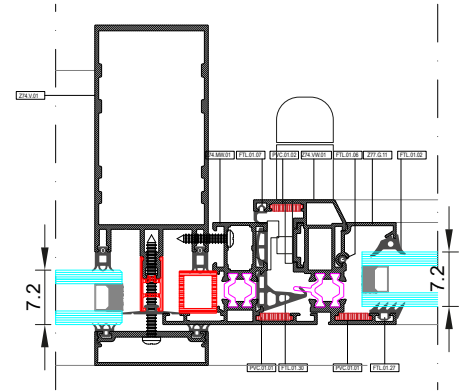


PVC.02.24




PVC PROFİLİ
PVC PROFILE

Malzeme / Material : PVC
Boy / Length : 6m

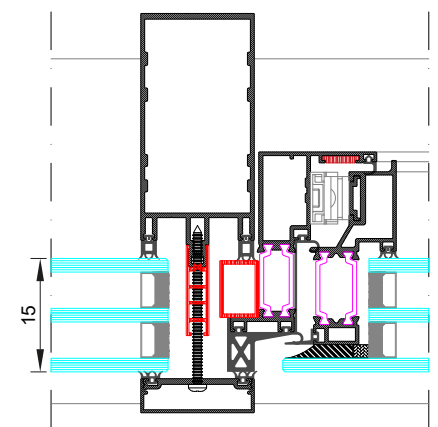


PVC.01.01




KÖŞE ÇAVUŞU
CORNER JOINT

Malzeme / Material : PVC

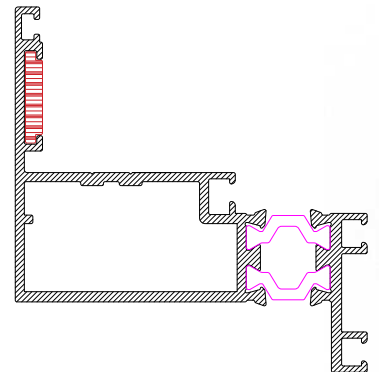


PVC.01.16

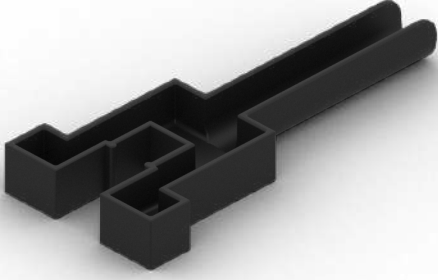


DİRENAJ PARÇASI (ÇÖRTEN)
DRAINAGE PART

Malzeme / Material : PVC

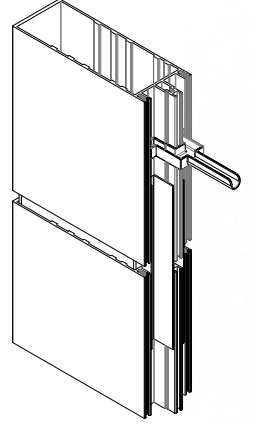


PLT-001

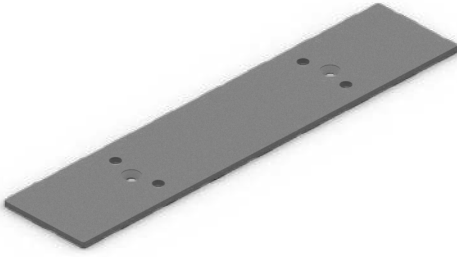

DİLASYON KAPAĞI
MULLION CONNECTION PART CAP

Malzeme / Material : ALUMİNYUM

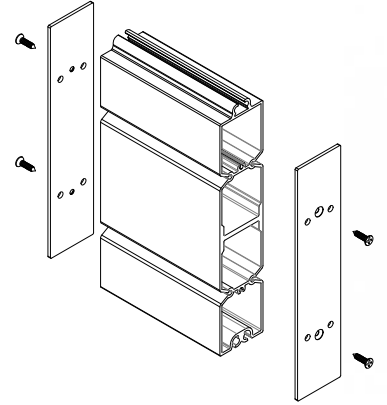


ENJ.01.03




YAKA CONTASI (50mm)
FLANGE GASKET (50mm)

Malzeme / Material : TPV

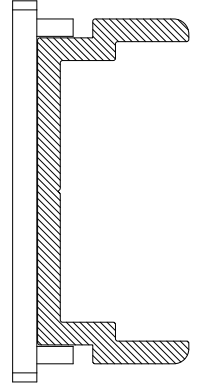


ENJ.01.04




YAKA CONTASI (80 mm)
FLANGE GASKES (80 mm)

Malzeme / Material : TPV

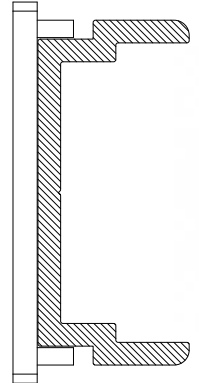


ENJ.01.05

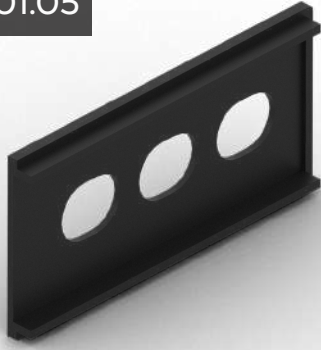


YAKA CONTASI (100 mm)
FLANGE GASKET (100 mm)

Malzeme / Material : TPV

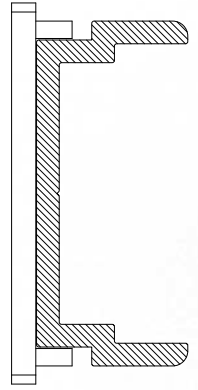


ENJ.01.06



YAKA CONTASI (120 mm)
FLANGE GASKET (120 mm)

Malzeme / Material : TPV

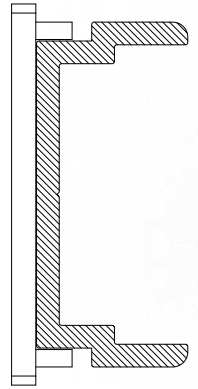


O47 C 01




"U" BAĞLANTI (57 mm)
"U" CONNECTION (57 mm)

Malzeme / Material : ALUMİNYUM




O77 C 01




"U" BAĞLANTI (77 mm)
"U" CONNECTION (77 mm)

Malzeme / Material : ALUMİNYUM

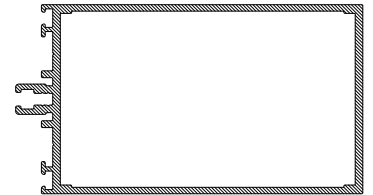


097 C 01




"U" BAĞLANTI (97 mm)
"U" CONNECTION (97 mm)

Malzeme / Material : ALUMİNYUM

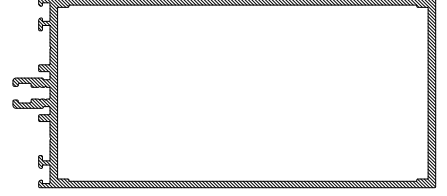


117 C 01

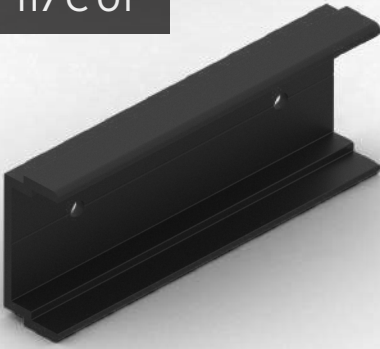

"U" BAĞLANTI (117 mm)
"U" CONNECTION (117 mm)

Malzeme / Material : ALUMİNYUM

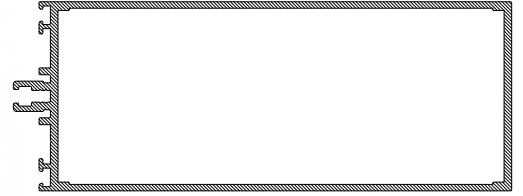


GBK.02.01



KİLİT MEKANİZMASI
GEARBOX

Malzeme / Material : PASLANMAZ ÇELİK / Stainless Steel

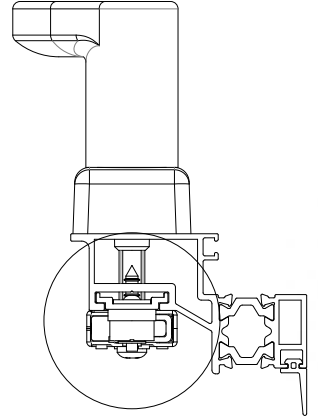


HN-016




BÜKÜMLÜ KOL (SAĞ EL)
TWISTED HANDLE


Malzeme / Material : ZAMAK

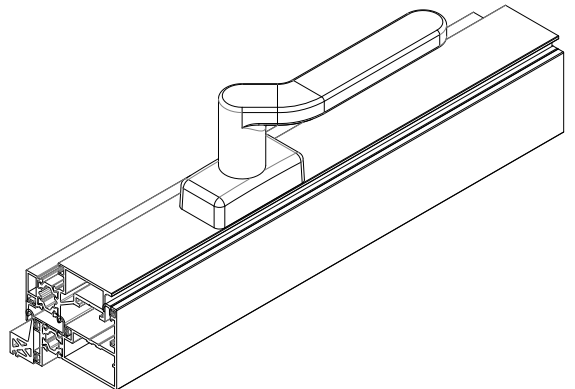


HN-021

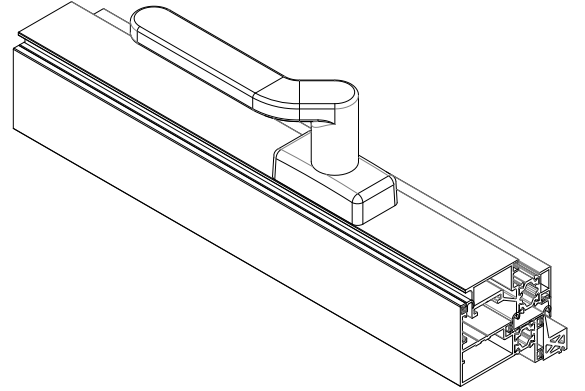**BÜKÜMLÜ KOL (SOL EL)**
TWISTED HANDLE**Malzeme / Material : ZAMAK**

KRS-002

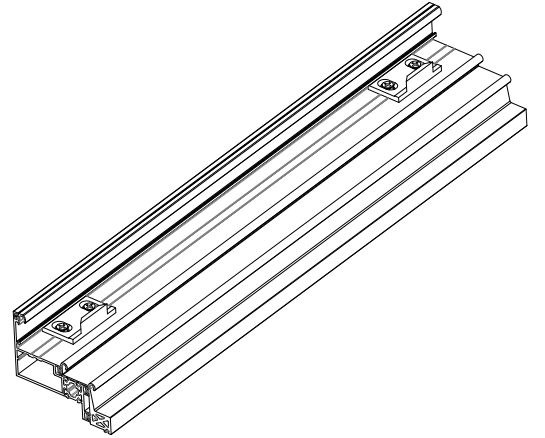**CEPHE PİM KARŞILIĞI**
FOREND FOR FACADE**Malzeme / Material : ZAMAK**

PİM-001

**PİM**
PIN**Malzeme / Material : ÇELİK / Steel**