





E-55

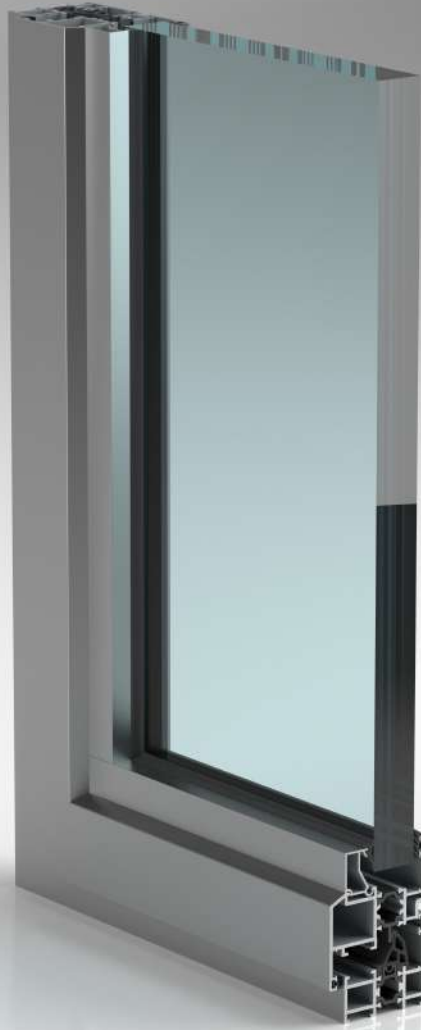

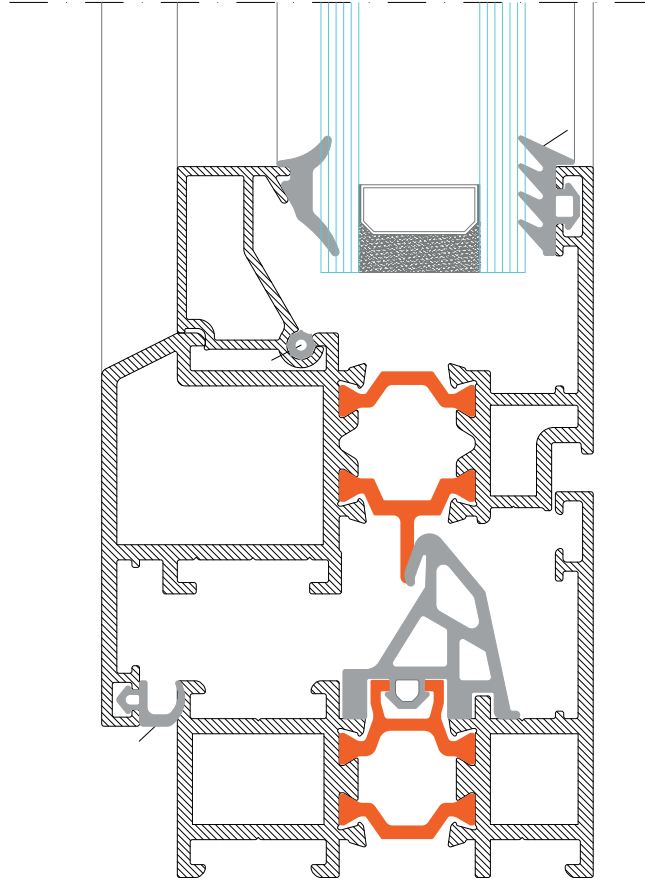

KASA DERİNLİĞİ / FRAME DEPTH

55 mm

KANAT DERİNLİĞİ / VENT DEPTH

65 mm

PROFİL ET KALINLIĞI / PROFILE WALL THICKNESS

2 mm

CAM KALINLIĞI / GLASS THICKNESS


4mm - 35 mm

POLİAMİD BARIYER UZUNLUĞU / POLYAMIDE STRIP LENGHT


18 mm

ISI YALITIM DEĞERİ (Uf) / THERMAL INSULATION VALUE (Uf)

-3,07W/m².K

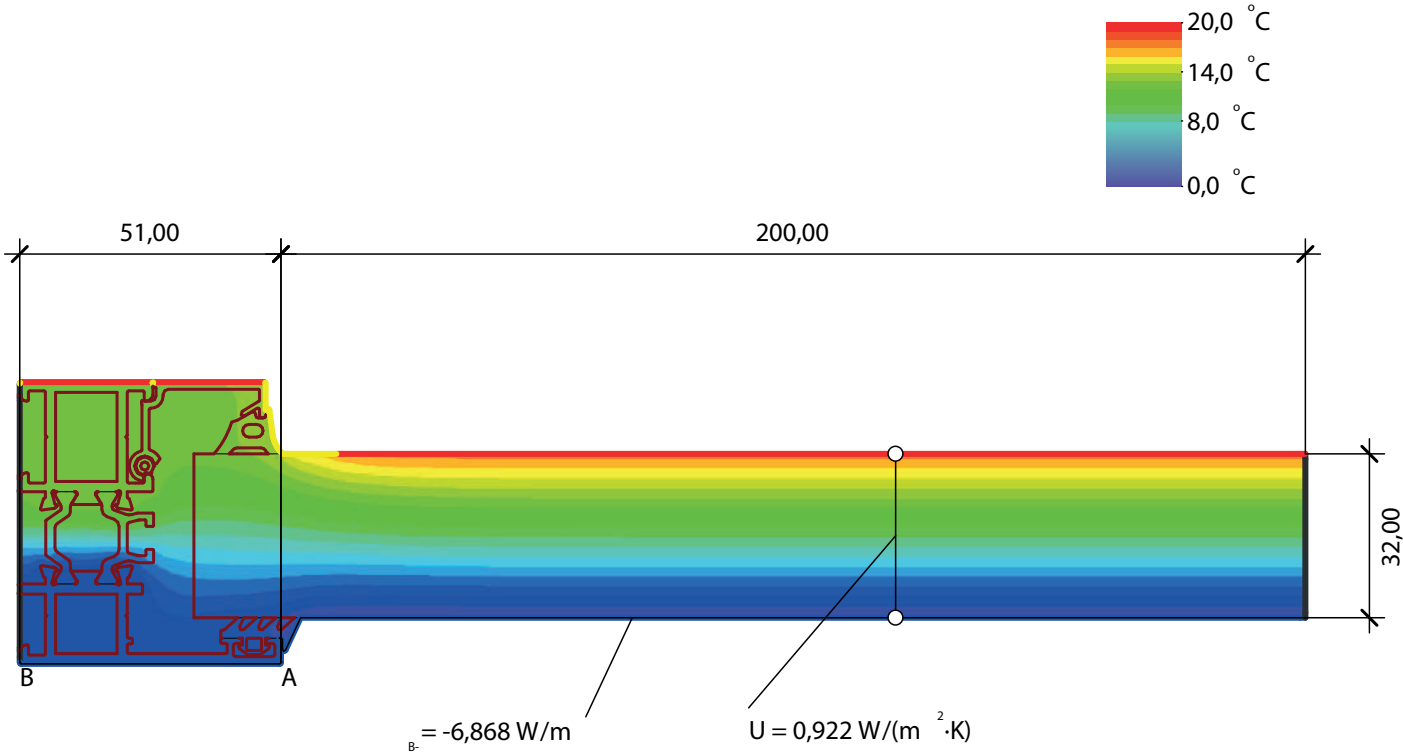


$$U_{fAB} = \frac{\frac{6,868}{20,0} - 0,922 \cdot 0,2}{0,051} = 3,12 \text{ W/(m}^2 \cdot \text{K)}$$




Material	[W/(m·K)]	Boundary Condition	q[W/m²]	[°C]	R[(m²·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)		0,000	0,040
Panel	0,035	Interior, frame, normal		20,000	0,130
Polyamid 6.6 with 25% glass fibre	0,300	Interior, frame, reduced		20,000	0,200
Unventilated air cavity *		Symmetry/Model section	0,000		

* EN ISO 10077-2:2017, 6.4.3/anisotrop

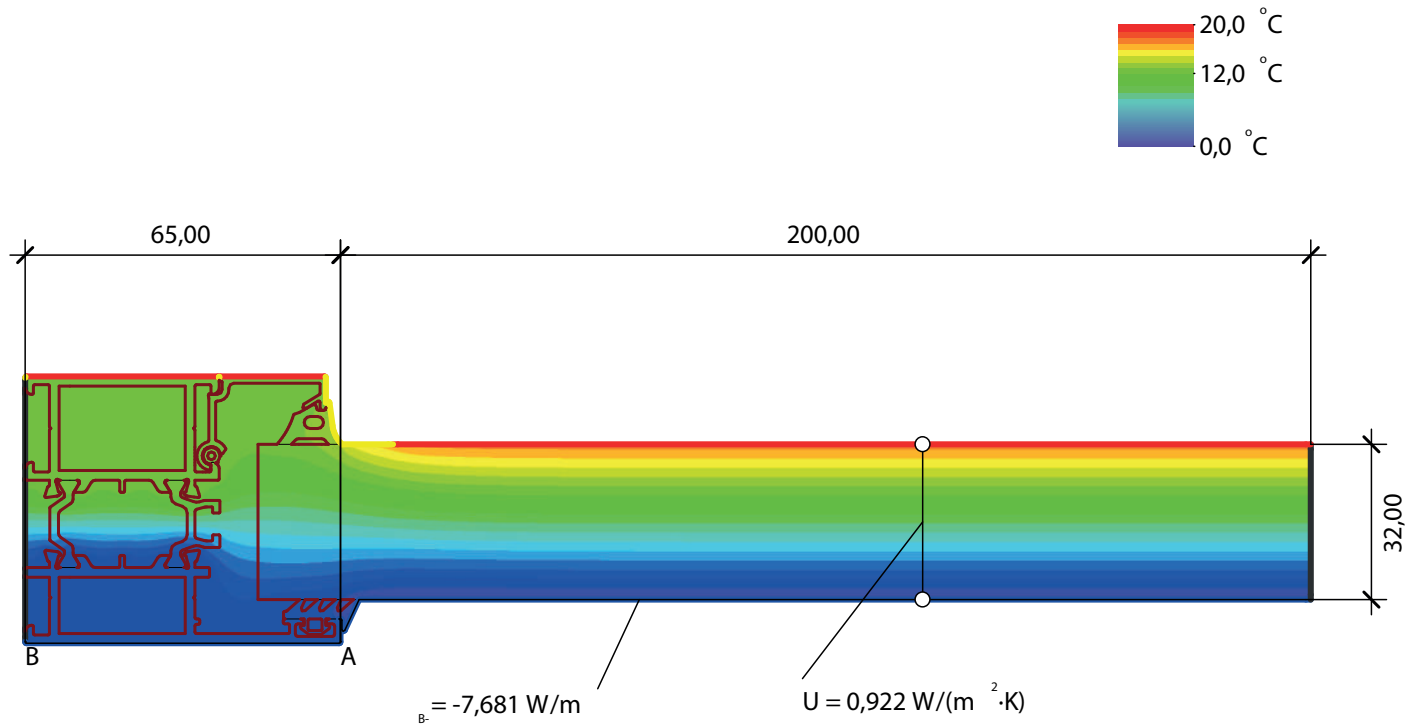


$$U_{f,A,B} = \frac{\frac{7,681}{20,0} - 0,922 \cdot 0,2}{0,065} = 3,07 \text{ W/(m}^2 \cdot \text{K)}$$




Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	[°C]	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	εpsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000	0,040	
Panel	0,035	Interior, frame, normal	20,000	0,130	
Polyamid 6.6 with 25% glass fibre	0,300	Interior, frame, reduced	20,000	0,200	
Unventilated air cavity *		Symmetry/Model section	0,000		

* EN ISO 10077-2:2017, 6.4.3/anisotrop

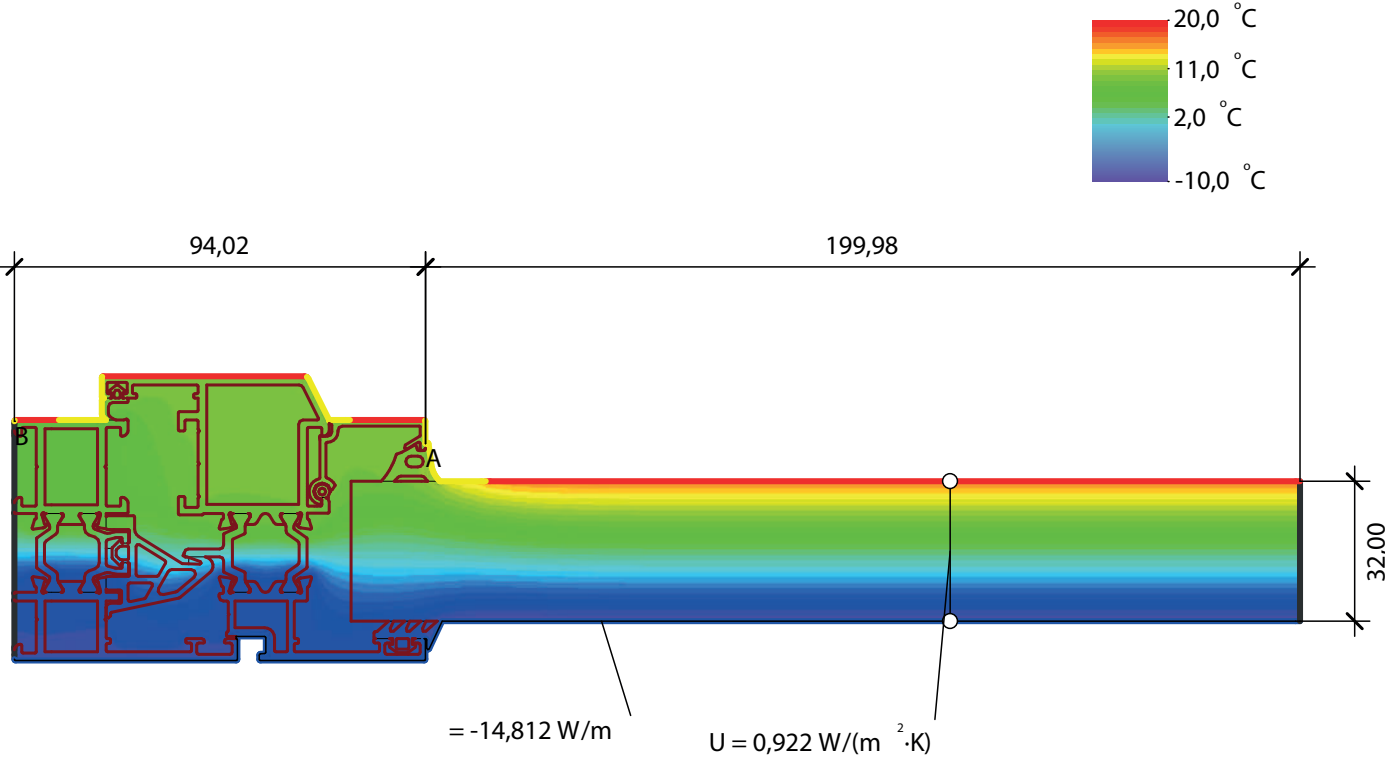


$$U_{fA,B} = \frac{\frac{14,812}{30,0} - 0,922 \cdot 0,2}{0,094} = 3,29 \text{ W/(m}^2 \cdot \text{K)}$$




Material	[W/(m·K)]	Boundary Condition	q[W/m²]	°C	R[(m²·K)/W]
Aluminium (Si Alloys)	160,000	silon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	terior, normal		-10,000	0,040
Panel	0,035	terior, frame, normal		20,000	0,130
Polyamid 6.6 with 25% glass fibre	0,300	terior, frame, reduced		20,000	0,200
Slightly ventilated air cavity *		mmetry/Model section	0,000		
Unventilated air cavity *					

* EN ISO 10077-2:2017, 6.4.3/anisotrop

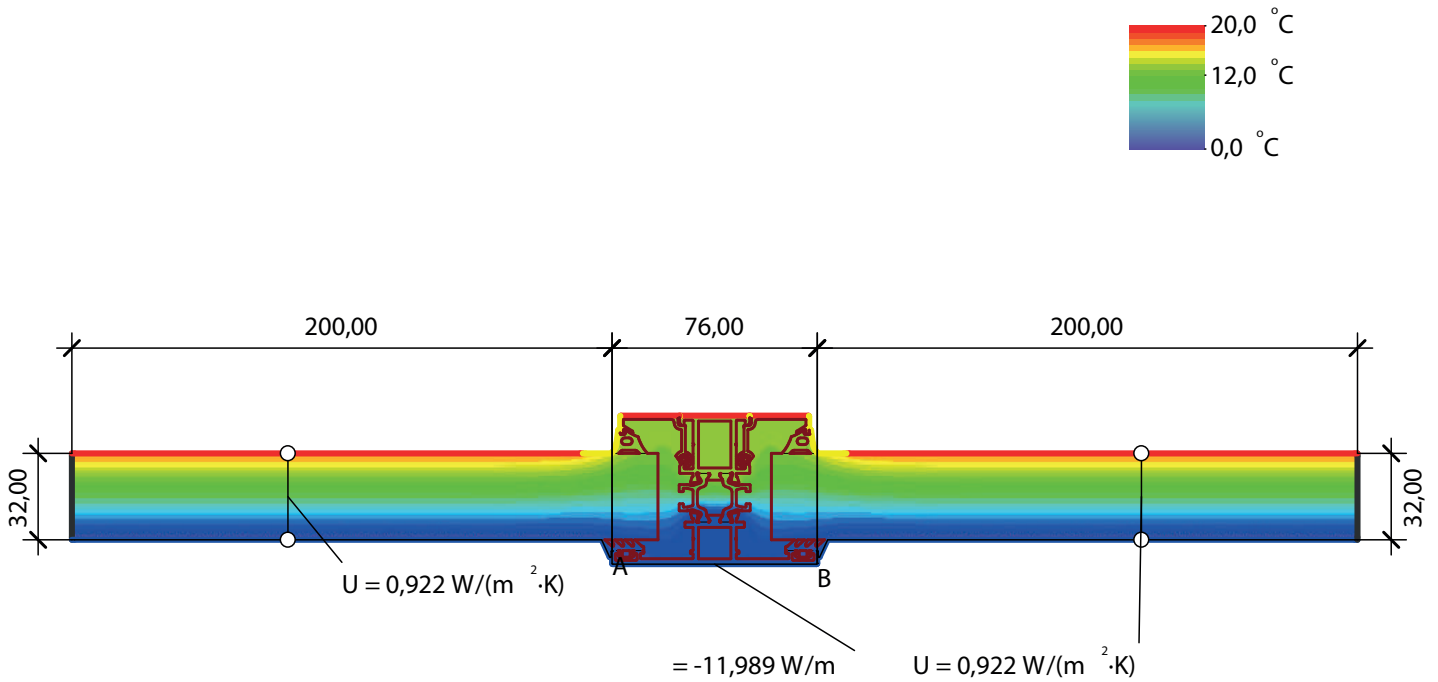

$$U_{fAB} = \frac{\frac{11,989}{20,0} - 0,922 \cdot 0,2 - 0,922 \cdot 0,2}{0,076} = 3,03 \text{ W/(m}^2 \cdot \text{K)}$$



Material

[W/(m·K)]

Boundary Condition

q[W/m²]


[°C]

R[(m²·K)/W]


Aluminium (Si Alloys)	160,000
EPDM (ethylene propylene diene monomer)	0,250
Panel	0,035
Polyamid 6.6 with 25% glass fibre	0,300
Unventilated air cavity*	

* EN ISO 10077-2:2017, 6.4.3/anisotrop


Epsilon 0.9			0,900
Exterior, normal (1)	0,000		0,040
Interior, frame, normal	20,000		0,130
Interior, frame, reduced	20,000		0,200
Symmetry/Model section	0,000		

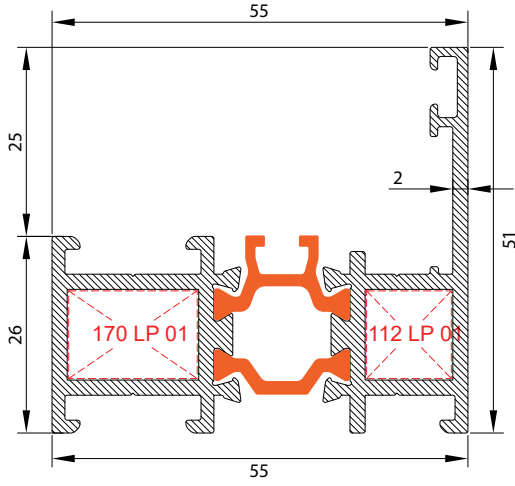


Z55.F.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,322	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	16,294	5,760	5,234	1,660

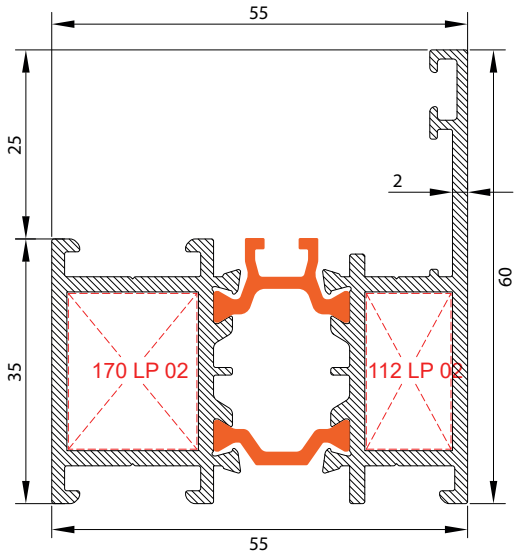


Z55.F.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,534	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	19,272	10,189	6,254	2,597

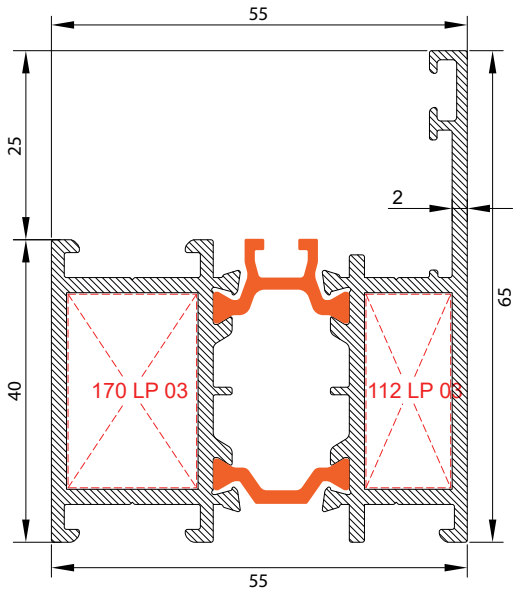


Z55.F.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,642	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	20,898	13,519	6,812	3,239

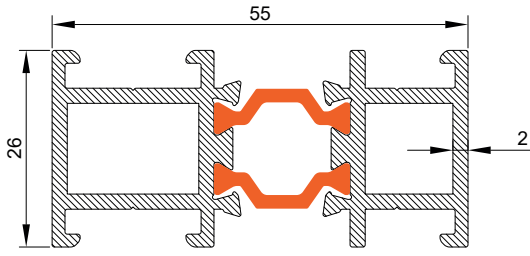


Z55.FH.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,155	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	13,097	2,063	4,690	1,587

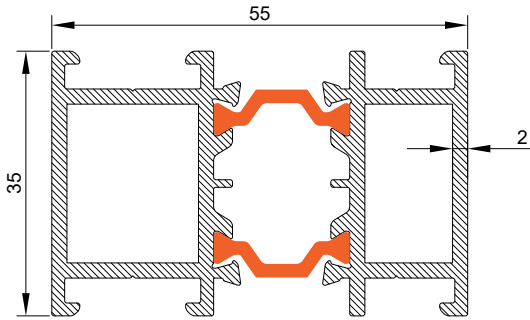


Z55.FH.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,367	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	16,054	5,158	5,710	2,947

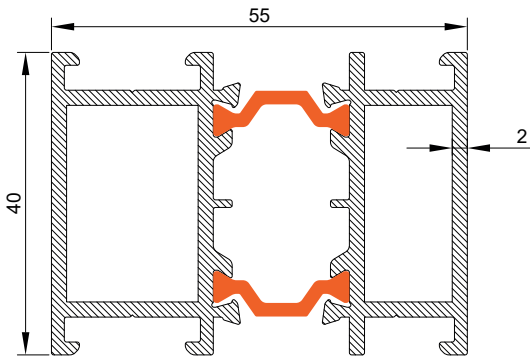


Z55.FH.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,475	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	17,669	7,658	6,270	3,829

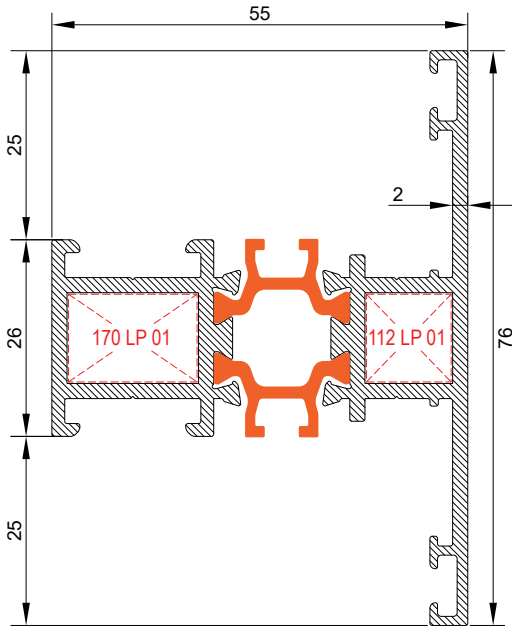


Z55.M.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,489	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	18,789	10,411	5,584	2,740

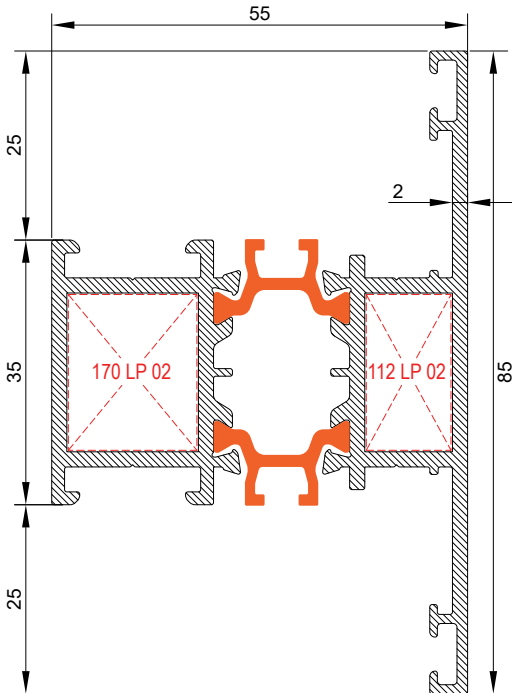


Z55.M.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,700	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	21,880	16,317	6,628	3,839

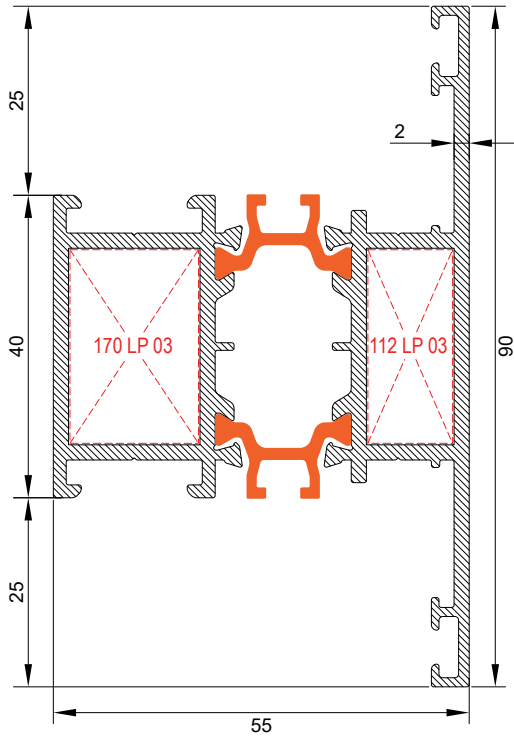


Z55.M.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,808	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	23,555	20,564	6,014	4,570

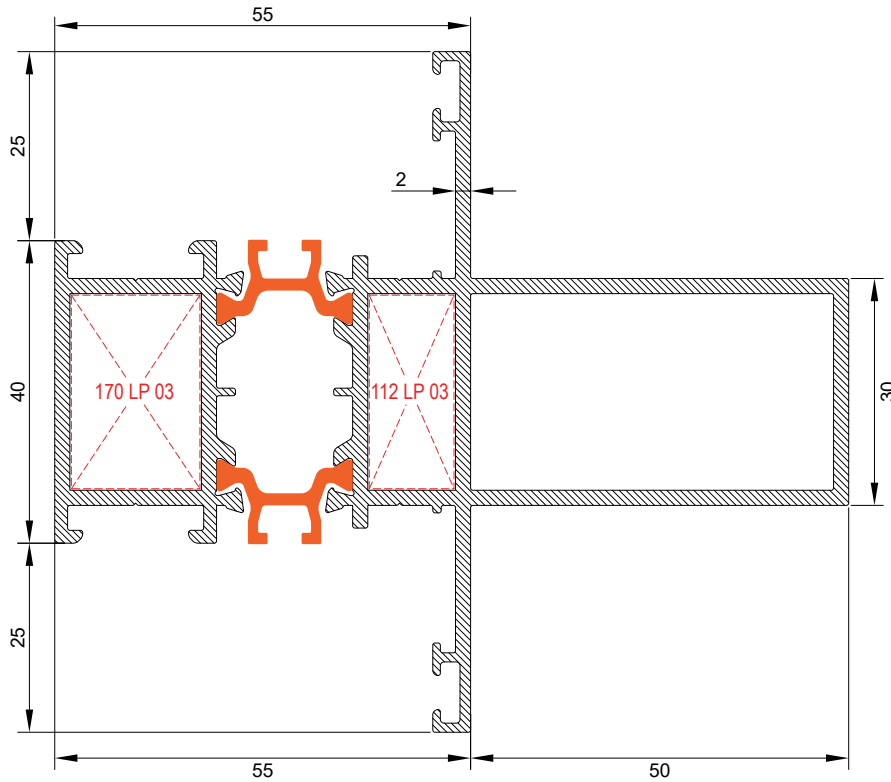


Z55.M.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,489	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	78,639	24,785	13,810	5,508

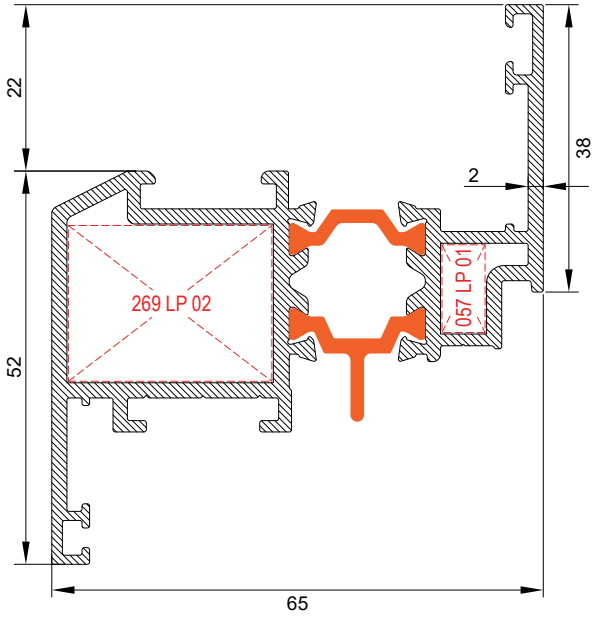


Z55.V01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,616	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	28,623	11,964	8,479	3,174

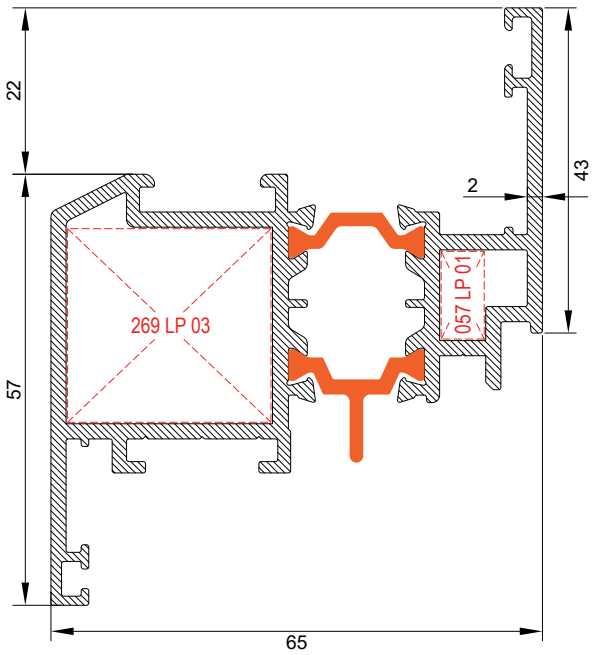


Z55.V02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,763	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	31,592	15,530	9,586	3,878

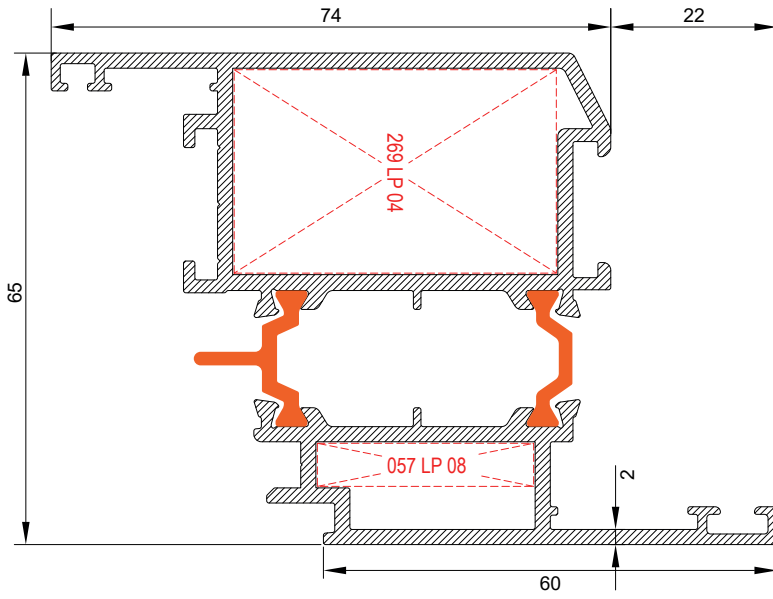


Z55.V03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,135	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	33,565	39,452	6,916	12,011

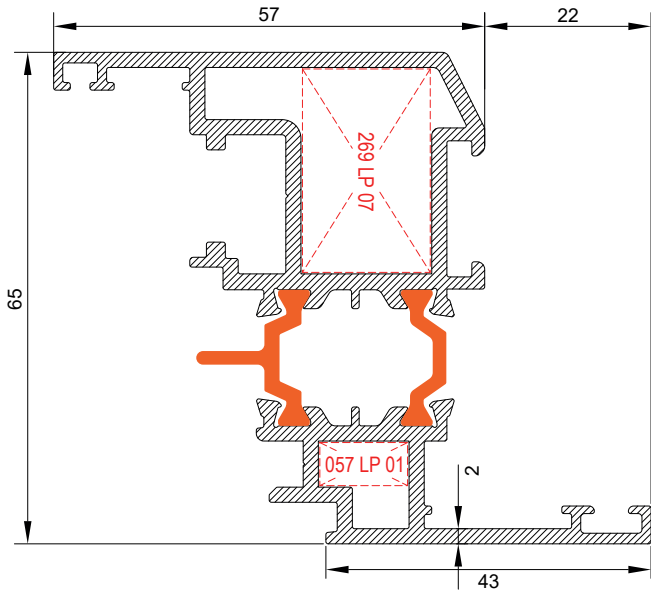


Z55.V04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,815	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	15,151	32,367	3,794	9,628

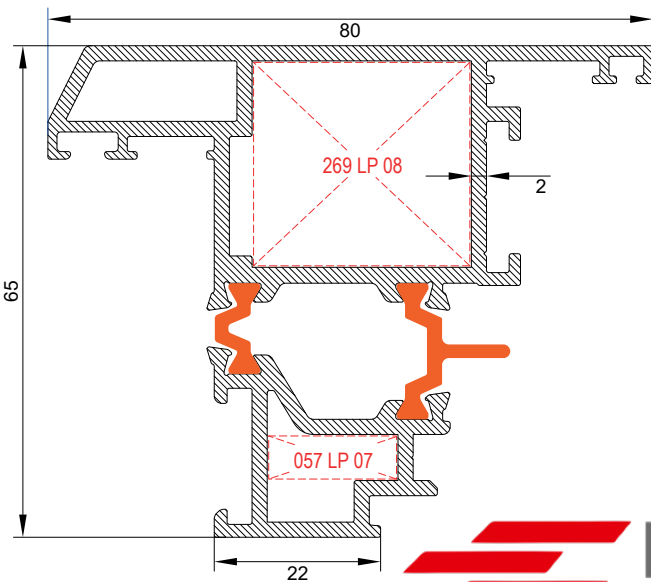


Z55.V07	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,013	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	32,367	22,403	8,318	5,201

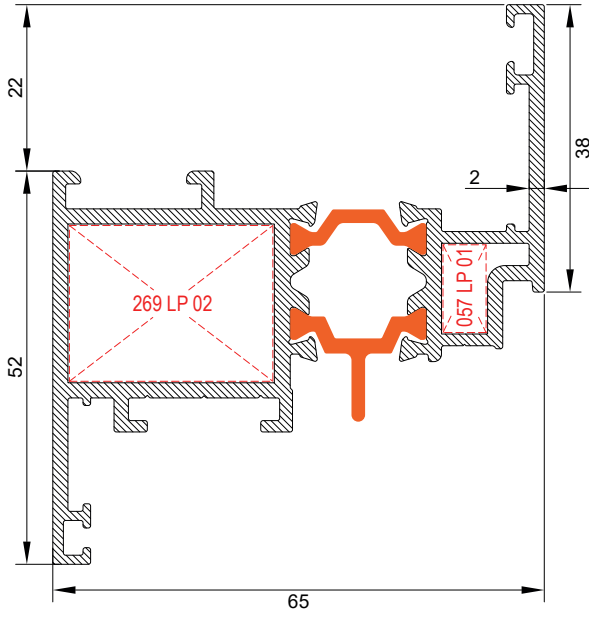


Z55.VF.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,609	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	29,130	11,817	8,558	3,123

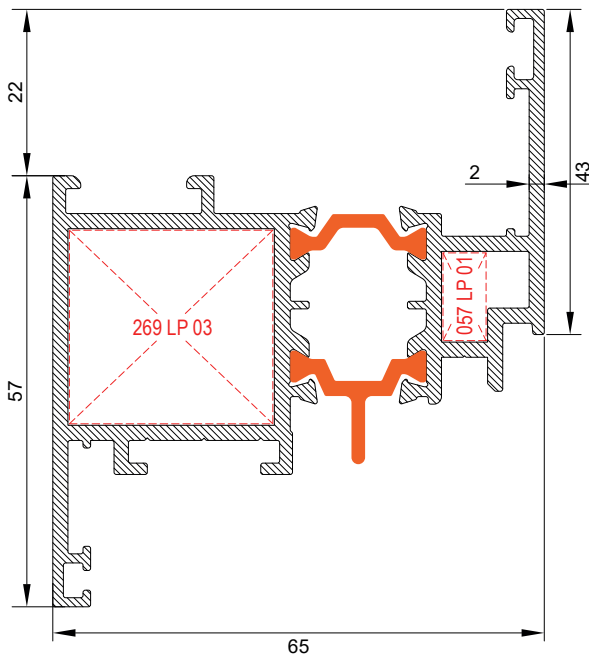


Z55.VF.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,756	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	32,123	15,345	9,673	3,818

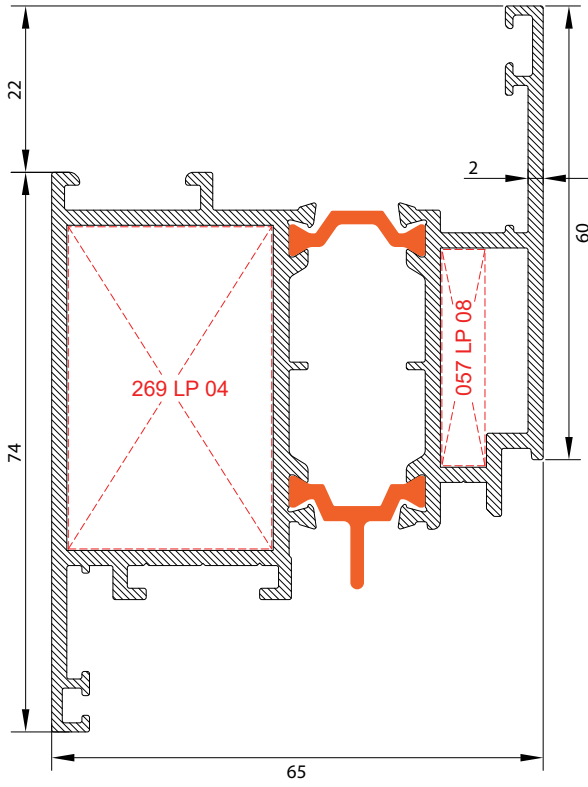


Z55.VF.03	AGIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,128	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ³)	Wy (cm ³)
	40,009	33,215	12,256	6,823

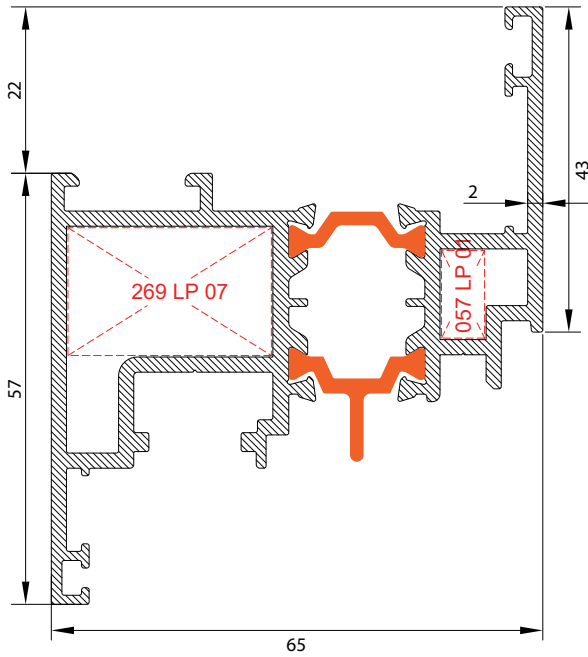


Z55.VF.04	AGIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,808	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ³)	Wy (cm ³)
	32,879	14,968	9,708	3,735

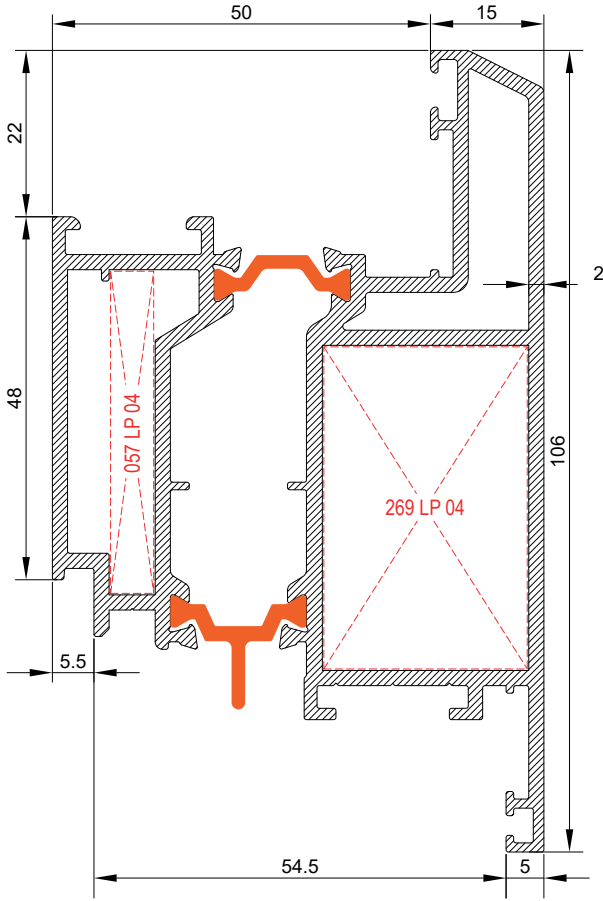


Z55.V.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,673	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	46,228	59,535	12,596	10,593

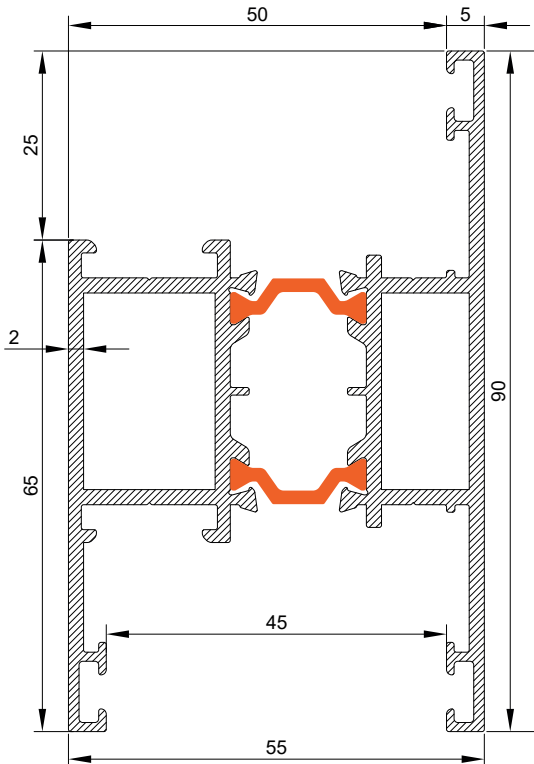


Z55.K.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,914	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	28,653	26,653	9,532	5,569

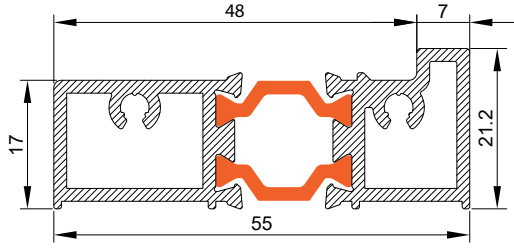


Z55.K.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,967	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	10,190	1,188	3,501	1,051




Z55.K.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,440	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,785	1,028	0,882	0,654

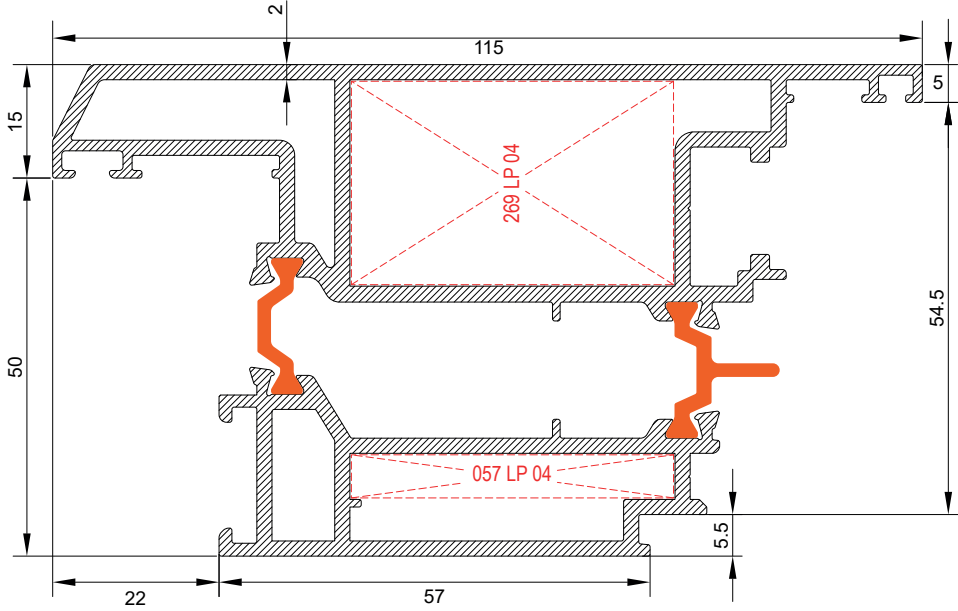

Z55.V.06	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,979	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	80,633	53,272	13,296	14,727

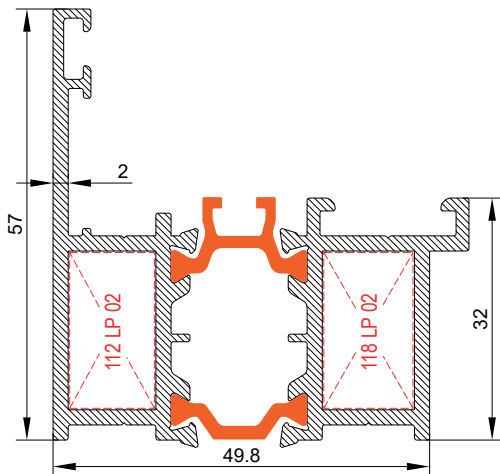


Z55.A.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,433	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	17,064	7,735	5,318	2,043

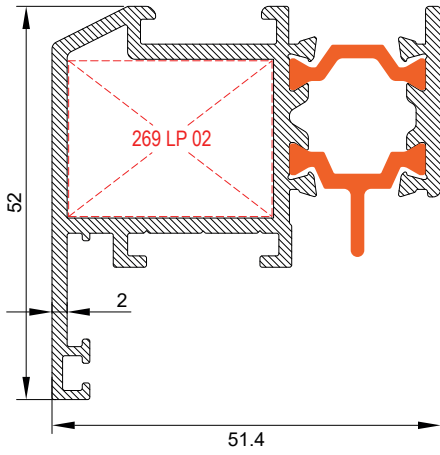


Z55.VG.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,276	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	12,723	7,102	4,307	2,178


ADAPTÖR PROFİLLERİ / ADAPTER PROFILES

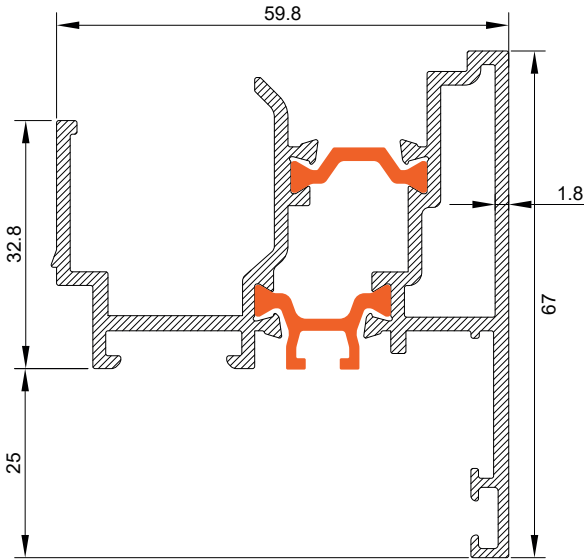


Z55.A.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,440	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	19,507	10,967	5,070	2,809

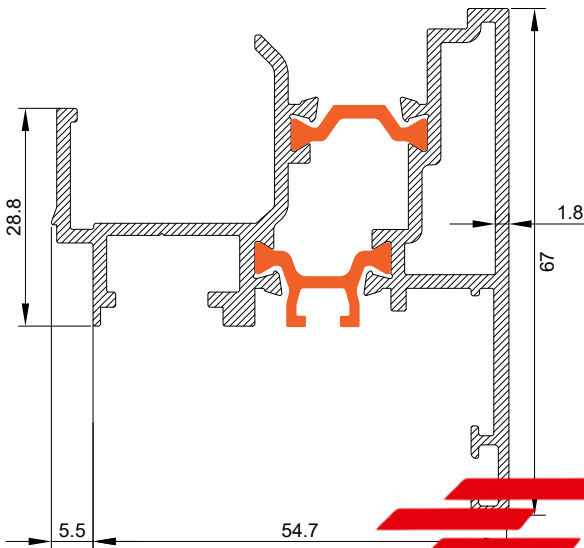


Z55.A.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,441	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	18,324	10,623	4,701	2,719




Z91.P.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,146	6	EN AW6060 T6	
	Jx (cm⁴)	Jy (cm⁴)	Wx (cm⁴)	Wy (cm⁴)
	0,121	0,089	0,139	0,113




Z77.T.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,104	6	EN AW6060 T6	
	Jx (cm⁴)	Jy (cm⁴)	Wx (cm⁴)	Wy (cm⁴)
	0,144	0,005	0,136	0,016

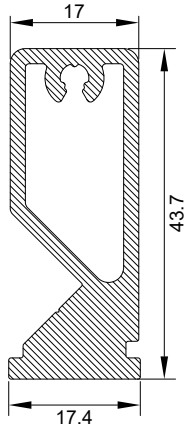


Z91.J.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,928	6	EN AW6060 T6	
	Jx (cm⁴)	Jy (cm⁴)	Wx (cm⁴)	Wy (cm⁴)
	7,506	0,986	3,016	1,024

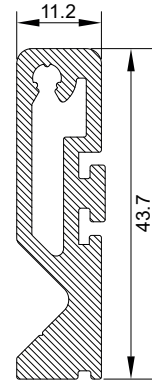


Z91.J.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,807	6	EN AW6060 T6	
	Jx (cm⁴)	Jy (cm⁴)	Wx (cm⁴)	Wy (cm⁴)
	5,447	0,354	2,402	0,557

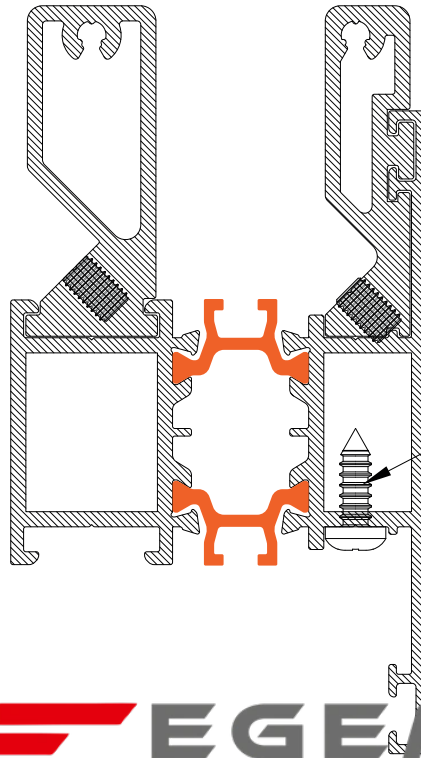


4,2x13 YHB

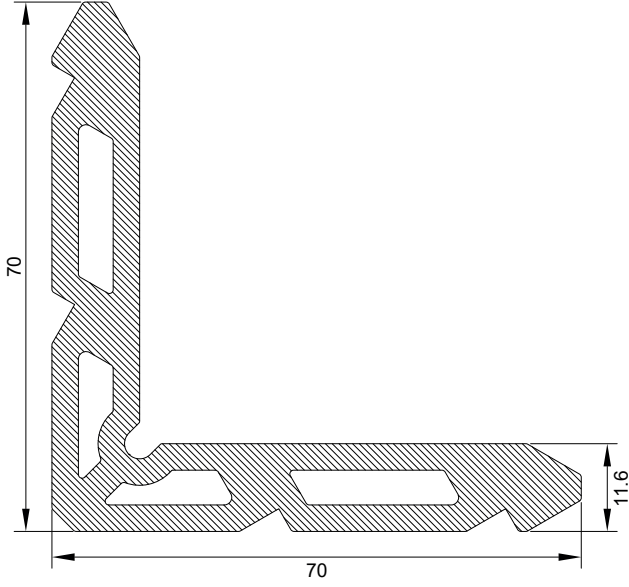


Z77.LP.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,888	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	46,852	46,852	9,709	9,709

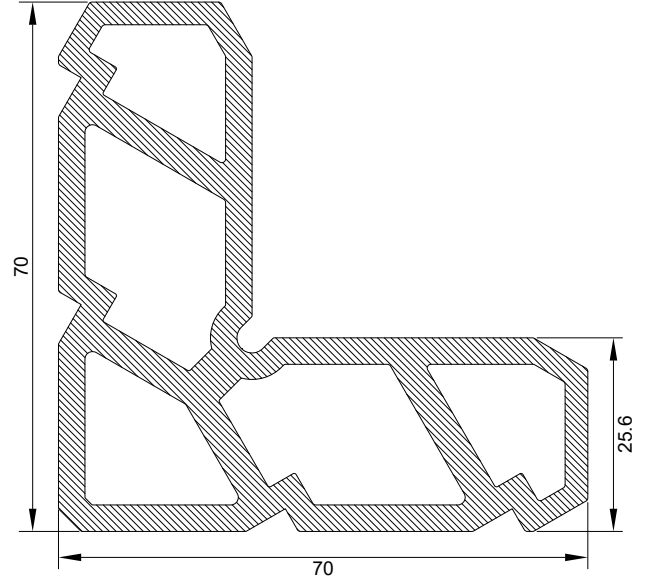


Z77.LP.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	3,322	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	52,519	52,519	11,394	11,394

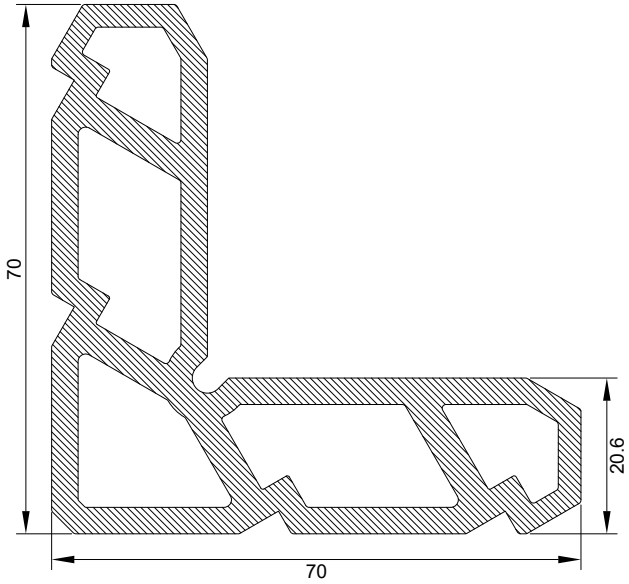


Z77.LP.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	3,090	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	49,206	49,206	10,935	10,935

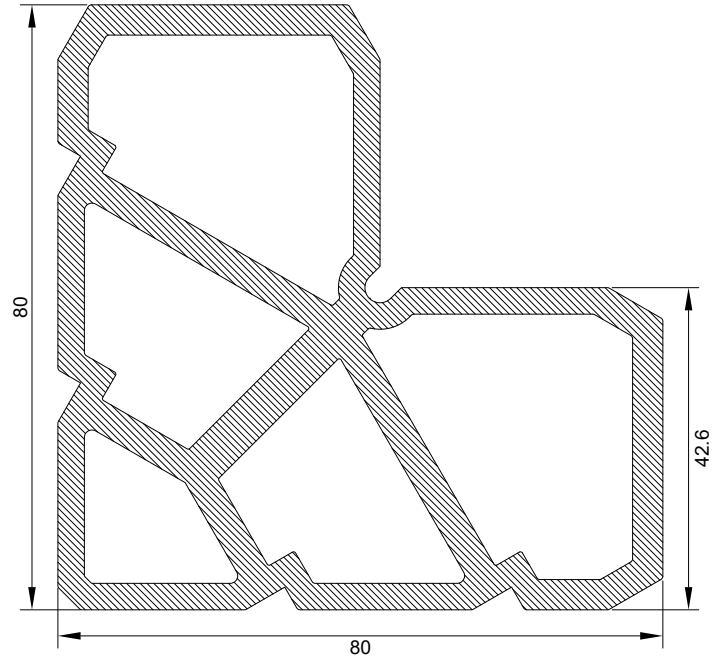


Z77.LP.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	4,570	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	97,115	97,115	20,704	20,704

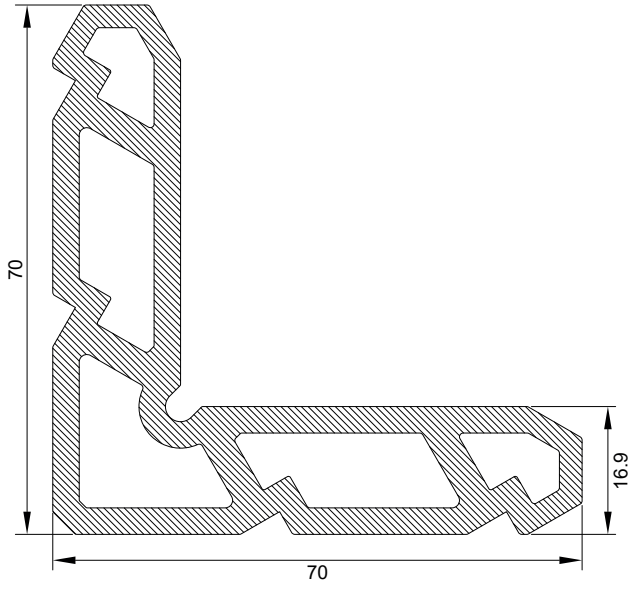


Z77 LP.07	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,951	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	46,766	46,766	10,110	10,110

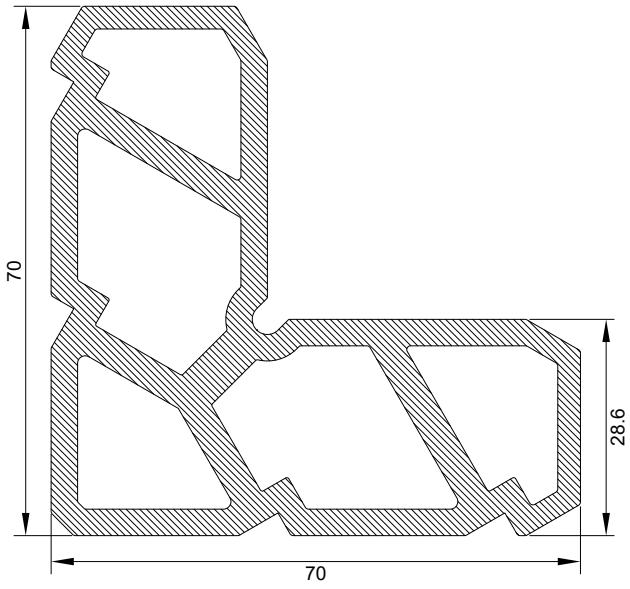


Z77 LP.08	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	3,451	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	54,439	54,439	12,713	12,713

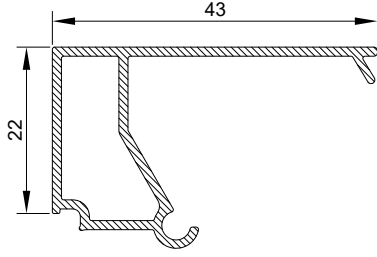


Z77.G.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,365	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,980	1,192	0,680	0,704




Z77.G.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,352	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,528	1,151	0,582	0,693




Z77.G.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,339	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,158	1,107	0,497	0,681




Z77.G.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,326	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,865	1,059	0,426	0,668




Z77.G.06	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,313	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,641	1,008	0,373	0,653




Z77.G.07	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,300	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,480	0,952	0,343	0,635




Z77.G.08	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,288	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,372	0,891	0,338	0,615




Z77.G.09	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,275	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,310	0,825	0,268	0,591




Z77.G.10	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,270	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,270	0,762	0,202	0,566




Z77.G.11	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,199	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,234	0,601	0,169	0,401

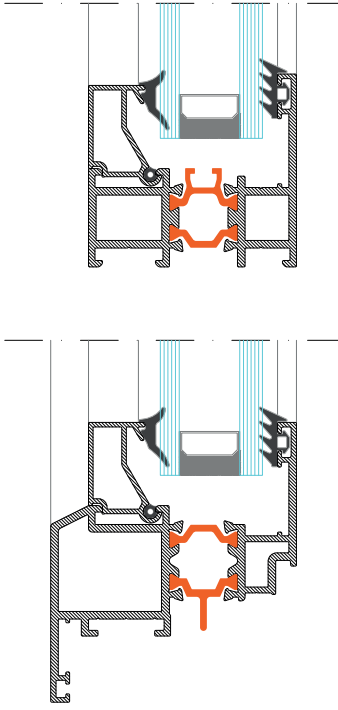

				
	FTL.01.01	FTL.01.02	FTL.01.03	FTL.01.04
Z77.G.04	4 mm	5 mm	6 mm	7 mm
Z77.G.05	8 mm	9 mm	10 mm	11 mm
Z77.G.06	12 mm	13 mm	14 mm	15 mm
Z77.G.07	16 mm	17 mm	18 mm	19 mm
Z77.G.08	20 mm	21 mm	22 mm	23 mm
Z77.G.09	24 mm	25 mm	26 mm	27 mm
Z77.G.10	28 mm	29 mm	30 mm	31 mm
Z77.G.11	32 mm	33 mm	34 mm	35 mm

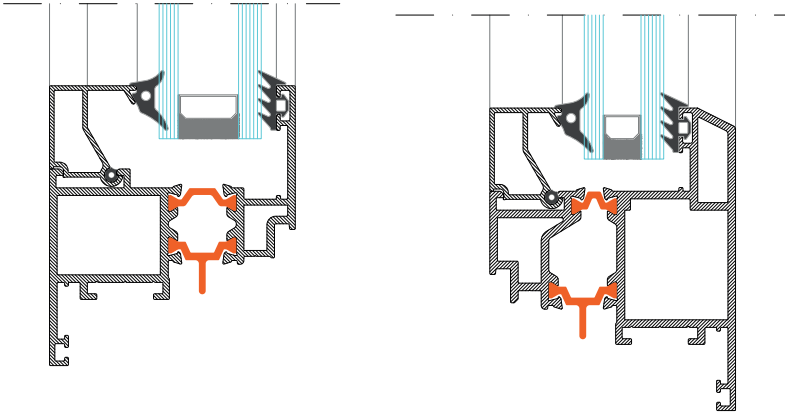


				
	FTL.01.01	FTL.01.02	FTL.01.03	FTL.01.04
Z77.G.02	6 mm	7 mm	8 mm	9 mm
Z77.G.03	10 mm	11 mm	12 mm	13 mm
Z77.G.04	14 mm	15 mm	16 mm	17 mm
Z77.G.05	18 mm	19 mm	20 mm	21 mm
Z77.G.06	22 mm	23 mm	24 mm	25 mm
Z77.G.07	26 mm	27 mm	28 mm	29 mm
Z77.G.08	30 mm	31 mm	32 mm	33 mm
Z77.G.09	34 mm	35 mm	36 mm	37 mm
Z77.G.10	38 mm	39 mm	40 mm	41 mm

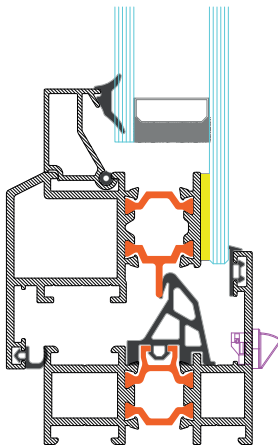


				
	FTL.01.01	FTL.01.02	FTL.01.03	FTL.01.04
Z77.G.03	-	-	-	-
Z77.G.04	-	-	-	-
Z77.G.05	-	-	-	-
Z77.G.06	-	-	-	-
Z77.G.07	-	20 mm	21 mm	22 mm
Z77.G.08	23 mm	24 mm	25 mm	26 mm
Z77.G.09	27 mm	28 mm	29 mm	30 mm
Z77.G.10	31 mm	32 mm	33 mm	34 mm
Z77.G.11	35 mm	36 mm	37 mm	38 mm


FTL.01.01

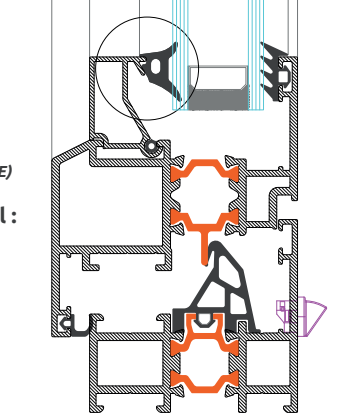İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
81 gr/m**Paket / Package:**
185 m / 15 kg


FTL.01.06

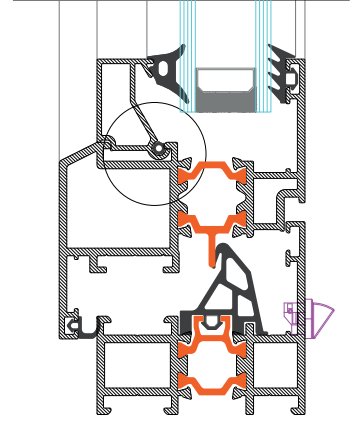SIZDIRMAZLIK FİTİLİ
SEALING GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
10 gr/m**Paket / Package:**
1500 m / 15 kg


FTL.01.02

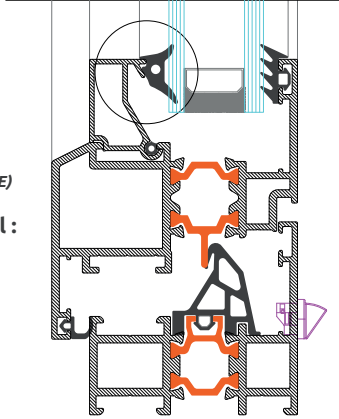İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
75 gr/m**Paket / Package:**
200 m / 15 kg


FTL.01.07

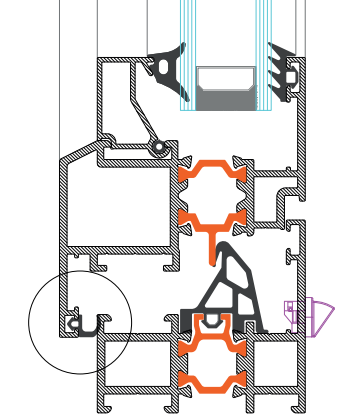İÇ BİNİ FİTİLİ
INTERNAL REBATE GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
28 gr/m**Paket / Package:**
535 m / 15 kg


FTL.01.03

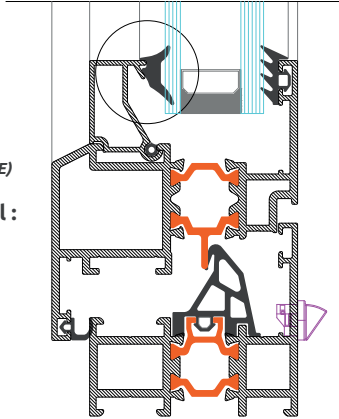İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
69 gr/m**Paket / Package:**
217 m / 15 kg


FTL.01.08

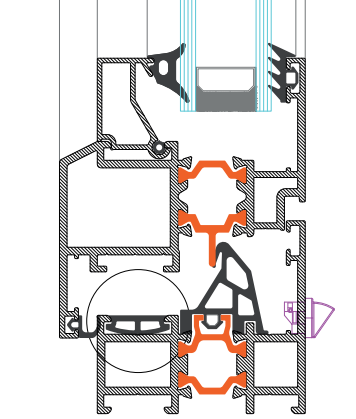KANAL KAPAMA FİTİLİ
SEALING GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
71 gr/m**Paket / Package:**
211 m / 15 kg


FTL.01.04

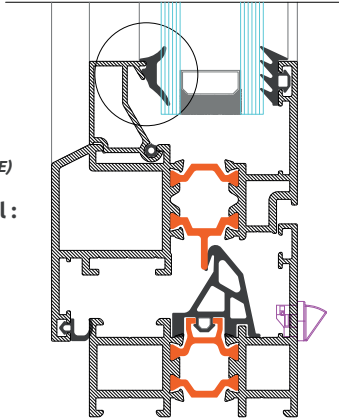İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
55 gr/m**Paket / Package:**
272 m / 15 kg


FTL.01.27

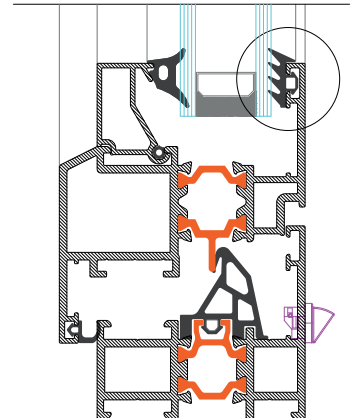DİŞ CAM FİTİLİ
GLAZING GASKET (OUTSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
72 gr/m**Paket / Package:**
208 m / 15 kg


FTL.01.43

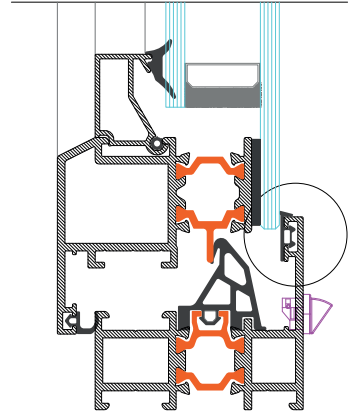**BİNİ FİTİLİ**
SEALING GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
30gr/m**Paket / Package:**
500 m / 15 kg

FTL.01.44

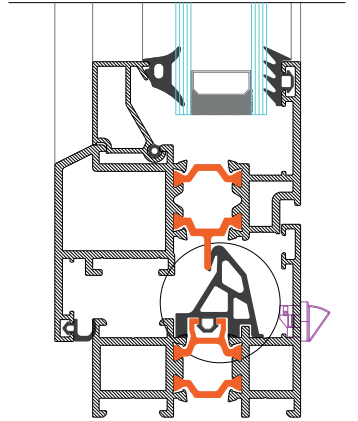**TOZLUK FİTİLİ**
CENTRAL GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
224 gr/m**Paket / Package:**
67 m / 15 kg

FTL.01.51

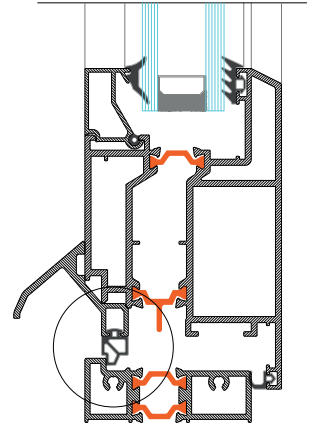**EŞİK FİTİLİ**
THRESHOLD GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
60 gr/m**Paket / Package:**
250 m / 15 kg


CC-004



KÖŞE ÇAVUŞU
SERGEANT CORNER

Malzeme / Material :
Paslanmaz Çelik / Stainless Steel

Paket / Package:
100 adet / 100 pieces

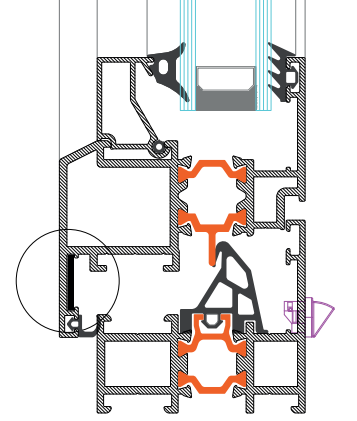


TK.01.01




TAHLİYE KAPAĞI
DRAINAGE COVER CAP

Malzeme / Material :
PVC

Paket / Package:
100 adet / 100 pieces

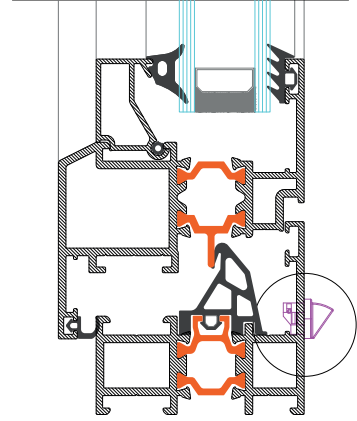

116 ZJ 01

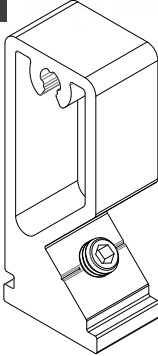


ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 11,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z55.M.01

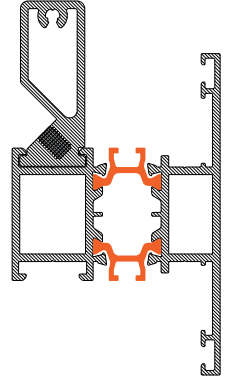

116 ZJ 02




ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 11,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z55.M.01

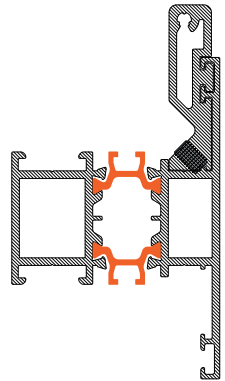

206 ZJ 01

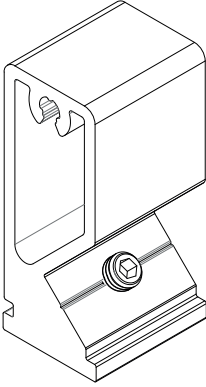


ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 20,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z55.M.02

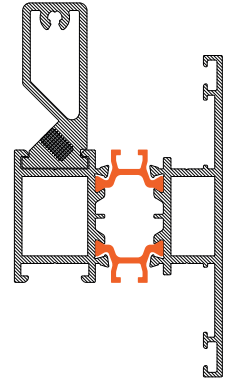

206 ZJ 02

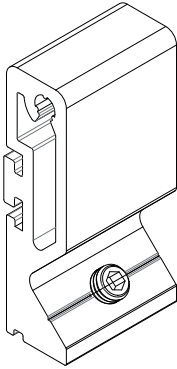


ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 20,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z55.M.02

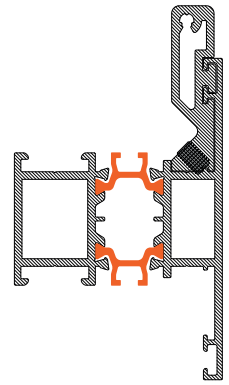

256 ZJ 01

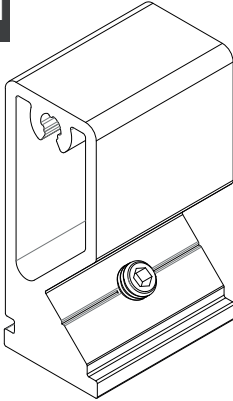


ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 25,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z55.M.03 - Z55.M.04

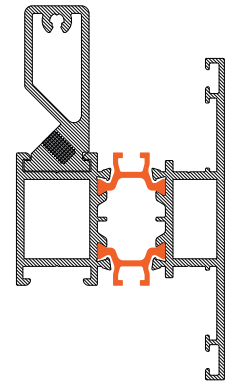

256 ZJ 02

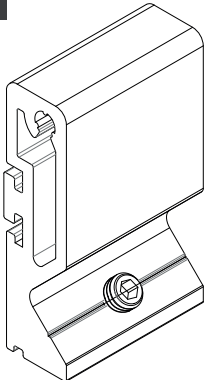


ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 25,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z55.M.03 - Z55.M.04

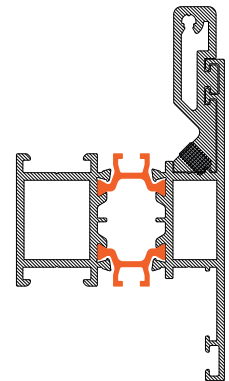

ADP.02.12

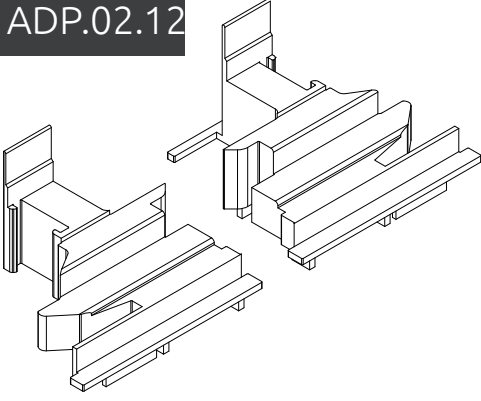

ADAPTÖR KAPAĞI
ADAPTER CAP

Malzeme / Material : PVC

