


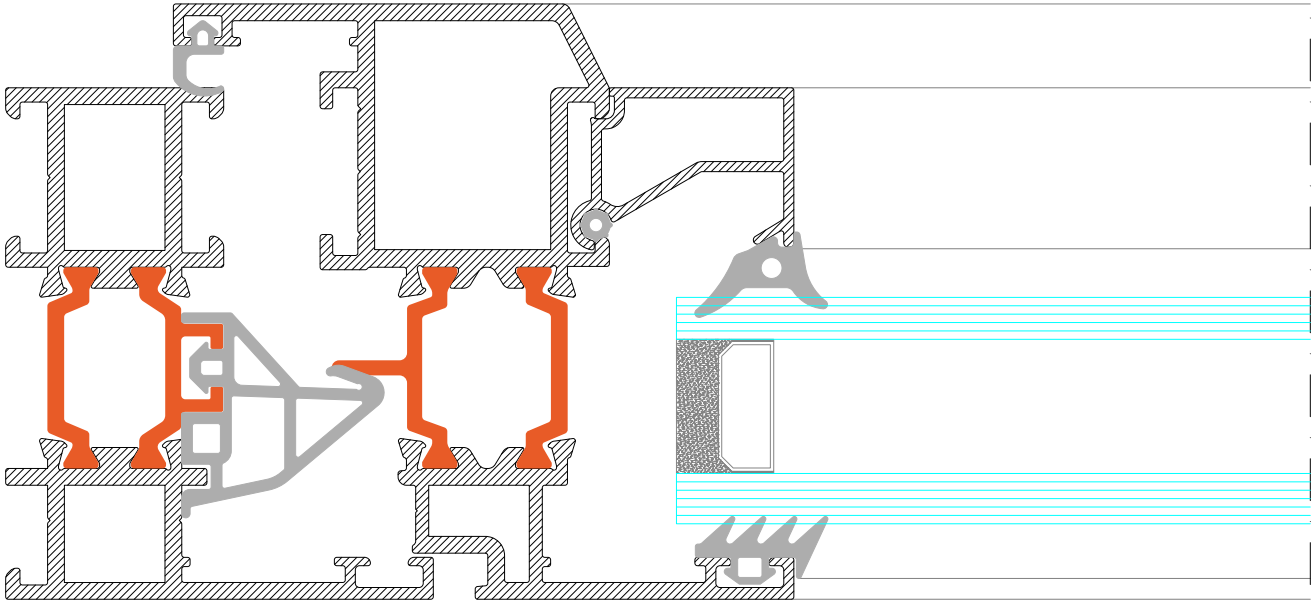

KASA DERİNLİĞİ / FRAME DEPTH

61mm

KANAT DERİNLİĞİ / VENT DEPTH

71mm

PROFİL ET KALINLIĞI / PROFILE WALL THICKNESS

2mm

CAM KALINLIĞI / GLASS THICKNESS


4 mm - 37 mm

POLİAMİD BARİYER UZUNLUĞU / POLYAMIDE STRIP LENGHT


24 mm

ISI YALITIM DEĞERİ (Uf) / THERMAL INSULATION VALUE (Uf)

-2,79 W/m².K

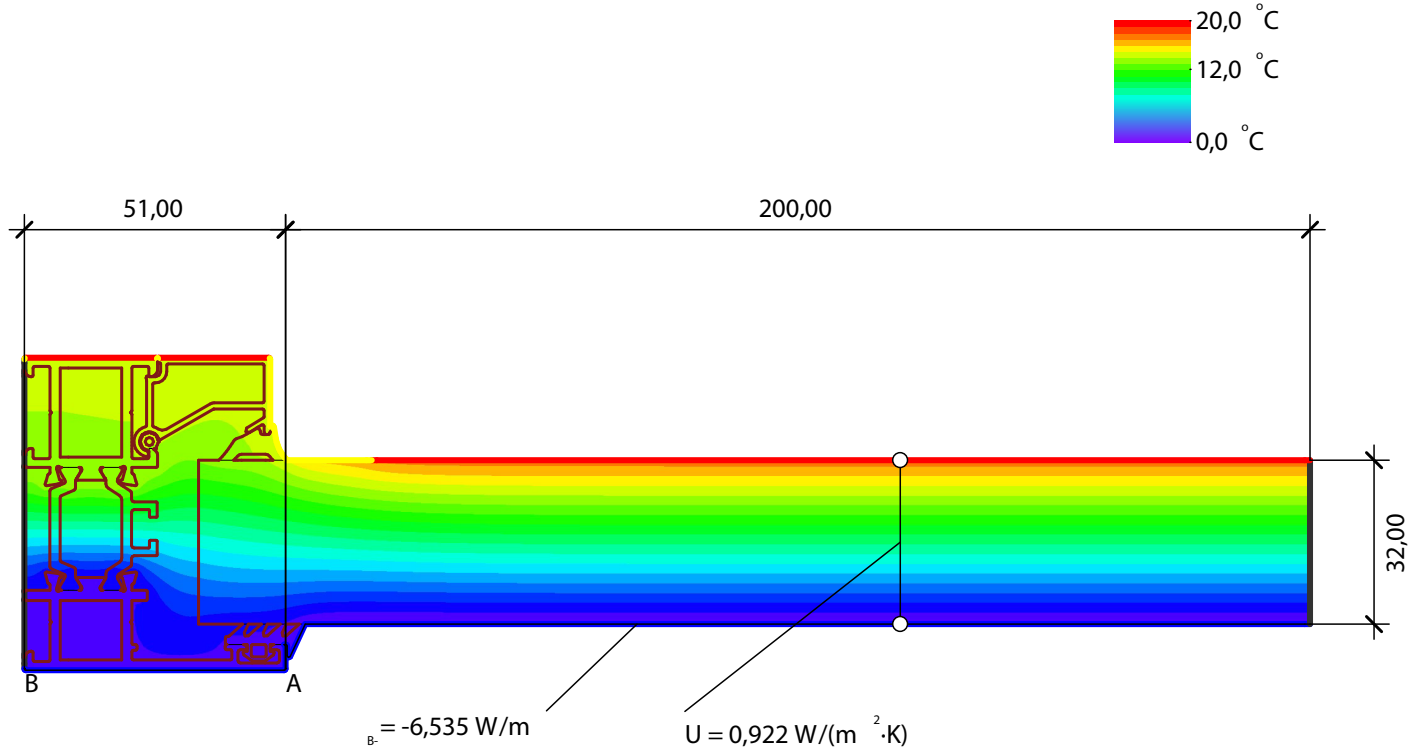


$$U_{fA,B} = \frac{\frac{6,535}{20,0} - 0,922 \cdot 0,2}{0,051} = 2,79 \text{ W/(m}^2 \cdot \text{K)}$$




Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	[°C]	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000		0,040
Panel	0,035	Interior, frame, normal	20,000		0,130
Polyamid 6.6 with 25% glass fibre	0,300	Interior, frame, reduced	20,000		0,200
Unventilated air cavity *		Symmetry/Model section	0,000		

* EN ISO 10077-2:2017, 6.4.3/anisotrop

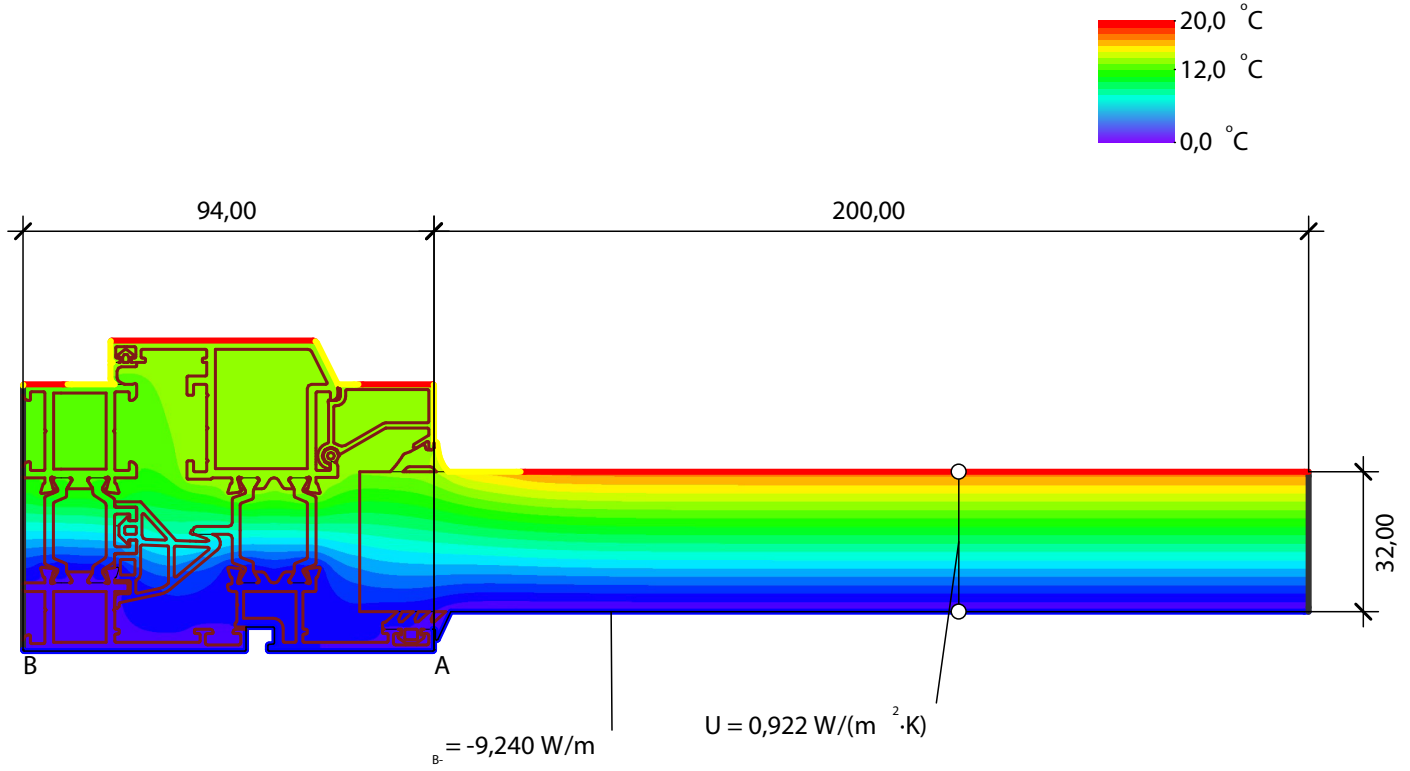

$$U_{f,A,B} = \frac{\frac{9,24}{20,0} - 0,922 \cdot 0,2}{0,094} = 2,95 \text{ W/(m}^2 \cdot \text{K)}$$




Material

[W/(m·K)]


Boundary Condition $q[\text{W/m}^2]$ $[\text{°C}]$ $R[(\text{m}^2 \cdot \text{K})/\text{W}]$

Aluminium (Si Alloys)	160,000	Epsilon 0.9		0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000	0,040
Panel	0,035	Interior, frame, normal	20,000	0,130
Polyamid 6.6 with 25% glass fibre	0,300	Interior, frame, reduced	20,000	0,200
Slightly ventilated air cavity *		Symmetry/Model section	0,000	
Unventilated air cavity *				

* EN ISO 10077-2:2017, 6.4.3/anisotrop

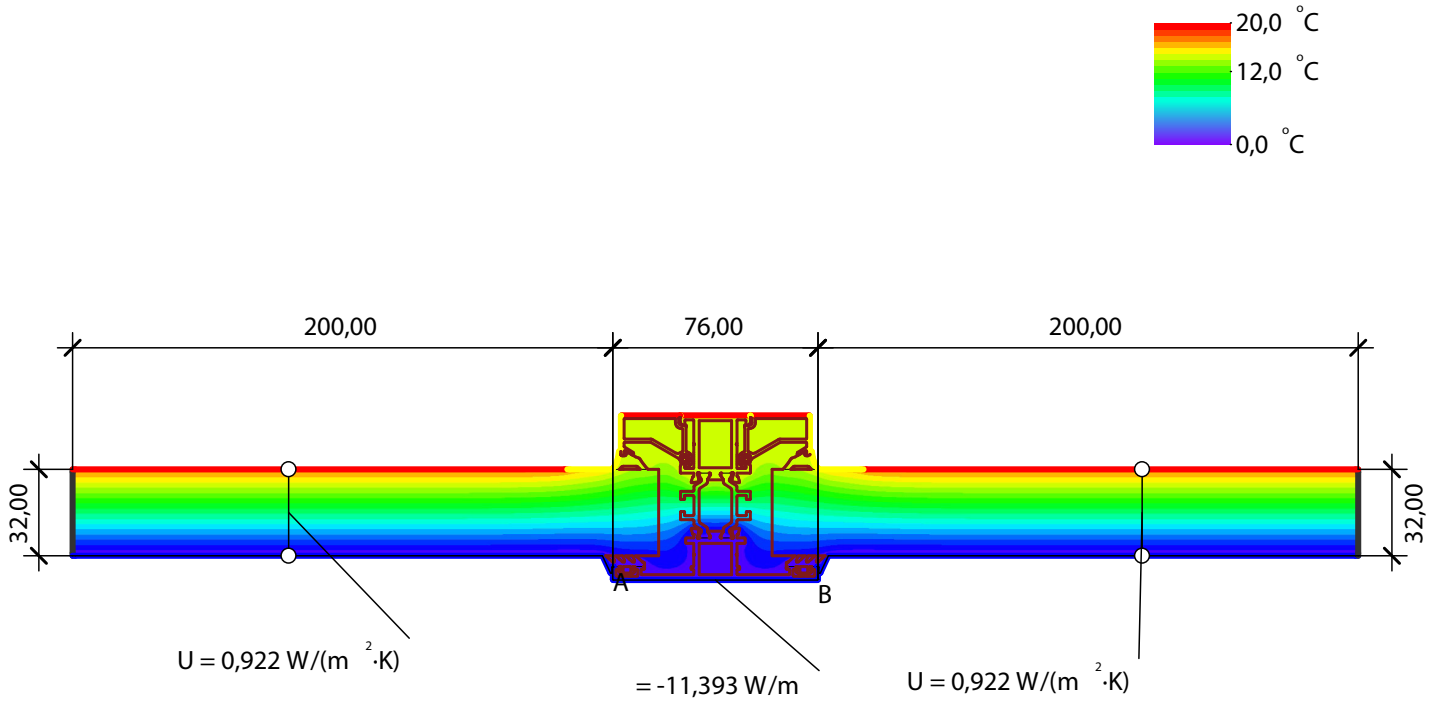

$$U_{f,A,B} = \frac{\frac{11,393}{20,0} - 0,922 \cdot 0,2 - 0,922 \cdot 0,2}{0,076} = 2,64 \text{ W/(m}^2 \cdot \text{K)}$$




Material

[W/(m·K)]


Boundary Condition q[W/m²] [°C] R[(m²·K)/W]

Aluminium (Si Alloys)	160,000	Epsilon 0.9		0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000	0,040
Panel	0,035	Interior, frame, normal	20,000	0,130
Polyamid 6.6 with 25% glass fibre	0,300	Interior, frame, reduced	20,000	0,200
Unventilated air cavity *		Symmetry/Model section	0,000	


* EN ISO 10077-2:2017, 6.4.3/anisotrop

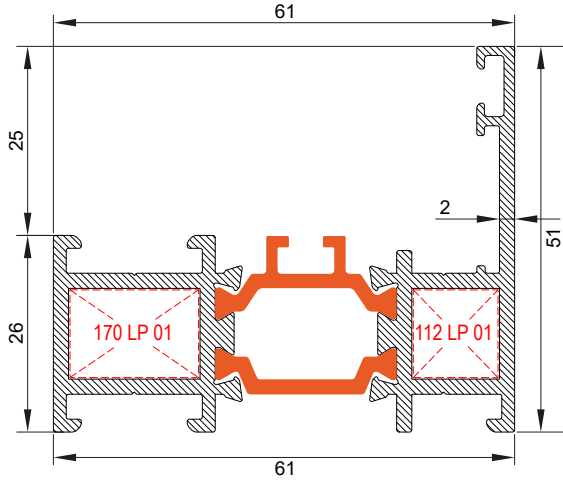


Z61.F.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,363	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	21,329	5,760	6,216	1,660

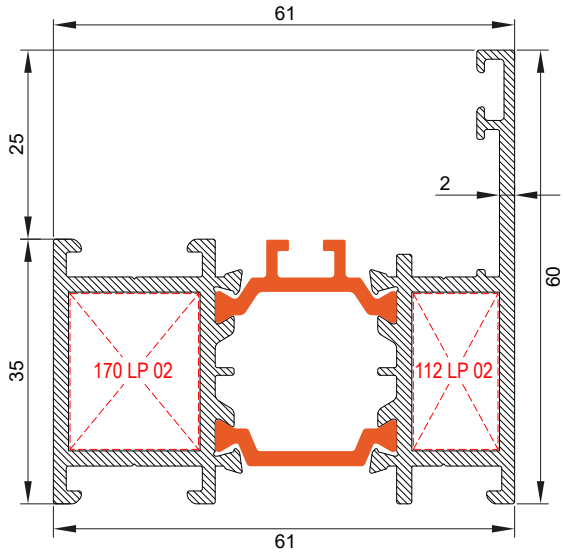


Z61.F.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,575	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	25,203	10,189	7,419	2,597

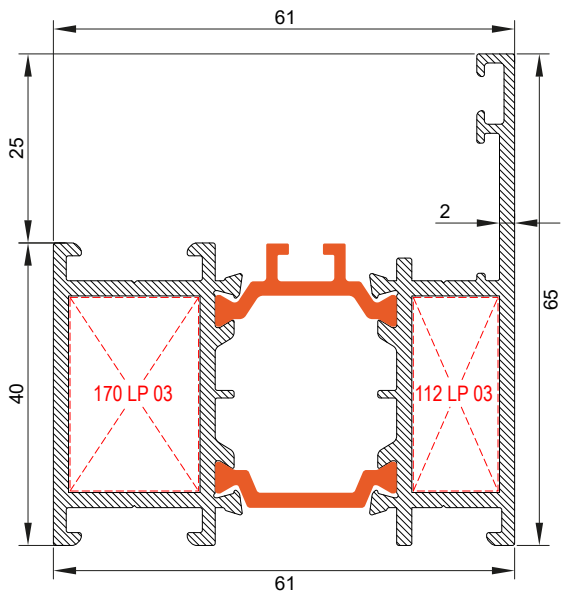


Z61.F.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,766	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	27,304	13,519	8,073	3,239

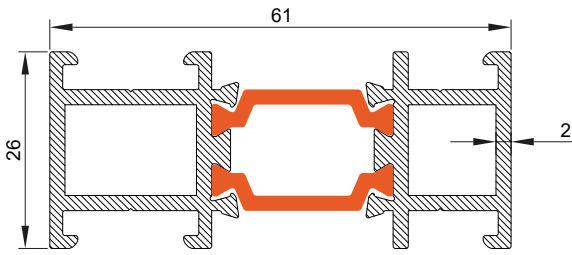


Z61.FH.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,199	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	17,295	2,063	5,630	1,587

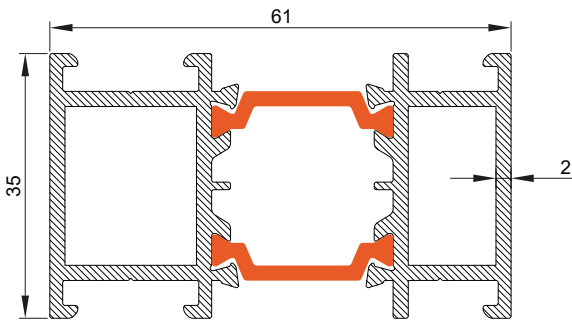


Z61.FH.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,411	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	21,146	5,158	6,833	2,947

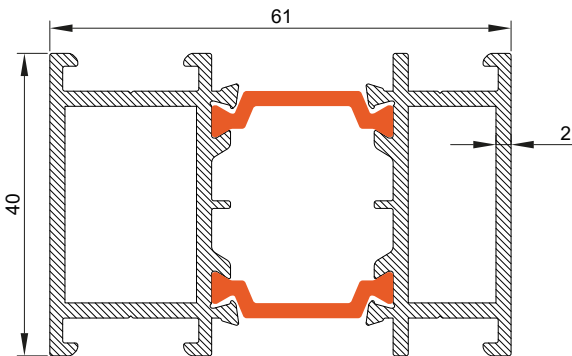


Z61.FH.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,519	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	23,235	7,658	7,490	3,829

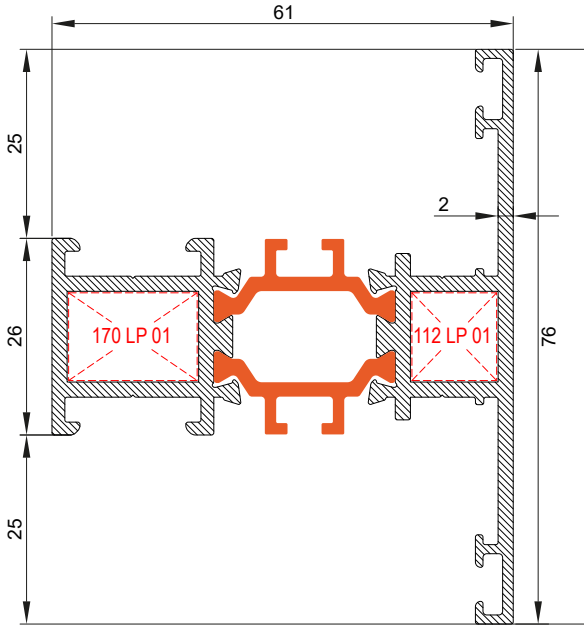


Z61.M.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,527	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	24,478	10,411	6,592	2,740

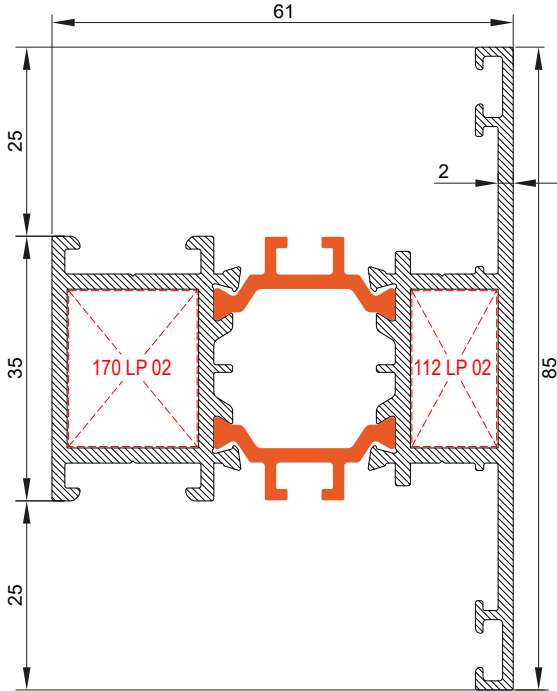


Z61.M.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,738	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	28,493	16,317	7,821	3,839

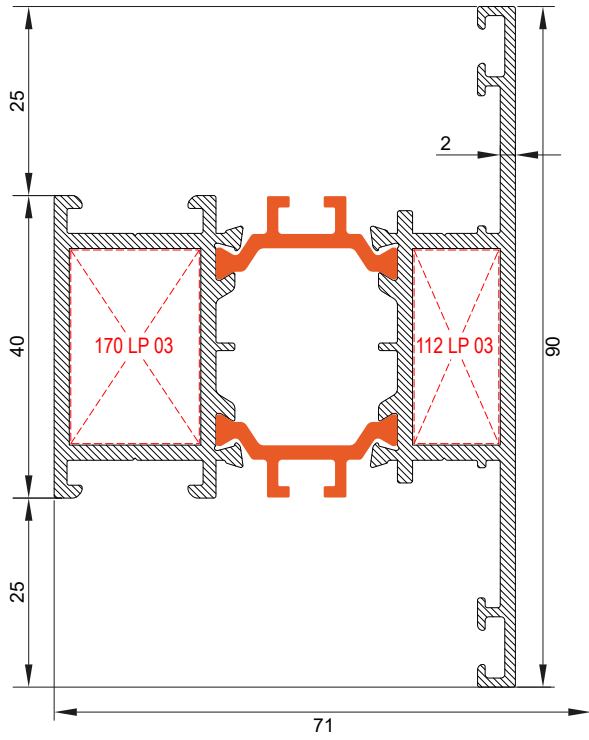


Z61.M.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,846	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	30,655	20,564	8,483	4,570

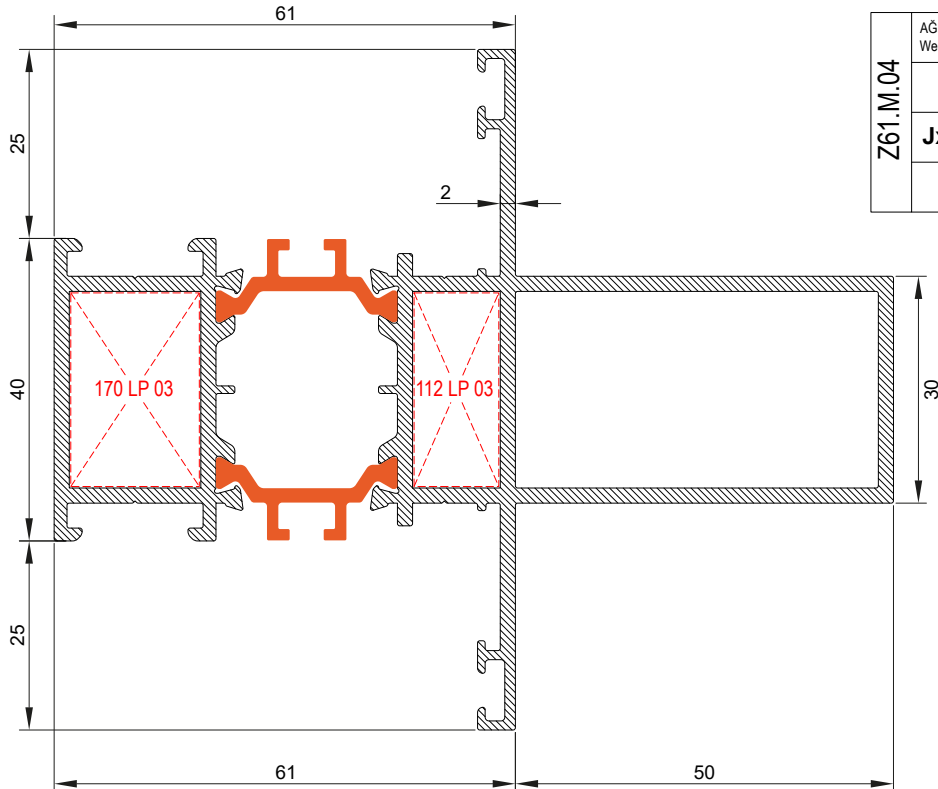


Z61.M.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,527	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	90,712	24,785	15,430	5,508

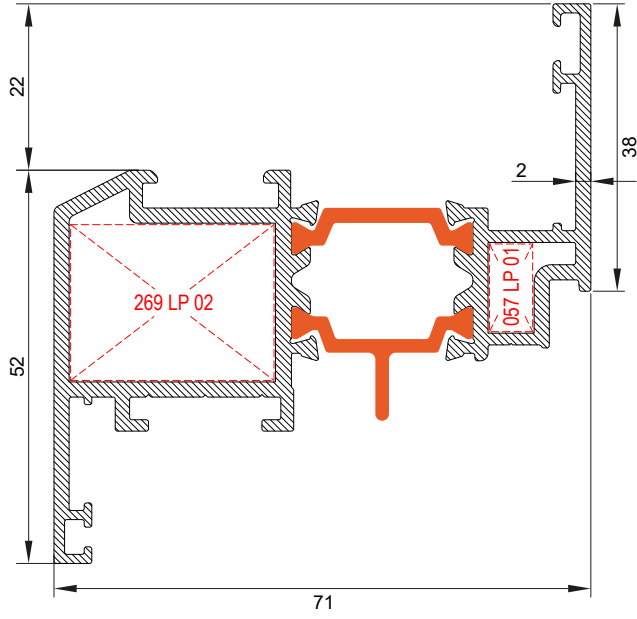


Z61.V.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,649	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	35,512	11,964	9,470	3,174

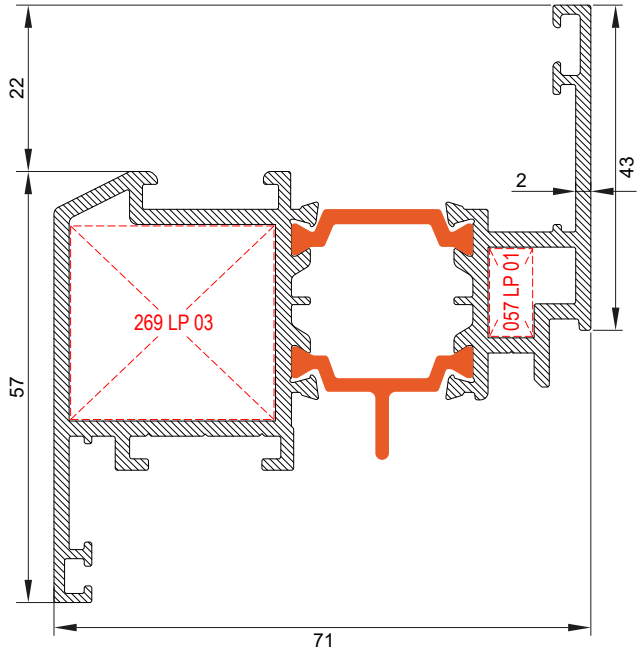


Z61.V.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,796	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	39,253	15,530	10,728	3,878

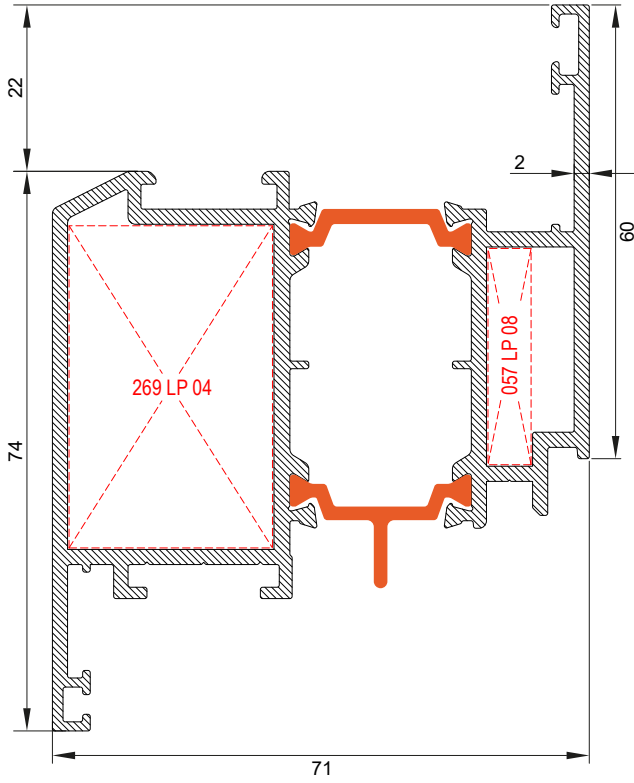


Z61.V.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,168	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	48,999	33,565	13,737	6,916

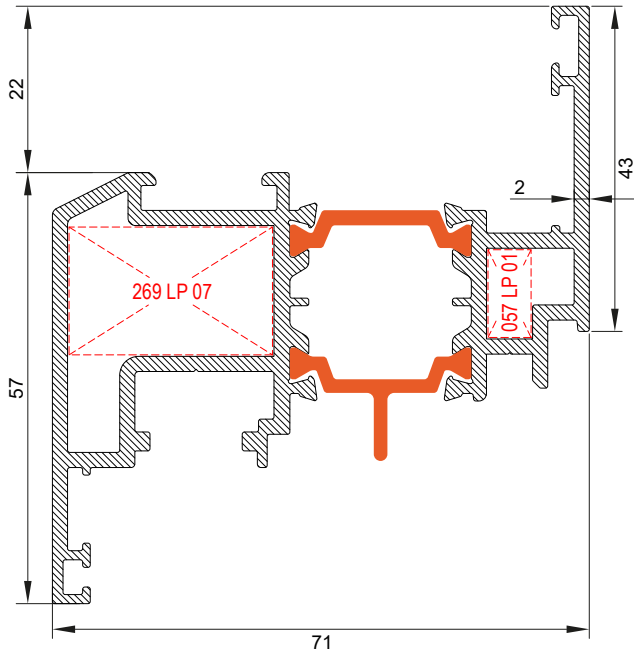


Z61.V.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,848	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	40,227	15,151	10,777	3,794

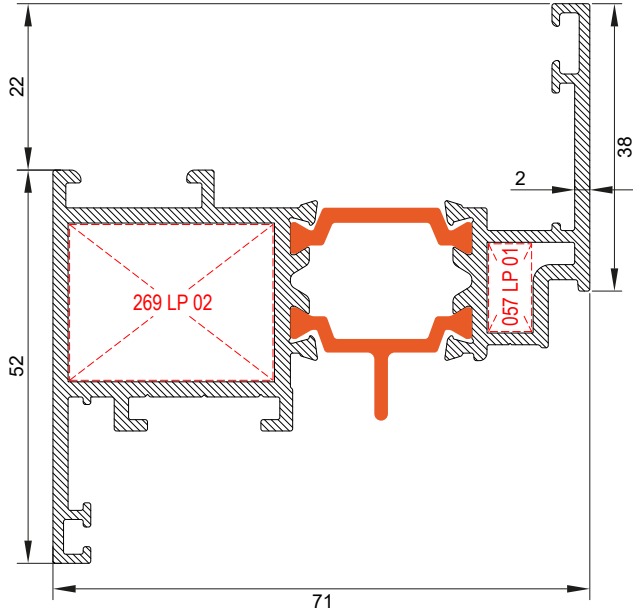


Z61.VF.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,642	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	36,088	11,817	9,554	3,123

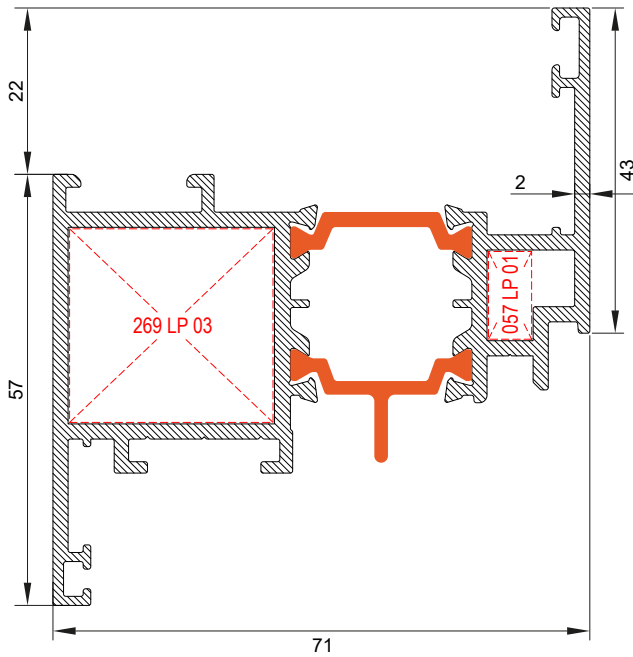


Z61.VF.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,789	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	39,856	15,345	10,821	3,818

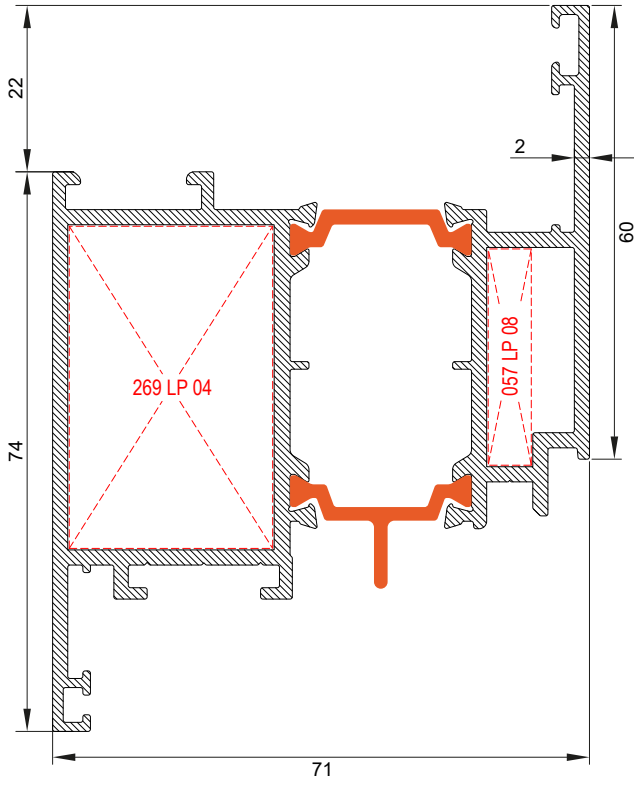

Z61.VF.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,160	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	49,630	33,215	13,838	6,823

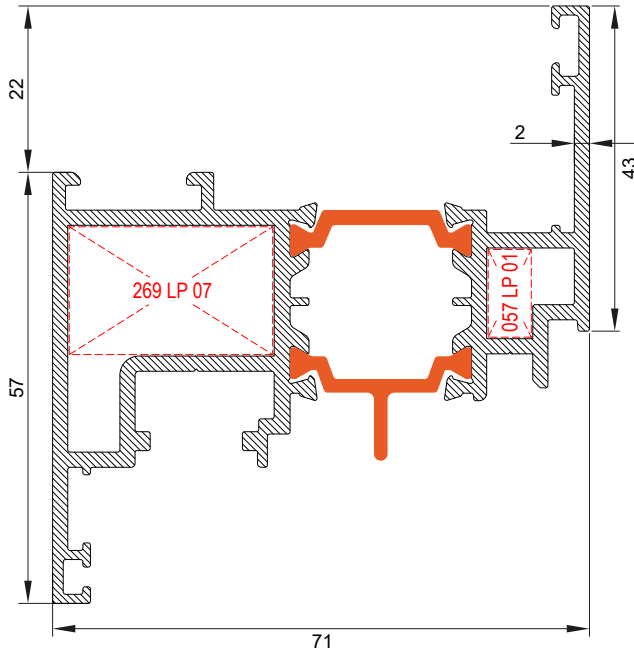


Z61.VF.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,841	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	40,808	14,968	10,864	3,735

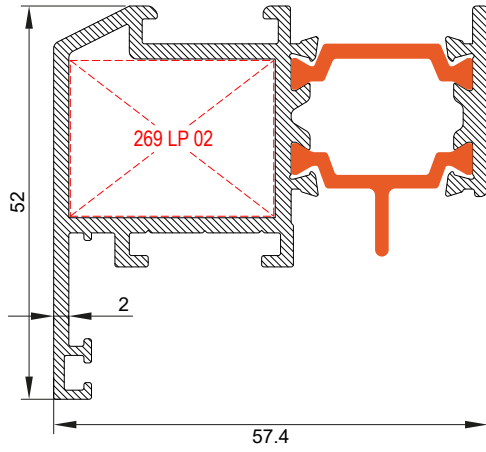


Z61.VG.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,309	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	15,561	7,102	4,522	2,178

— KANAT VE ETEK PROFİLLERİ / VENT AND THRESHOLD PROFILES —

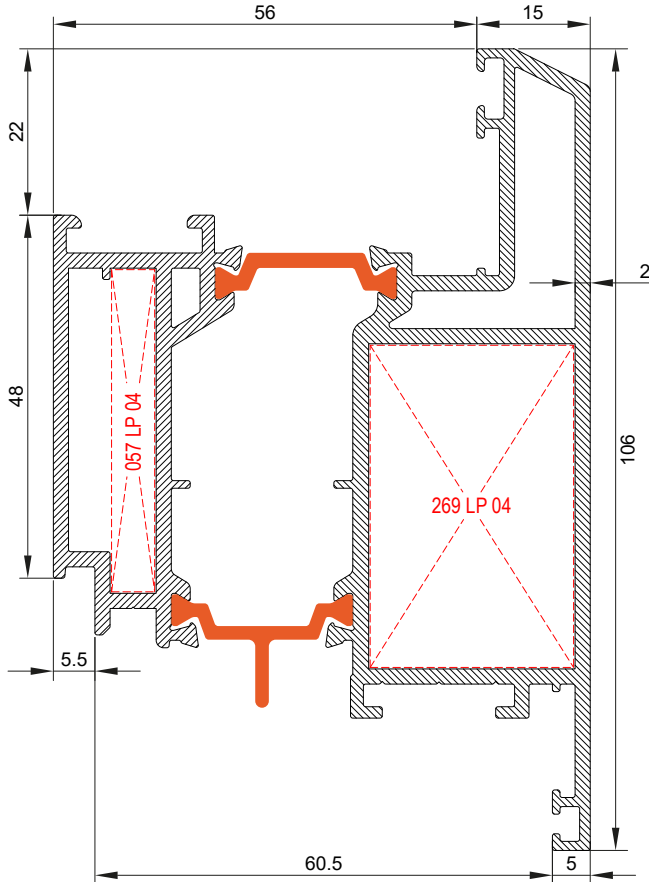


Z61.V.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,743	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	58,646	60,028	14,465	10,680

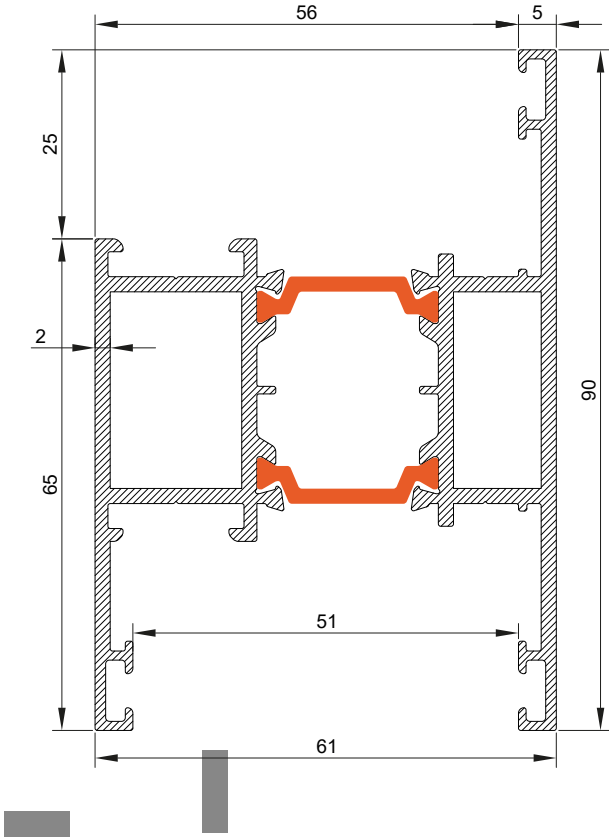


Z61.K.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,958	6	ENAW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	36,919	26,653	11,134	5,569


EŞİK PROFİLLERİ / THRESHOLD PROFILES

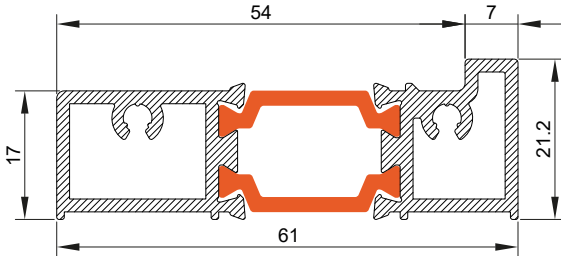


Z61.K.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,011	6	ENAW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	13,581	1,188	4,233	1,051




Z55.K.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,440	6	ENAW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,785	1,028	0,882	0,654

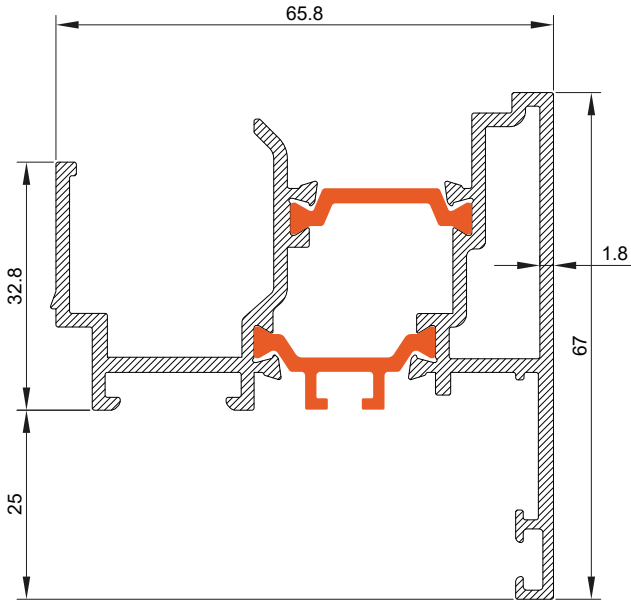


Z61.A.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,481	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	25,090	10,967	5,996	2,809

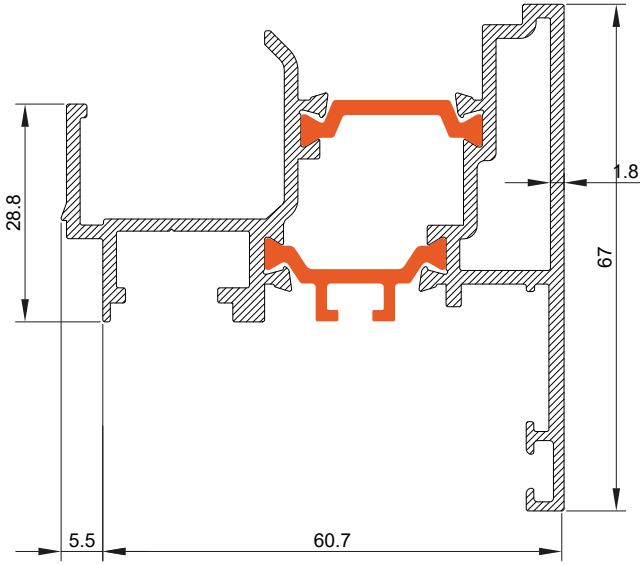


Z61.A.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,482	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	23,745	10,623	5,607	2,719




Z91.P.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,146	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,121	0,089	0,139	0,113




Z77.T.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,104	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,144	0,005	0,136	0,016

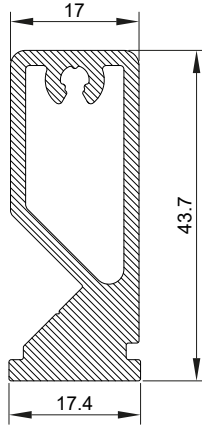


Z91.J.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,104	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,144	0,005	0,136	0,016

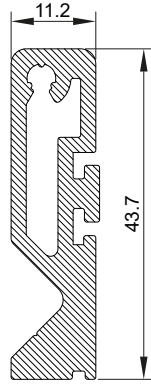


Z91.J.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,104	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,144	0,005	0,136	0,016

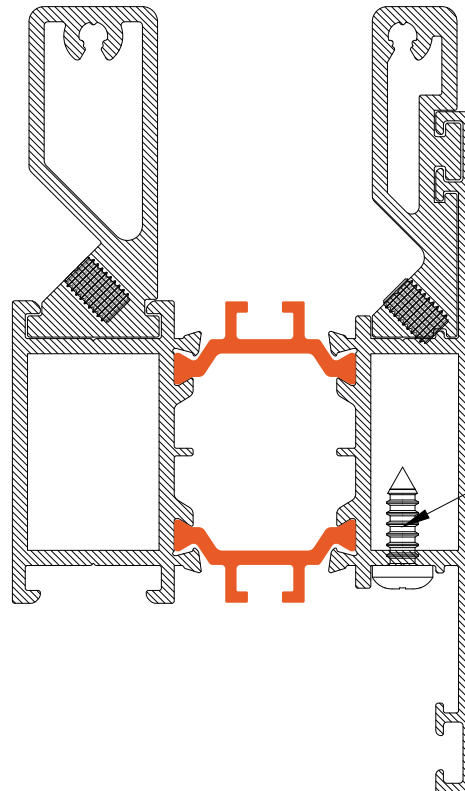


4,2x13 YHB

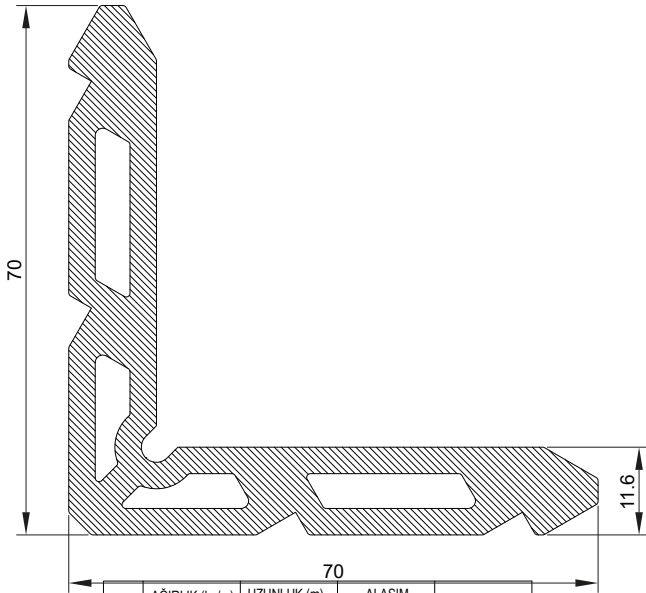


Z77.LP.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,888	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	46,852	46,852	9,709	9,709

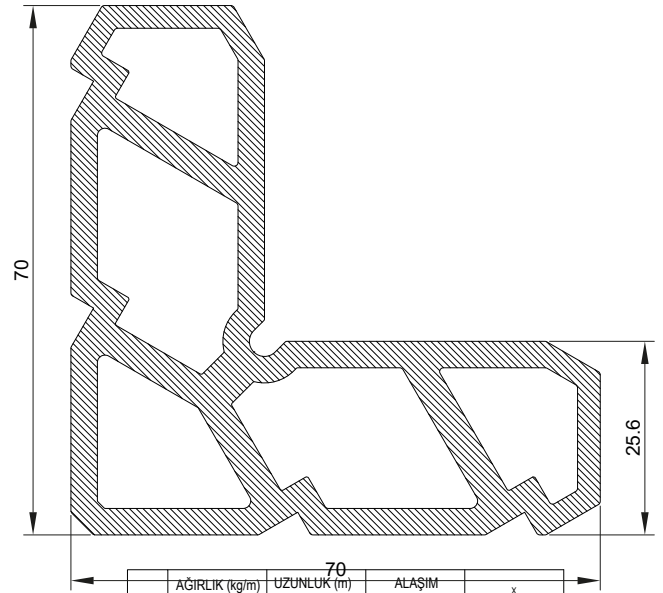


Z77.LP.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	3,322	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	52,519	52,519	11,394	11,394

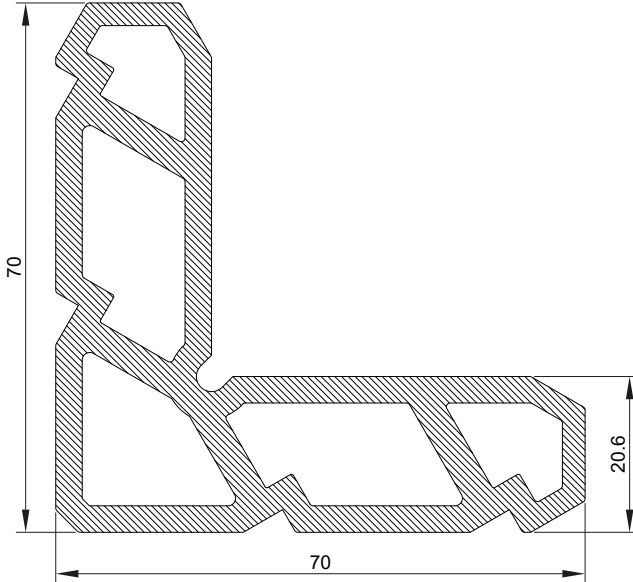


Z77.LP.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	3,090	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	49,206	49,206	10,935	10,935

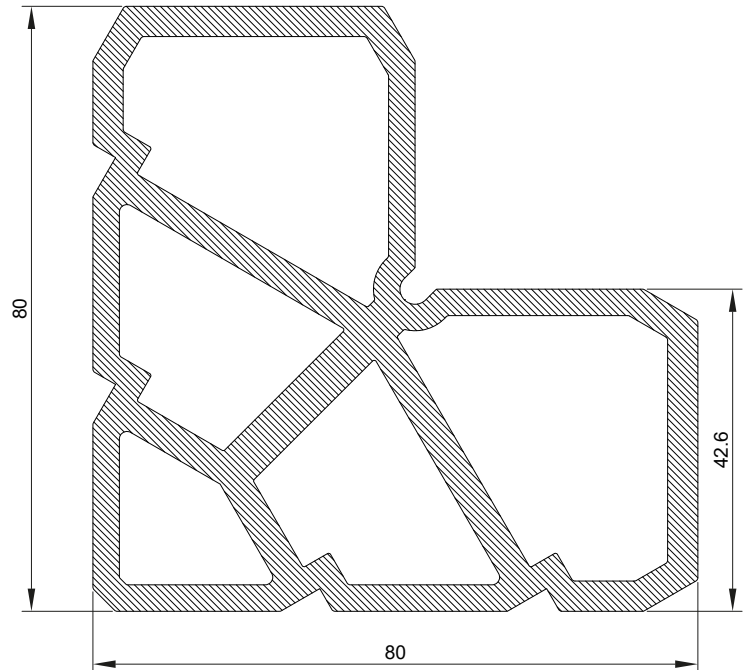


Z77.LP.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	4,570	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	97,115	97,115	20,704	20,704

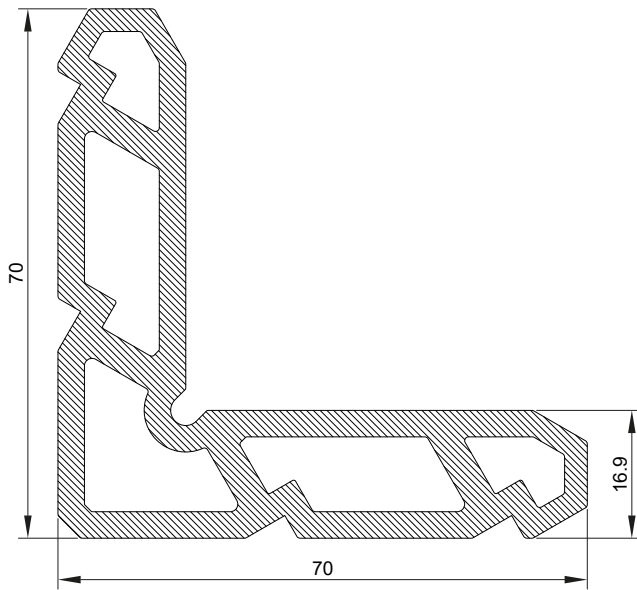


Z77.LP.07	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,951	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	
	46,766	46,766	10,110	

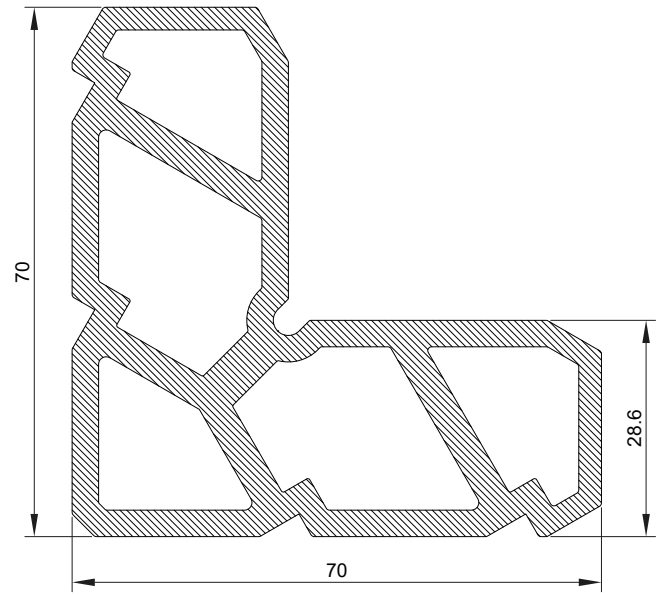


Z77.LP.08	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	3,451	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	
	54,439	54,439	12,713	

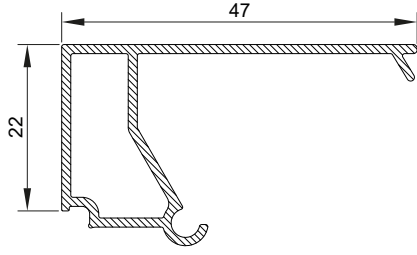


Z77.G.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,378	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	2,521	1,230	0,789	0,713

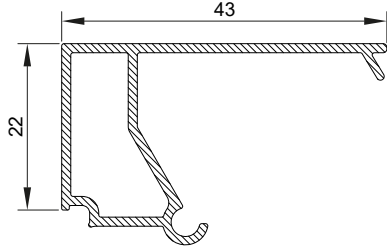


Z77.G.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,365	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,980	1,192	0,680	0,704

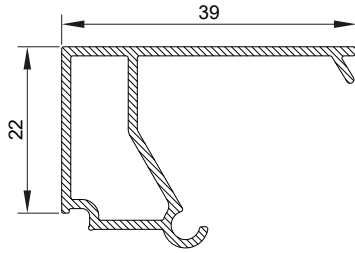


Z77.G.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,352	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,528	1,151	0,582	0,693




Z77.G.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,339	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,158	1,107	0,497	0,681




Z77.G.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,326	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,865	1,059	0,426	0,668




Z77.G.06	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,313	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,641	1,008	0,373	0,653




Z77.G.07	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,300	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,480	0,952	0,343	0,635





Z77.G.08	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,288	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,372	0,891	0,338	0,615




Z77.G.09	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,275	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,310	0,825	0,268	0,591



Z77.G.10	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,270	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,270	0,762	0,202	0,566

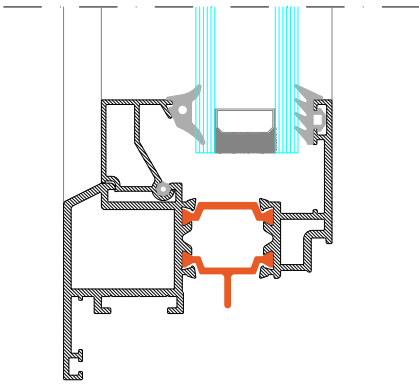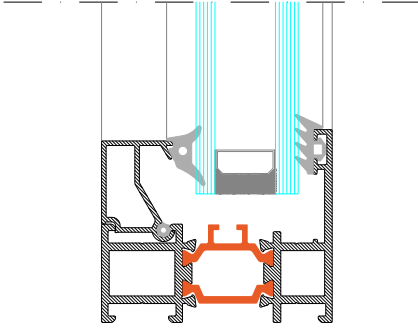


				
	FTL.01.01	FTL.01.02	FTL.01.03	FTL.01.04
Z77.G.02	----	----	4 mm	5 mm
Z77.G.03	6 mm	7 mm	8 mm	9 mm
Z77.G.04	10 mm	11 mm	12 mm	13 mm
Z77.G.05	14 mm	15 mm	16 mm	17 mm
Z77.G.06	18 mm	19 mm	20 mm	21 mm
Z77.G.07	22 mm	23 mm	24 mm	25 mm
Z77.G.08	26 mm	27 mm	28 mm	29 mm
Z77.G.09	30 mm	31 mm	32 mm	33 mm
Z77.G.10	34 mm	35 mm	36 mm	37 mm

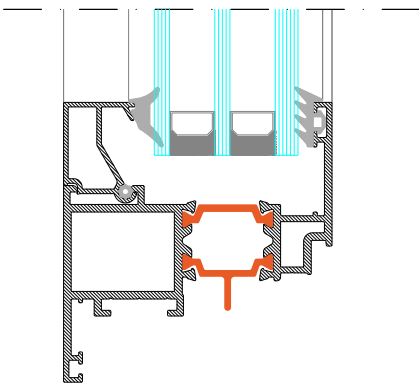


				
	FTL.01.01	FTL.01.02	FTL.01.03	FTL.01.04
Z77.G.01	8 mm	9 mm	10 mm	11 mm
Z77.G.02	12 mm	13 mm	14 mm	15 mm
Z77.G.03	16 mm	17 mm	18 mm	19 mm
Z77.G.04	20 mm	21 mm	22 mm	23 mm
Z77.G.05	24 mm	25 mm	26 mm	27 mm
Z77.G.06	28 mm	29 mm	30 mm	31 mm
Z77.G.07	32 mm	33 mm	34 mm	35 mm
Z77.G.08	36 mm	37 mm	38 mm	39 mm
Z77.G.09	40 mm	41 mm	42 mm	43 mm
Z77.G.10	44 mm	45 mm	46 mm	47 mm


FTL.01.01

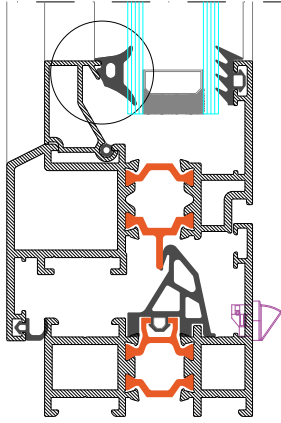İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
81 gr/m**Paket / Package:**
185 m / 15 kg


FTL.01.06

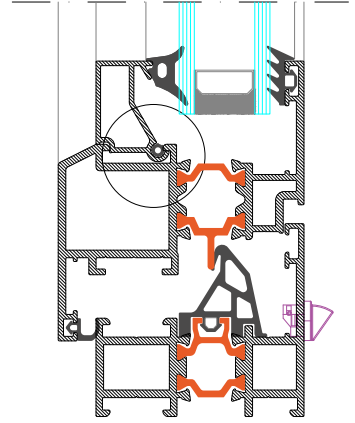SIZDIRMAZLIK FİTİLİ
SEALING GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
10 gr/m**Paket / Package:**
1500 m / 15 kg


FTL.01.02

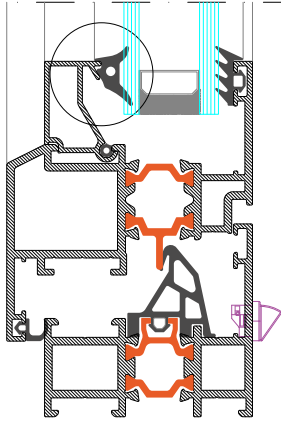İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
75 gr/m**Paket / Package:**
200 m / 15 kg


FTL.01.07

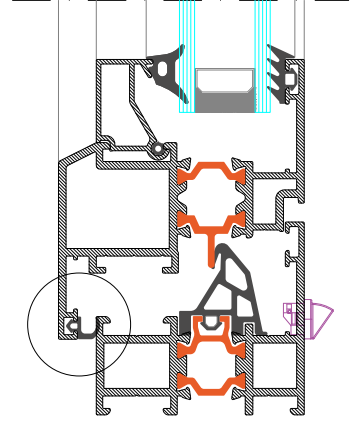İÇ BİNİ FİTİLİ
INTERNAL REBATE GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
28 gr/m**Paket / Package:**
535 m / 15 kg


FTL.01.03

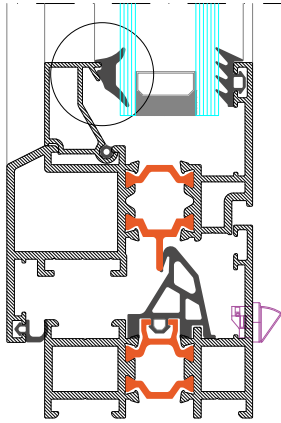İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
69 gr/m**Paket / Package:**
217 m / 15 kg


FTL.01.08

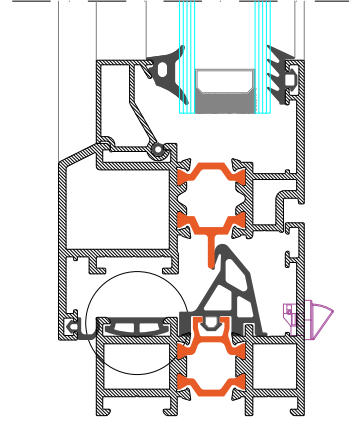KANAL KAPAMA FİTİLİ
SEALING GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
71 gr/m**Paket / Package:**
211 m / 15 kg


FTL.01.04

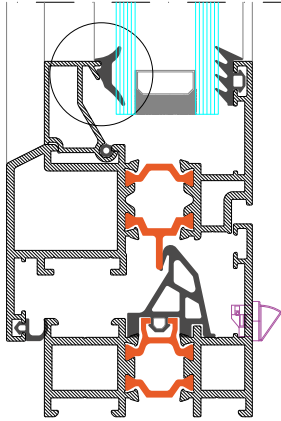İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
55 gr/m**Paket / Package:**
272 m / 15 kg


FTL.01.27

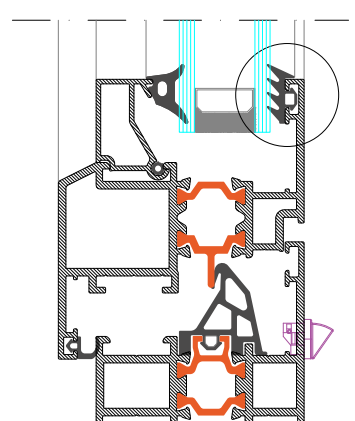DİŞ CAM FİTİLİ
GLAZING GASKET (OUTSIDE)**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
72 gr/m**Paket / Package:**
208 m / 15 kg


FTL.01.43

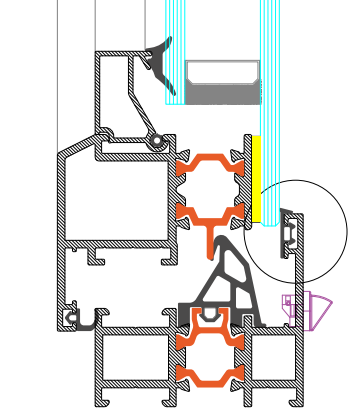**BİNİ FİTİLİ**
SEALING GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
30gr/m**Paket / Package:**
500 m / 15 kg

FTL.01.50

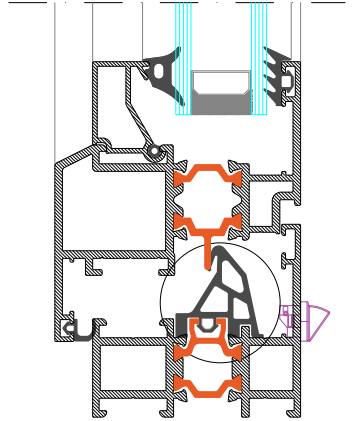
**TOZLUK FİTİLİ**
CENTRAL GASKET**Malzeme / Material :**
EPDM**Ağırlık / Weight :**
203 gr/m**Paket / Package:**
74 m / 15 kg

CC-024



KÖŞE ÇAVUŞU
SERGEANT CORNER

Malzeme / Material :
Paslanmaz Çelik / Stainless Steel

Paket / Package:
100 adet / 100 pieces

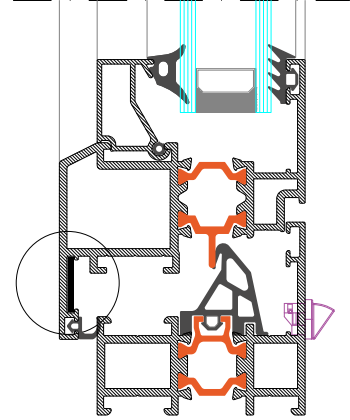

TK.01.01



TAHLİYE KAPAĞI
DRAINAGE COVER CAP

Malzeme / Material : PVC
Paket / Package: 100 adet/ 100 pieces


TAHLİYE KAPAĞI
DRAINAGE COVER CAP

Malzeme / Material :
PVC

Paket / Package:
100 adet / 100 pieces

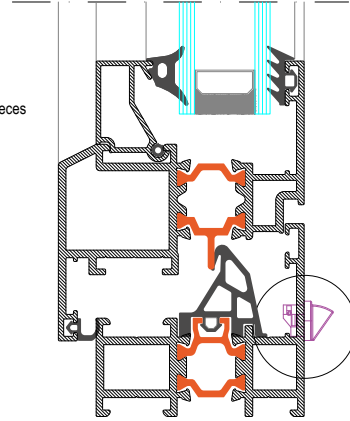

116 ZJ 01

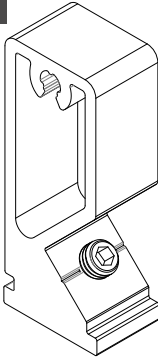

ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 11,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z91.M.01

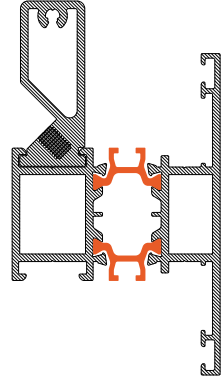

116 ZJ 02



ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION

Malzeme / Material : Alüminyum / Aluminium


Kesim Ölçüsü / Cutting Size : 11,6 mm

Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles: Z91.M.01

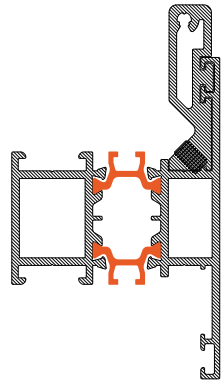


206 ZJ01

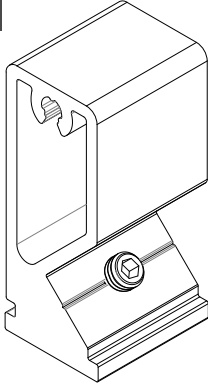

ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION
Malzeme / Material : Alüminyum / Aluminium

Kesim Ölçüsü / Cutting Size : 20,6 mm

Paket / Package: 100 Adet / 100 Pieces

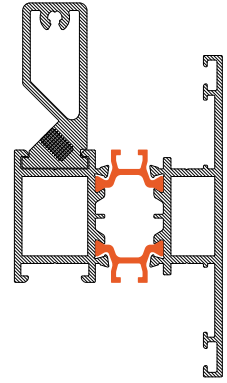
Profiller / Profiles: Z91.M.02


206 ZJ 02

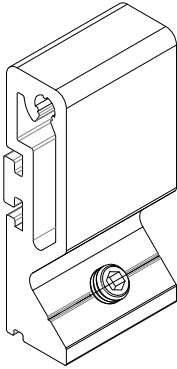

ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION
Malzeme / Material : Alüminyum / Aluminium

Kesim Ölçüsü / Cutting Size : 20,6 mm

Paket / Package: 100 Adet / 100 Pieces

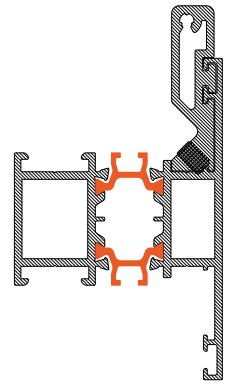
Profiller / Profiles: Z91.M.02


256 ZJ 01

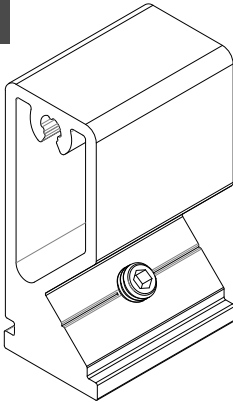

ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION
Malzeme / Material : Alüminyum / Aluminium

Kesim Ölçüsü / Cutting Size : 25,6 mm

Paket / Package: 100 Adet / 100 Pieces

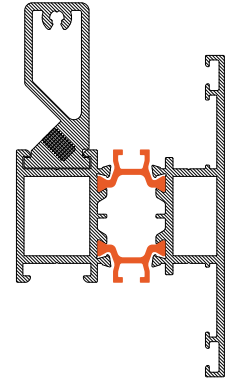
Profiller / Profiles: Z91.M.04


256 ZJ 02

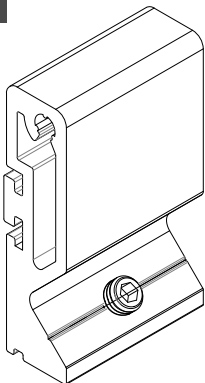

ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION
Malzeme / Material : Alüminyum / Aluminium

Kesim Ölçüsü / Cutting Size : 25,6 mm

Paket / Package: 100 Adet / 100 Pieces

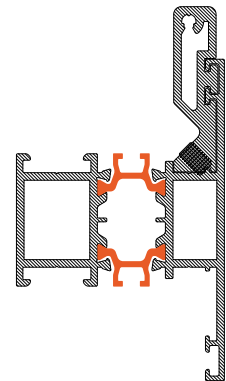Profiller / Profiles: Z91.M.04


ADP.02.15

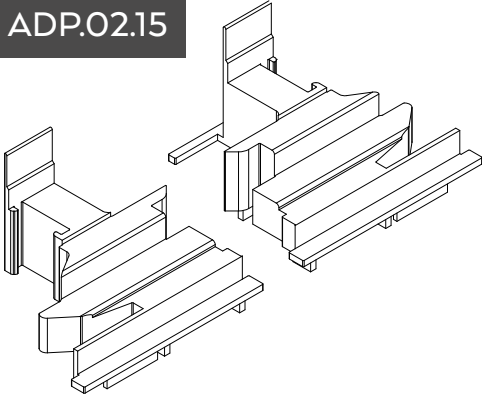

ADAPTÖR KAPAĞI
ADAPTER CAP

Malzeme / Material : PVC

