




E-74



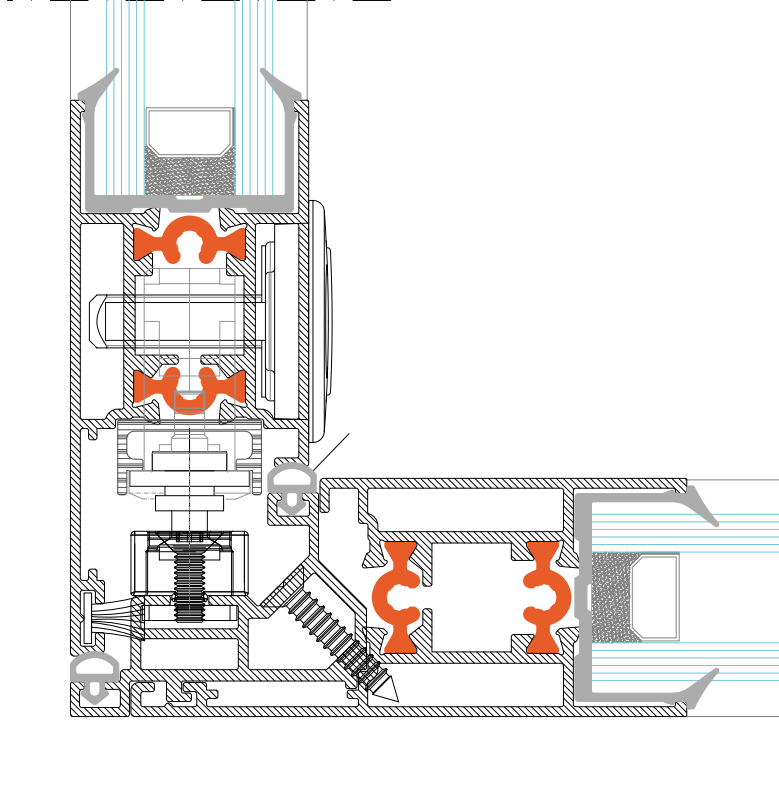

KASA DERİNLİĞİ / FRAME DEPTH

73,8mm - 116,3mm - 87,4 mm

KANAT DERİNLİĞİ / VENT DEPTH

31,5 mm

PROFİL ET KALINLIĞI / PROFILE WALL THICKNESS

1,3 mm

CAM KALINLIĞI / GLASS THICKNESS


22 mm

POLİAMİD BARIYER UZUNLUĞU / POLYAMIDE STRIP LENGHT


14,8 mm

ISI YALITIM DEĞERİ (Uf) / THERMAL INSULATION VALUE (Uf)

-4,10 W/m².K


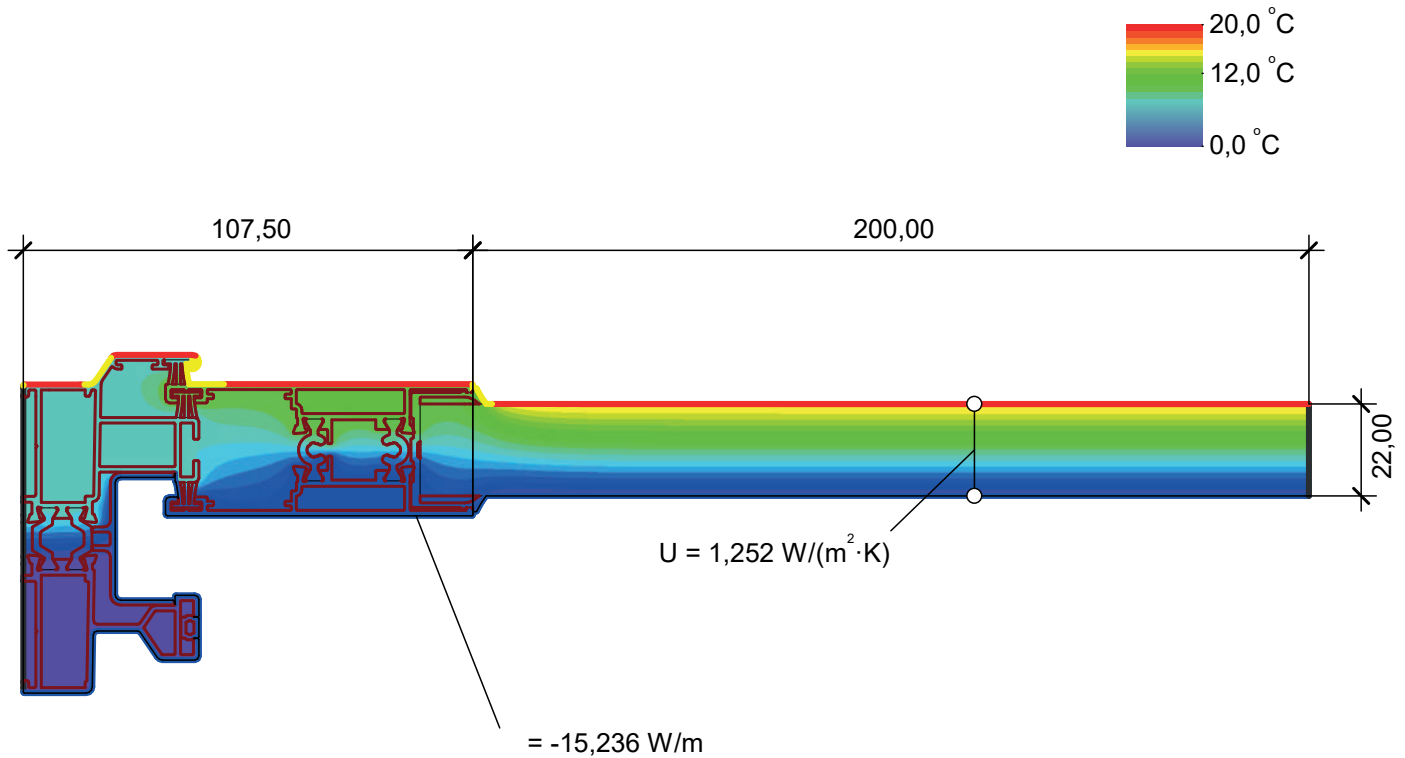


$$U_f = \frac{\frac{15,236}{20,0} - 1,252 \cdot 0,2}{0,108} = 4,76 \text{ W/(m}^2 \cdot \text{K)}$$




Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	[°C]	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000		0,040
PVC-U (polyvinylchloride), rigid	0,170	Interior, frame, normal	20,000		0,130
Panel	0,035	Interior, frame, reduced	20,000		0,200
Polyamid 6.6 with 25% glass fibre	0,300	Symmetry/Model section	0,000		
Unventilated air cavity *					

* EN ISO 10077-2:2017, 6.4.3/anisotrop

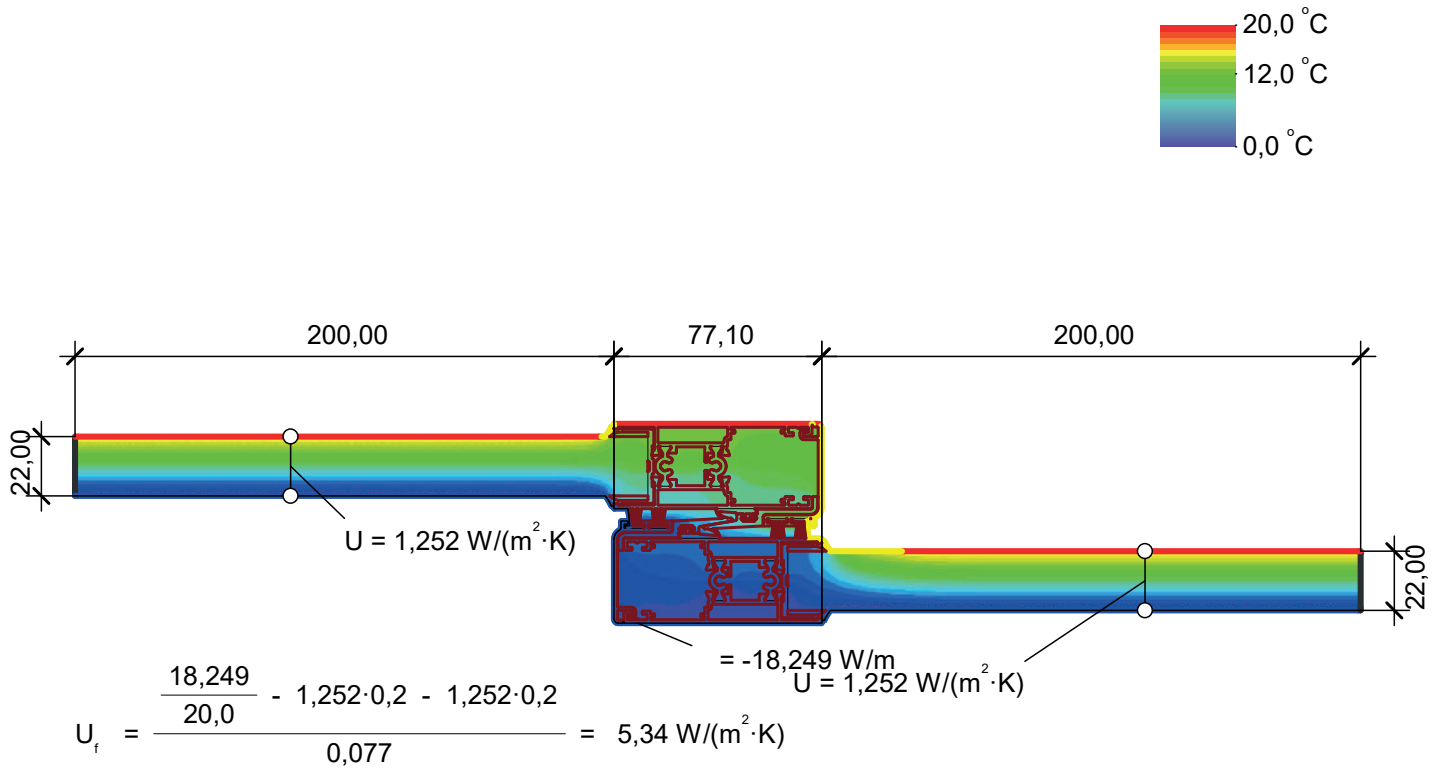

Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	[°C]	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000	0,040	
PVC-U (polyvinylchloride), rigid	0,170	Interior, frame, normal	20,000	0,130	
Panel	0,035	Interior, frame, reduced	20,000	0,200	
Polyamid 6.6 with 25% glass fibre	0,300	Symmetry/Model section	0,000		
Unventilated air cavity *					

* EN ISO 10077-2:2017, 6.4.3/anisotrop


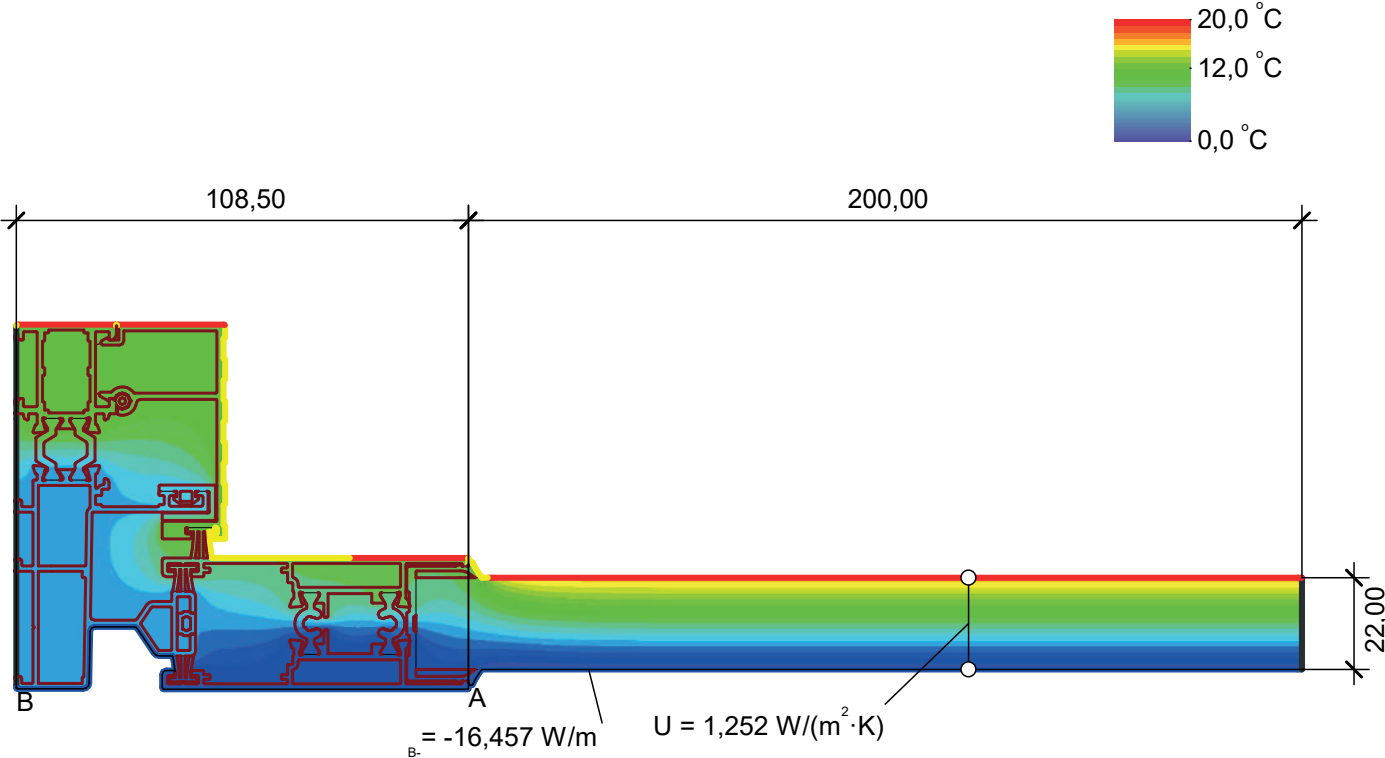


$$U_{f,A,B} = \frac{\frac{16,457}{20,0} - 1,252 \cdot 0,2}{0,109} = 5,28 \text{ W/(m}^2 \cdot \text{K)}$$




Material	[W/(m·K)]	Boundary Condition	q[W/m ²]	°C	R[(m ² ·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000	0,040	
Panel	0,035	Interior, frame, normal	20,000	0,130	
Polyamid 6.6 with 25% glass fibre	0,300	Interior, frame, reduced	20,000	0,200	
Unventilated air cavity *		Symmetry/Model section	0,000		

* EN ISO 10077-2:2017, 6.4.3/anisotrop

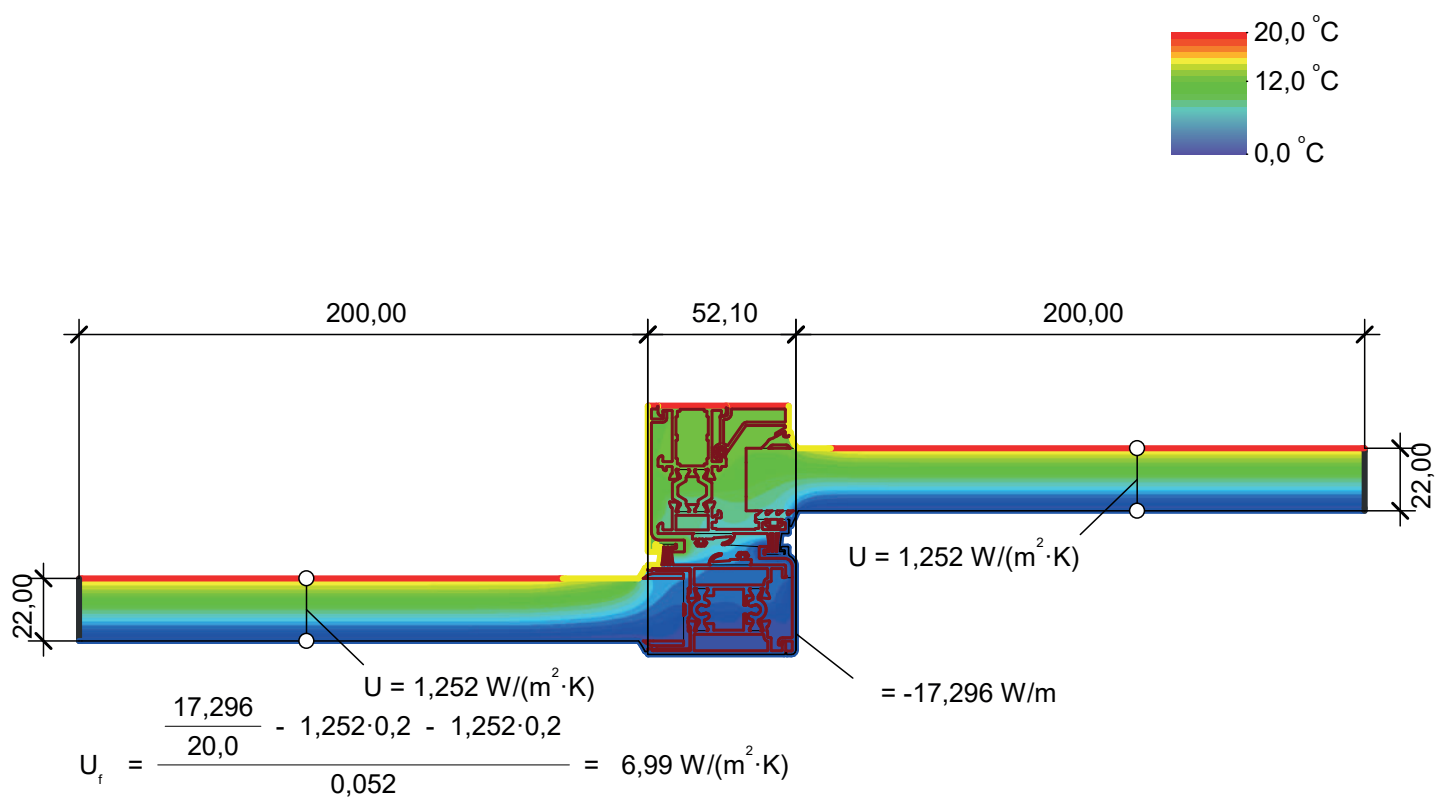


Material	[W/(m·K)]	Boundary Condition	q[W/m²]	[°C]	R[(m²·K)/W]
Aluminium (Si Alloys)	160,000	Epsilon 0.9			0,900
EPDM (ethylene propylene diene monomer)	0,250	Exterior, normal (1)	0,000	0,040	
PVC-U (polyvinylchloride), rigid	0,170	Interior, frame, normal	20,000	0,130	
Panel	0,035	Interior, frame, reduced	20,000	0,200	
Polyamid 6.6 with 25% glass fibre	0,300	Symmetry/Model section	0,000		
Unventilated air cavity *					


* EN ISO 10077-2:2017, 6.4.3/anisotrop

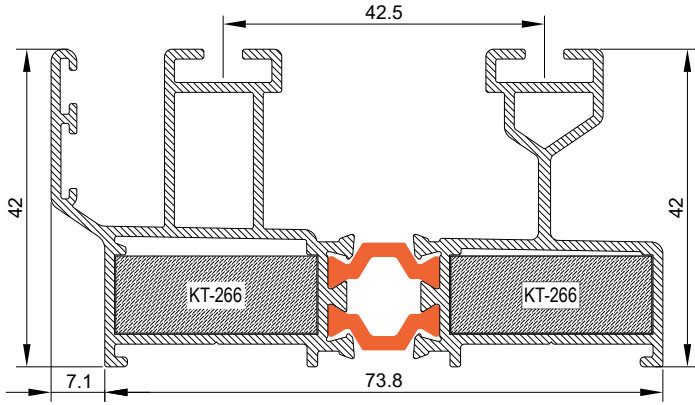


Z74.F.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,482	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	31,107	8,606	7,560	3,810

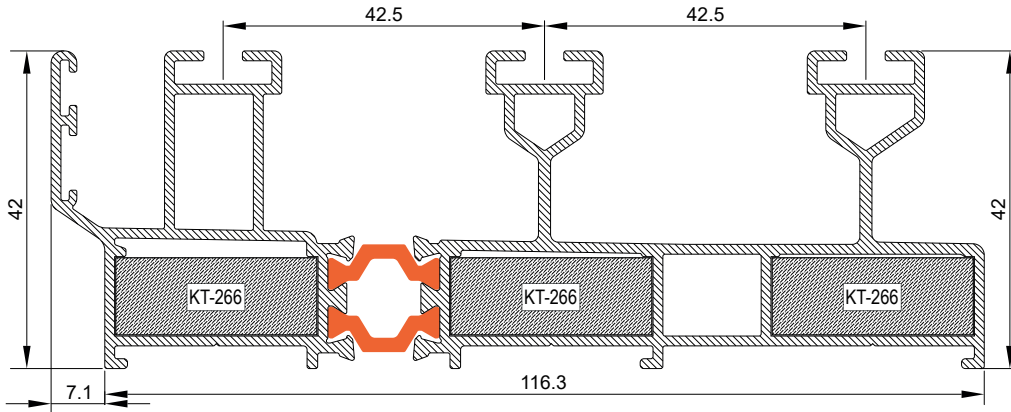


Z74.F.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	2,119	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	104,252	12,558	16,629	5,467

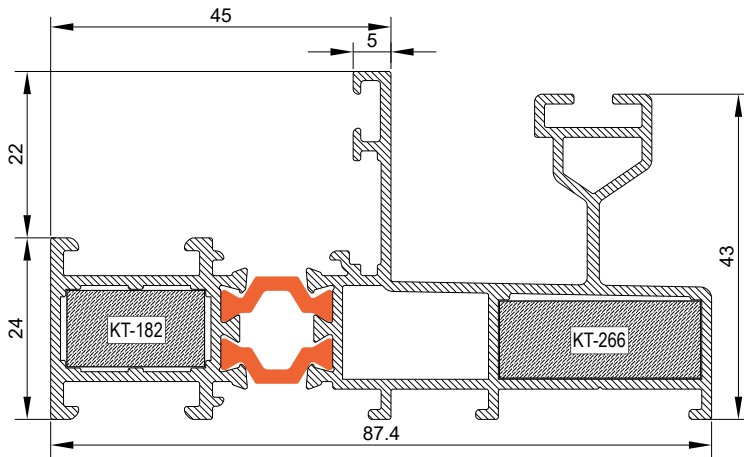


Z74.F.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,546	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	36,215	7,959	8,010	2,764

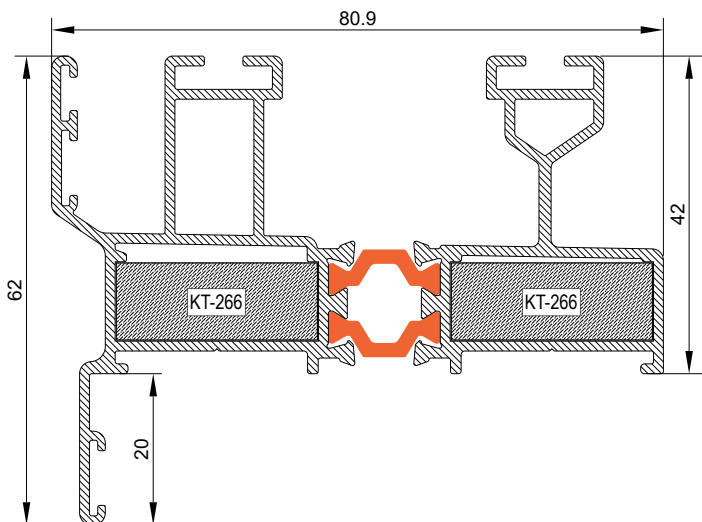


Z74.F.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,585	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	35,408	11,606	8,126	3,100

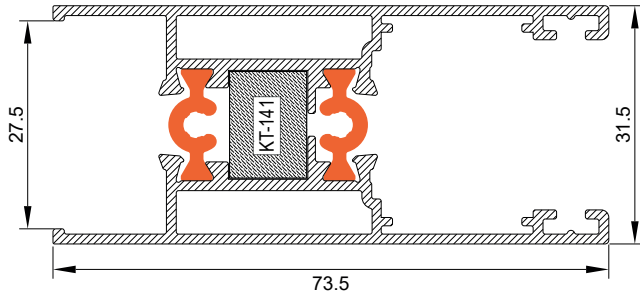


Z74.V.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,194	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	14,253	6,007	3,761	3,814

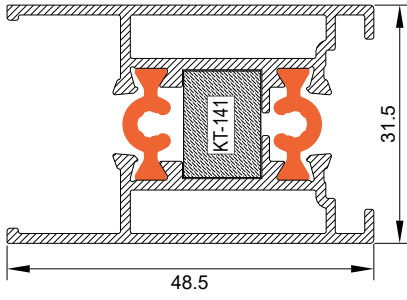


Z74.V.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,952	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	4,416	4,135	1,614	2,625

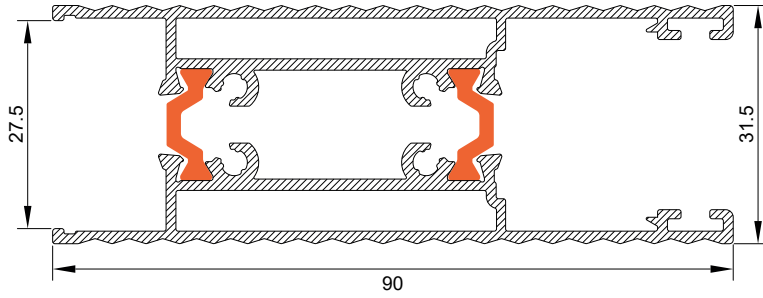


Z74.V.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,505	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	27,700	7,125	5,885	4,524

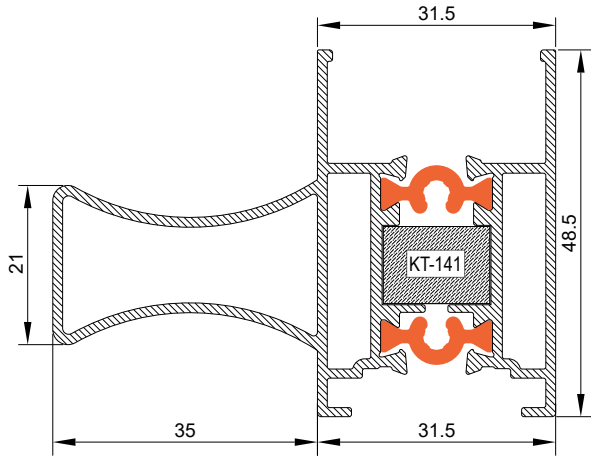

Z74.V.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,271	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	16,926	5,321	4,169	1,923

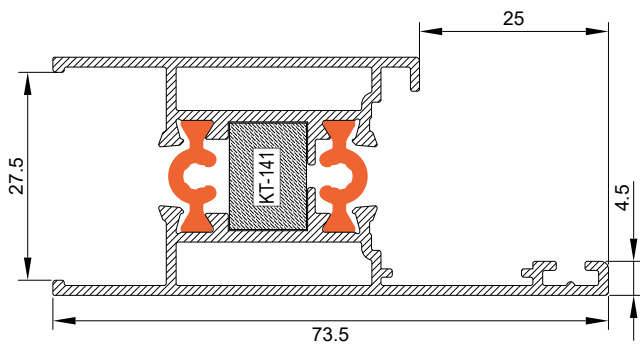


Z74.V.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,073	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	10,068	4,952	2,427	2,815

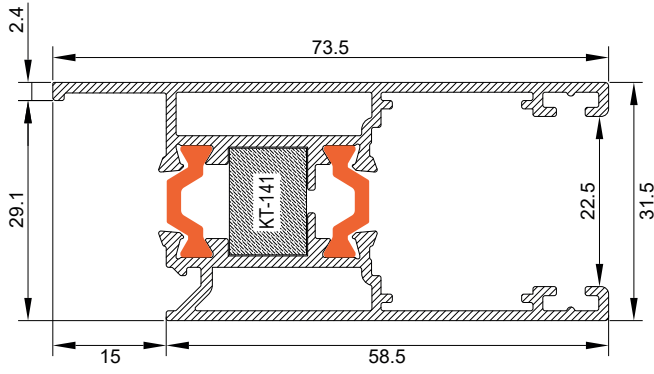


Z74.V.06	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,132	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	12,692	5,612	3,441	3,400

ORTA KAYIT PROFİLİ / MULLION PROFILE

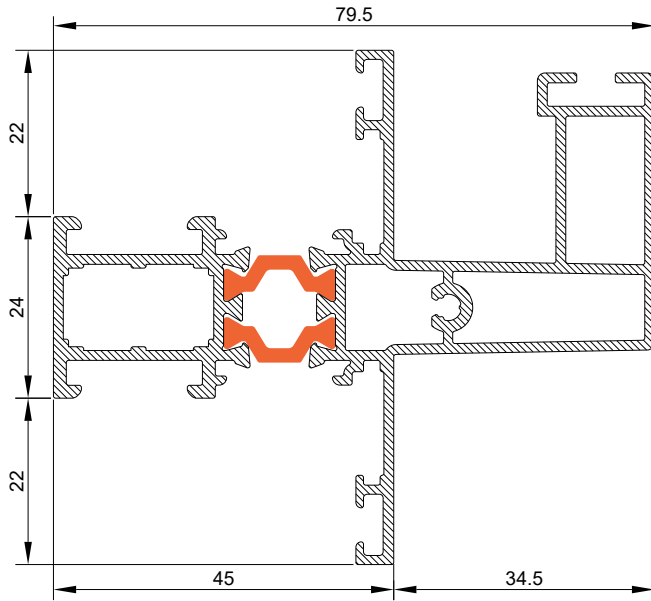


Z74.M.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,606	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	30,772	11,106	7,212	2,961


SİNEKLİK PROFİLLERİ / FLYING SCREEN PROFILES

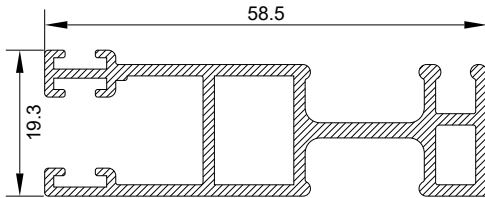

Z74.S.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,747	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	9,152	1,049	2,969	1,003




Z74.S.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,327	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,055	1,036	0,464	0,559




Z74.A.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,278	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,772	0,448	0,757	0,290

*Z74.V.01 İLE KULLANILIR.




Z74.A.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,217	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,320	0,118	0,607	0,123


*Z74.V.02 VE Z74.V.04 İLE KULLANILIR.

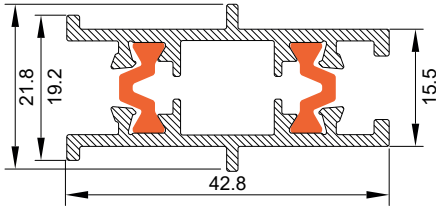


Z74.A.03	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,712	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	3,416	0,934	1,591	0,846

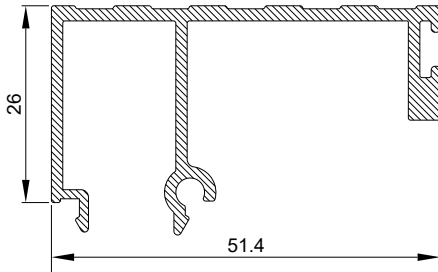


Z74.A.04	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,619	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	7,045	1,898	2,474	0,907

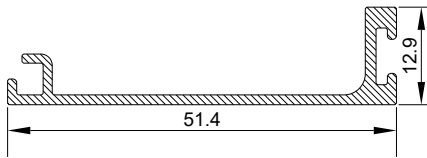


Z74.A.05	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,301	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	3,590	0,151	1,189	0,152

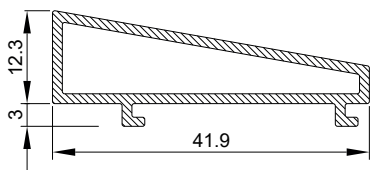

Z74.A.06	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,371	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	2,487	0,232	1,129	0,278




Z74.A.07	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,259	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	1,149	0,554	0,466	0,302




Z74.A.08	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,552	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	2,461	1,077	1,101	0,586


ÇITA PROFİLİ / GLAZING BEAD PROFILE




Z74.G.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,087	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,008	0,109	0,015	0,110

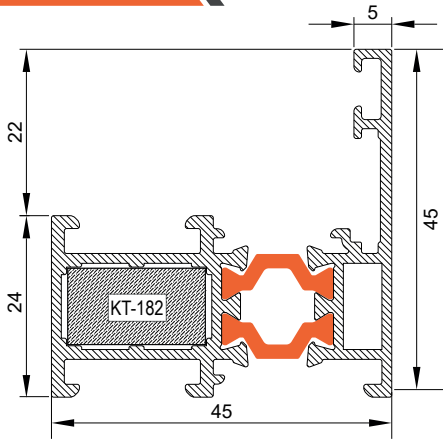


Z74.FW.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,938	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	7,699	3,718	2,966	1,229

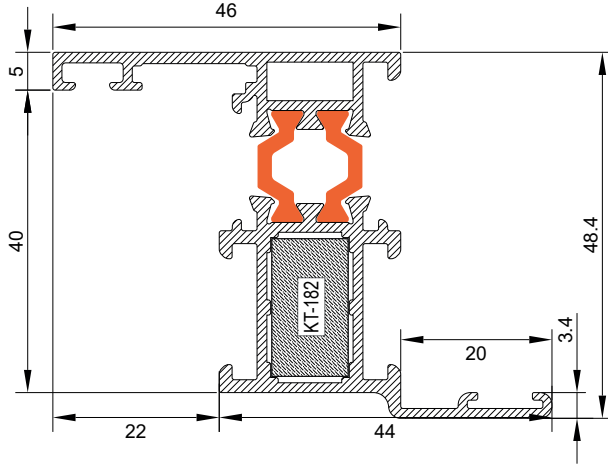


Z74.FW.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,046	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	5,945	10,411	1,800	3,976

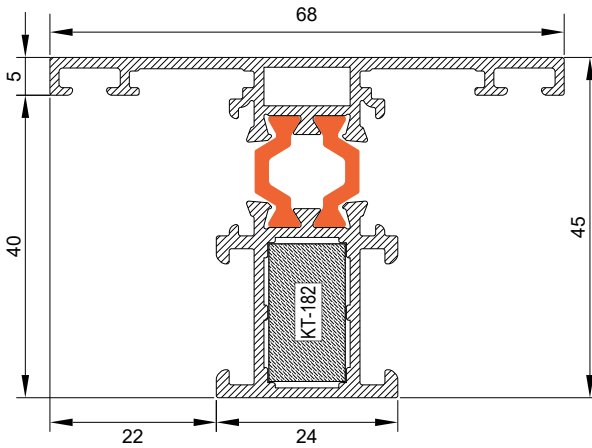

Z74.MW.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,074	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	7,073	8,961	2,080	3,161


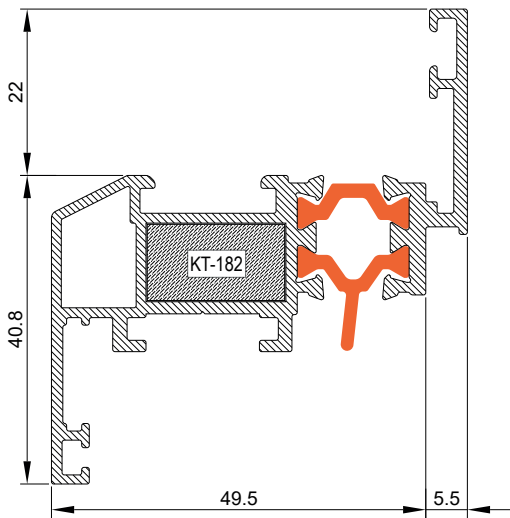


Z74.VW.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	1,154	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	14,092	6,079	5,122	1,905

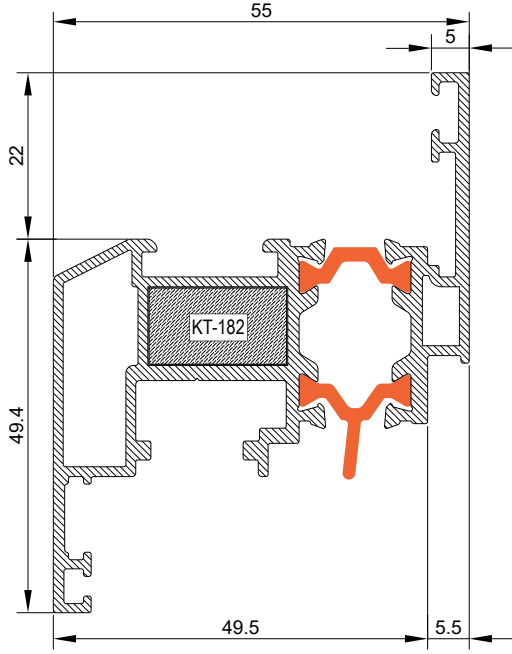


Z74.VW.02	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Lenght (m)	ALAŞIM Alloy	
	1,375	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	16,804	9,624	5,980	2,694

ADAPTÖR VE TİJ PROFİLLERİ / ADAPTER AND TIJ PROFILES

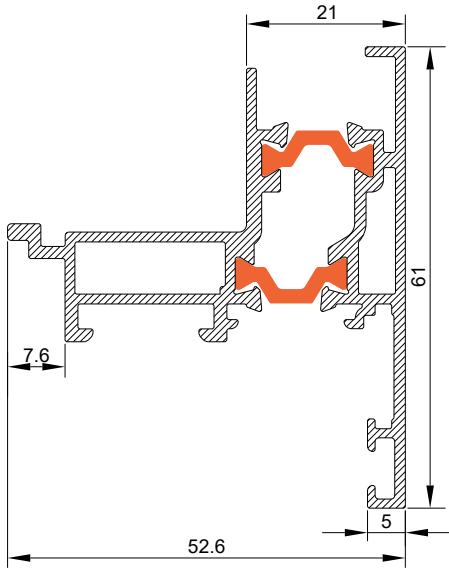


Z74.AP.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Lenght (m)	ALAŞIM Alloy	
	1,102	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	8,998	6,113	2,531	1,831


Z77.T.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Lenght (m)	ALAŞIM Alloy	
	0,104	6	EN AW6060 T6	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,144	0,005	0,136	0,016



Z77.G.10	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,270	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,256	0,762	0,202	0,566




Z77.G.11	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,199	6	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	0,234	0,601	0,169	0,401

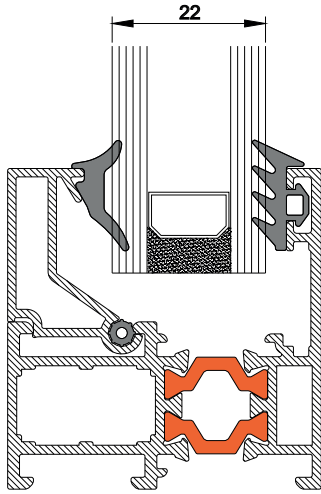


	FTL.01.01	FTL.01.02	FTL.01.03	FTL.01.04
Z77.G.10	19 mm	20 mm	21 mm	22 mm
Z77.G.11	23 mm	24 mm	25 mm	26 mm


ORTA KAYIT BAĞLANTI PROFİLİ / T-JOINT PROFİL

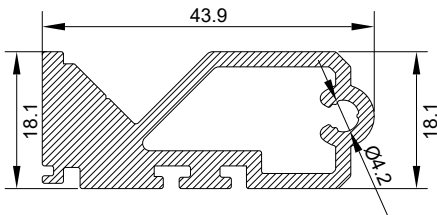


Z77.JP.01	AĞIRLIK (kg/m) Weight (kg/m)	UZUNLUK (m) Length (m)	ALAŞIM Alloy	
	0,983	7	EN AW 6060 T66	
	Jx (cm ⁴)	Jy (cm ⁴)	Wx (cm ⁴)	Wy (cm ⁴)
	6,686	1,070	2,546	1,047

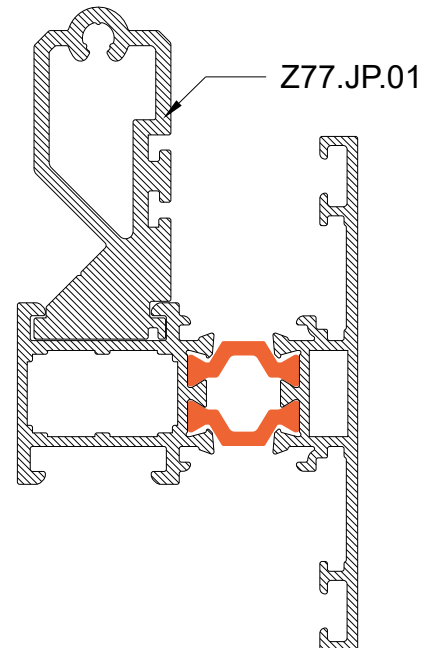


FTL.01.01

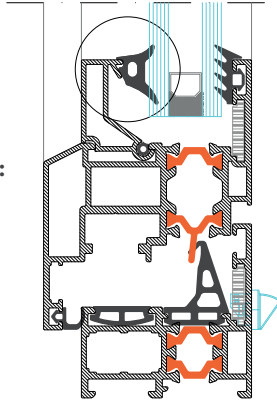İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
81 gr/m**Paket / Package:**
185 m / 15 kg


FTL.01.06

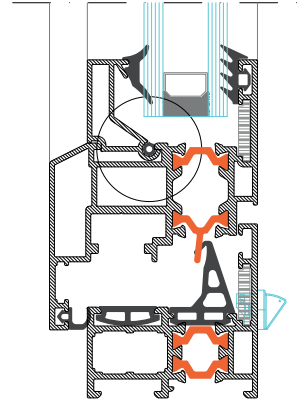SIZDIRMAZLIK FİTİLİ
SEALING GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
10 gr/m**Paket / Package:**
1500 m / 15 kg


FTL.01.02

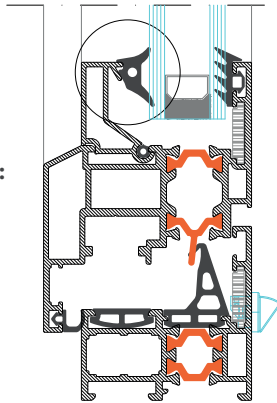İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
75 gr/m**Paket / Package:**
200 m / 15 kg


FTL.01.07

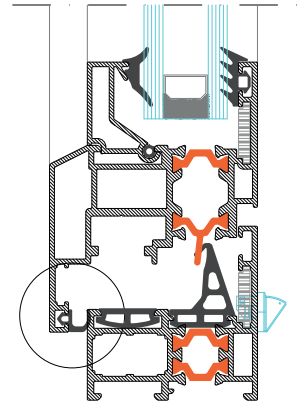İÇ BİNİ FİTİLİ
INTERNAL REBATE GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
28 gr/m**Paket / Package:**
536 m / 15 kg


FTL.01.03

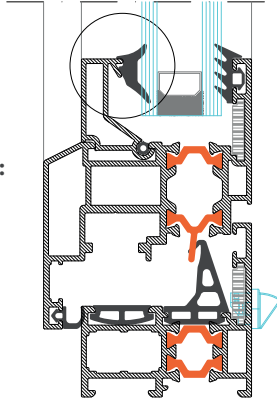İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
69 gr/m**Paket / Package:**
217 m / 15 kg


FTL.01.08

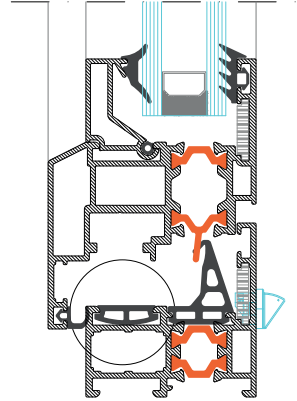KANAL KAPAMA FİTİLİ
SEALING GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
71 gr/m**Paket / Package:**
211 m / 15 kg


FTL.01.04

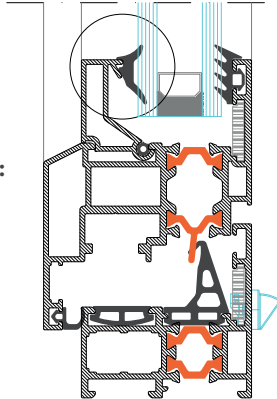İÇ CAM FİTİLİ
GLAZING GASKET (INSIDE)**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
55 gr/m**Paket / Package:**
272 m / 15 kg


FTL.01.13

RAY FİTİLİ
RAIL GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
22 gr/m**Paket / Package:**
681 m / 15 kg


FTL.01.24

KANAL FİTİLİ
CHANNEL GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
49 gr/m**Paket / Package:**
306 m / 15 kg


FTL.01.30

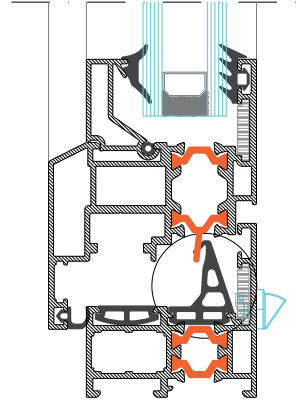SIZDIRMAZLIK FİTİLİ
SEALING GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
161 gr/m**Paket / Package:**
93 m / 15 kg


FTL.01.27

DIŞ CAM FİTİLİ
GLAZING GASKET (OUTSIDE)**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
72 gr/m**Paket / Package:**
208 m / 15 kg


FTL.01.31

İÇ BİNİ FİTİLİ
INTERNAL REBATE GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
77 gr/m**Paket / Package:**
195 m / 15 kg


FTL.01.28

KENET FİTİLİ
INTERSECTION GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
43 gr/m**Paket / Package:**
349 m / 15 kg


FTL.01.32

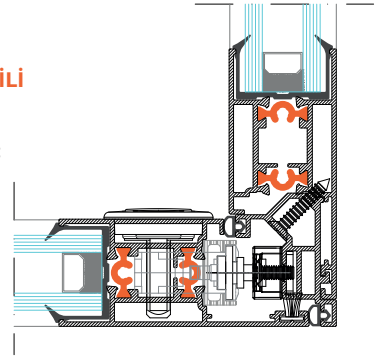KANAL KAPAMA FİTİLİ
SEALING GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
24 gr/m**Paket / Package:**
625 m / 15 kg


FTL.01.29

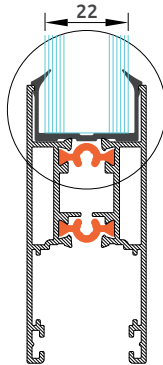CAM FİTİLİ
GLAZING GASKET**Malzeme / Mater al:**
EPDM**Ağırlık / We ght:**
128 gr/m**Paket / Package:**
117 m / 15 kg

FTL.01.32


CAM FİTİLİ
GLAZING GASKET**Malzeme / Material:**
EPDM**Ağırlık / Weight:**
22 gr/m**Paket / Package:**
681 m / 15 kg

PVC.01.01

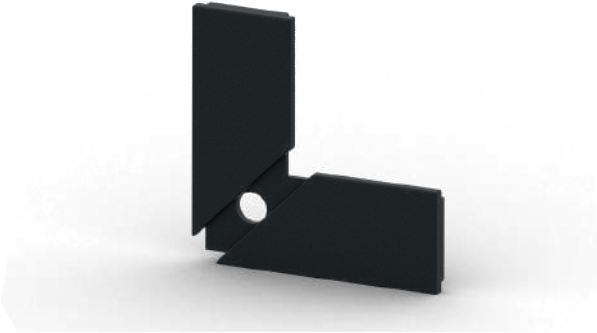


KÖŞE ÇAVUŞU
CORNER JOINT

Malzeme / Material :PVC

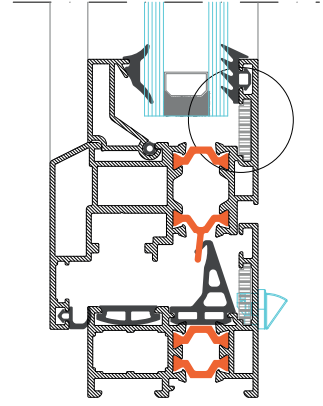


PVC.01.02

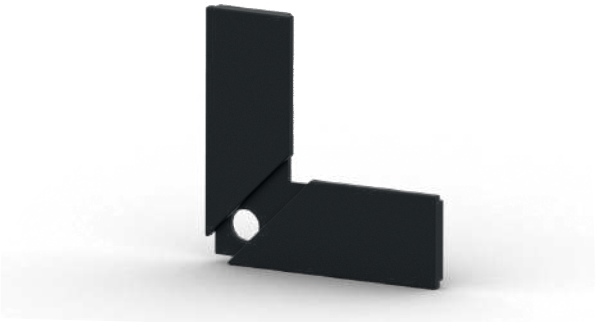


KÖŞE ÇAVUŞU
CORNER JOINT

Malzeme / Material :PVC

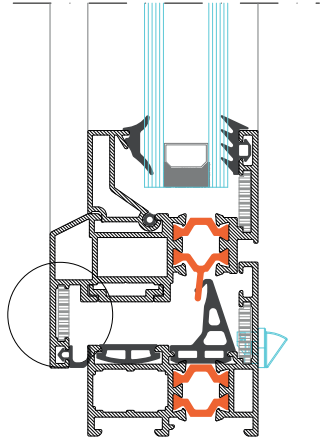


PVC.01.05

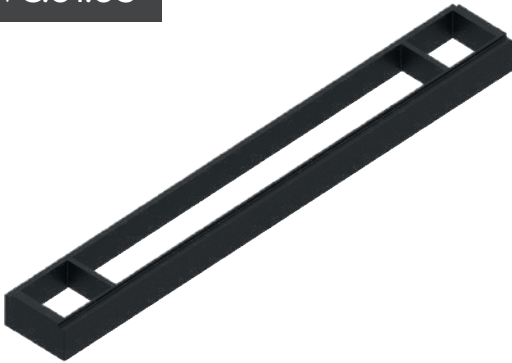

GÖMME KİLİT YATAĞI (KLT-001 İÇİN)
MORTISE LOCK BED (FOR KLT-001)

Malzeme / Material :PVC




PVC.01.06



PVC KAPAK
PVC CAP

Malzeme / Material :PVC




Z74.V.04

PVC.01.07



PVC KAPAK (45 DERECE)
PVC CAP (45 ANGLE)

Malzeme / Material: PVC




Z74.V.04

PVC.01.08



PVC KAPAK
PVC CAP

Malzeme / Material: PVC

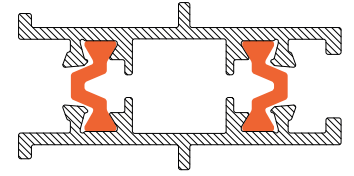

Z74.A.03


PVC.01.09



ORTA KAYIT PVC PARÇASI
PVC PART FOR MULLION

Malzeme / Material: PVC

Paket / Package: 50 adet / 50 pieces

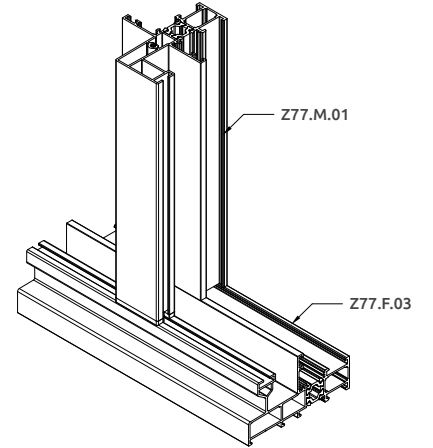

Z77.M.01

Z77.F.03


STP.01.01



STOPER
STOPPER

Malzeme / Material: PVC


Paket / Package: 50 adet / 50 pieces

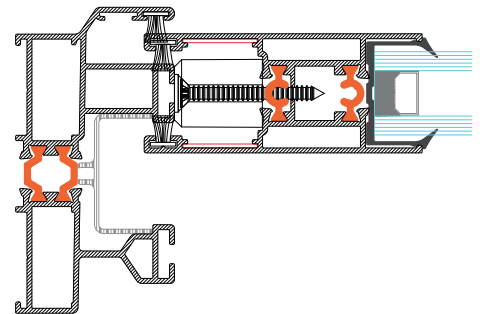

PVC.02.13


KENET PVC PROFİLİ
PVC PROFILE FOR INTERSECTION


Malzeme / Mater al :PVC
 Ağırlık / We ght :138 gr/m
 Paket / Package: 60 m
 Boy / Lenght: 6 m

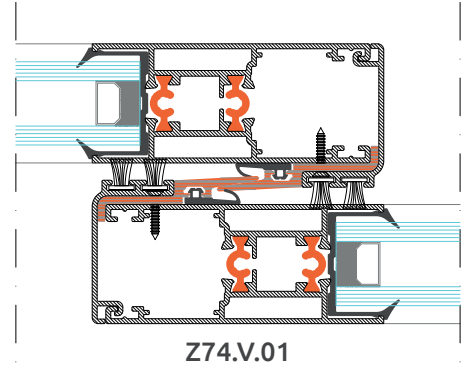

PVC.02.14


KENET PVC PROFİLİ
PVC PROFILE FOR INTERSECTION


Malzeme / Mater al :PVC
 Ağırlık / We ght :98 gr/m
 Paket / Package: 60 m
 Boy / Lenght: 6 m

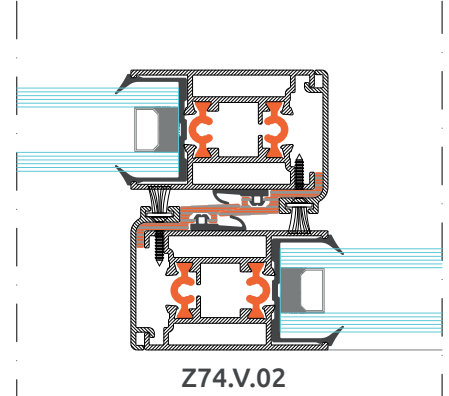

PVC.02.15


KASA PVC PROFİLİ
PVC PROFILE FOR FRAME


Malzeme / Mater al :PVC
 Ağırlık / We ght :102 gr/m
 Paket / Package: 60 m
 Boy / Lenght: 6 m




PVC.02.16


İSPANYOLET PVC PROFİLİ
PVC PROFILE FOR ESPAGNOLETTE

Malzeme / Mater al :PVC
 Ağırlık / We ght :73 gr/m
 Paket / Package: 60 m
 Boy / Lenght: 6 m




PL-018

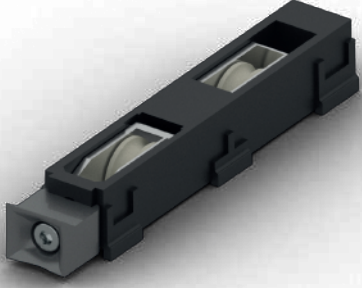

AYARLI ÇİFTLİ RULMAN
ADJUSTABLE PULLEY

Malzeme / Material: PVC / ZAMAK
Kapasite / Capacity: 45 kg

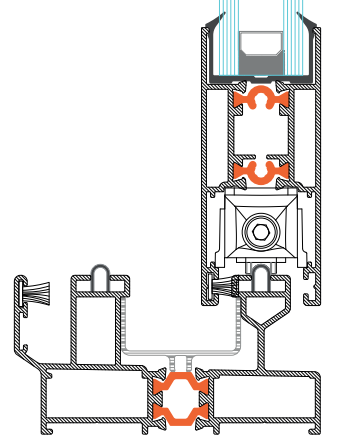


PL-027



RULMAN
PULLEY

Malzeme / Material: PVC / ZAMAK
Kapasite / Capacity: 5 kg

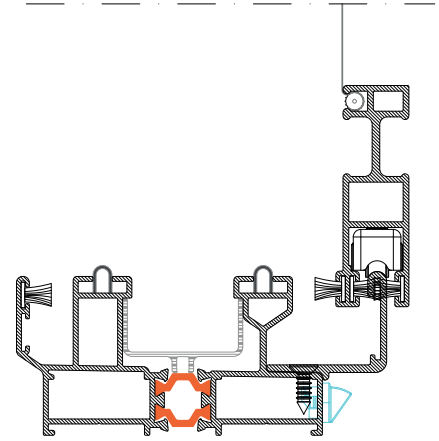


RL-001




PASLANMAZ ÇELİK RAY
STAINLESS STEEL RAIL

Malzeme / Material: Paslanmaz / Stainless Steel
Boy / Length: 6 m

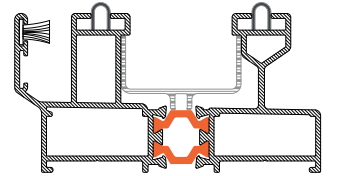

ENJ.01.02



KÖŞE ENJESİYON PARÇA SETİ (4'LÜ)
CORNER INJECTION PART SET (4 PIECE)


Malzeme / Material: TPV
Paket / Package: 20 SET

HN-002



"D" KOL
"D" HANDLE

Malzeme / Material :ZAMAK

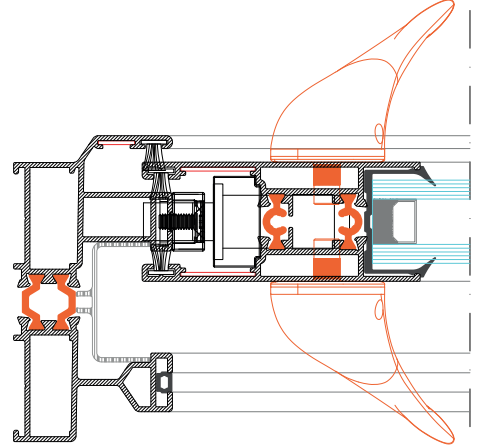


HN-008



GÖMME KOL
RECESSED HANDLE


Malzeme / Material :ZAMAK



HN-017




PENCERE KOLU
WINDOW HANDLE

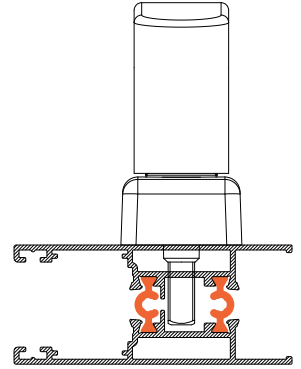

ESP-001




STANDART İSPANYOLET
STANDARD ESPAGNOLETTE



KRS-001




KARŞILIK
FOREND
Malzeme / Material: ZAMAK




KLT-001




KALE 201-F GÖMME KİLİT
KALE 201-F MORTISE LOCK



HKL-001

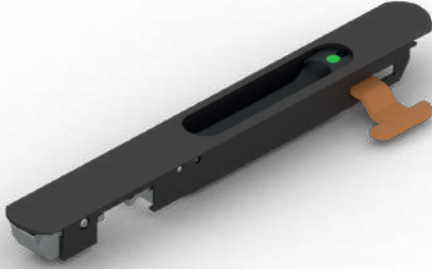

HAVUZ KİLİT
LOCK




KF.0800



KİL FİTİL
BRUSH PILE SEAL

Malzeme / Material: PP
Renk / Colour: Gr / Grey
Paket / Package: 1000 m




TK.01.01




TAHLİYE KAPAĞI
DRAINAGE COVER CAP

Malzeme / Material: PVC
Paket / Package: 100 adet / 100 pieces

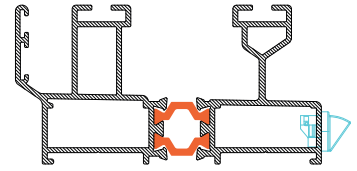


CC-002

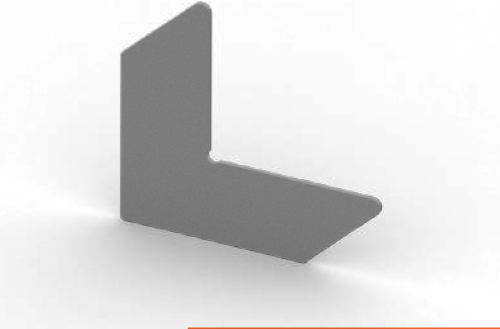


KÖŞE ÇAVUŞU
SERGEANT CORNER

Malzeme / Material: Paslanmaz Çelik / Stainless Steel
Paket / Package: 100 adet / 100 pieces




Z74.V.01




Z74.S.02

CC-027

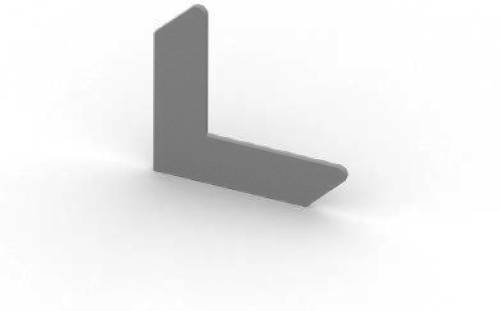


KÖŞE ÇAVUŞU
SERGEANT CORNER

Malzeme / Material: Paslanmaz Çelik / Stainless Steel
Paket / Package: 100 adet / 100 pieces




Z74.F.01

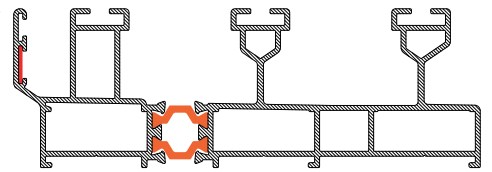

Z74.F.02


ADP.02.05

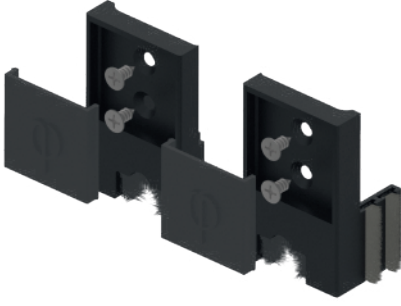


KENET RAY KAPAĞI
INTERSECTION CAP

Malzeme / Material: PVC
Paket / Package: 50 Set

Z74.A.01

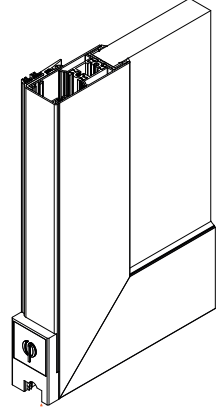


ADP.02.06

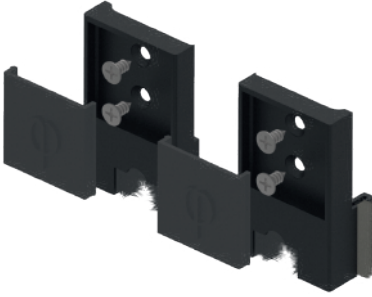


KENET RAY KAPAĞI
INTERSECTION CAP

Malzeme / Material: PVC
Paket / Package: 50 Set

Z74.A.02

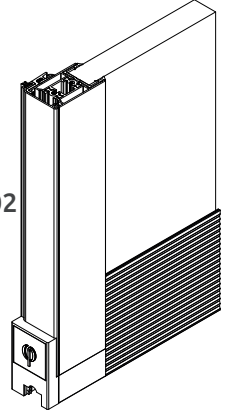


ADP.02.07

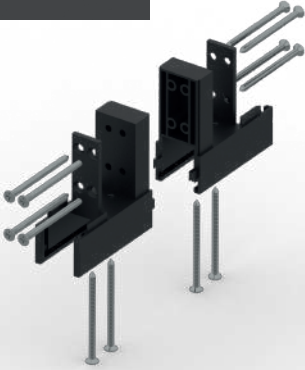

KÖŞE BAĞLANTI PARÇASI
CORNER CLEAT


Malzeme / Material: PVC
Paket / Package: 50 Set

Z74.V.01

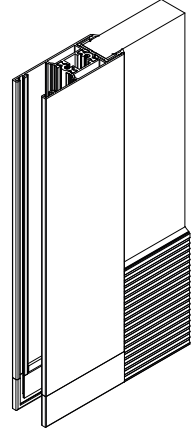

Z74.V.03


ADP.02.08



KÖŞE BAĞLANTI PARÇASI
CORNER CLEAT

Malzeme / Material: PVC
Paket / Package: 50 Set

Z74.V.02

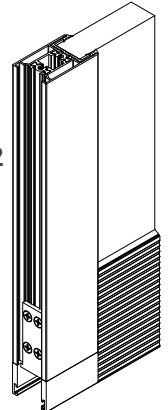


Z74.V.03

ADP.02.09



SIZDIRMAZLIK PARÇASI
SEALING PART

Malzeme / Material: PVC
Paket / Package: 50 adet / 50 pieces

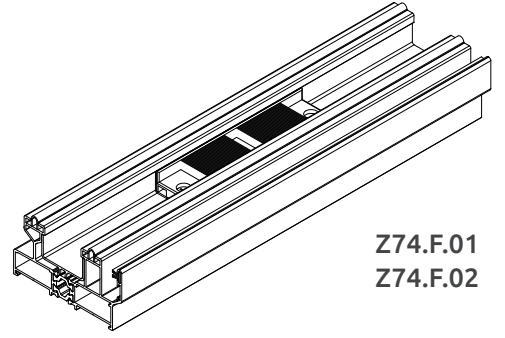


Z74.F.01
 Z74.F.02

ADP.02.10

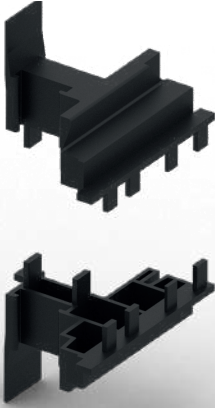

ADAPTÖR KAPAĞI
ADAPTER CAP

Malzeme / Material: PVC
Paket / Package: 50 SET / 50 sets

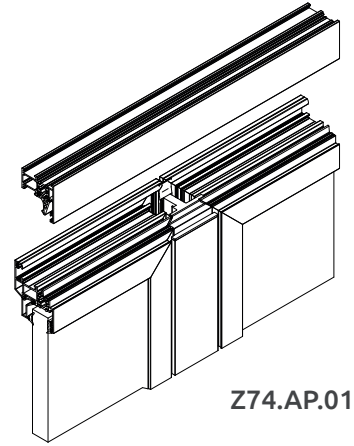


Z74.AP.01

100 JP 01

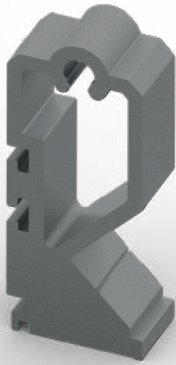
ORTA KAYIT BAĞLANTI
T-JOINT CONNECTION


Malzeme / Material: Alüminyum / Aluminum
Kesim Ölçüsü / Cutting Size: 17,8 mm
Ağırlık / Weight: 17,5 gr/adet
Paket / Package: 100 Adet / 100 Pieces

Profiller / Profiles:
 Z74.M.01, Z74.FW.01 ve Z74.MW.01




Z74.MW.01

KT-141

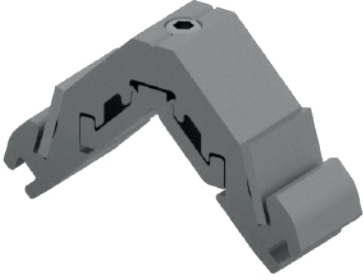
**KÖŞE TAKOZU**
CORNER CLEAT

Malzeme / Material: Alüminyum/Aluminum
Paket / Package: 100 adet/ 100 pieces

Profiller / Profiles:
Z74.V.01
Z74.S.01




KT-182

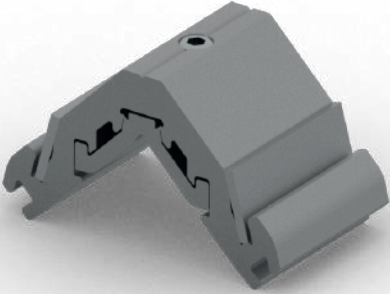
**KÖŞE TAKOZU**
CORNER CLEAT

Malzeme / Material: Alüminyum/Aluminum
Paket / Package: 100 adet/ 100 pieces

Profiller / Profiles:
Z74.F.03
Z74.FW.01
Z74.VW.01
Z74.VW.02

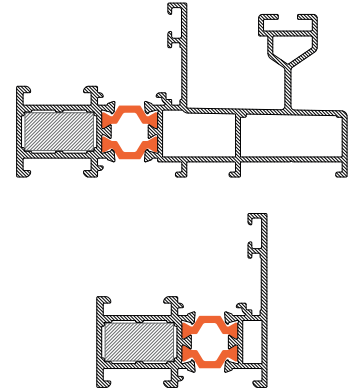


KT-266

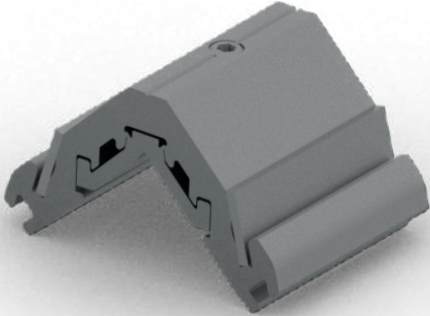**KÖŞE TAKOZU**
CORNER CLEAT


Malzeme / Material: Alüminyum/Aluminum
Paket / Package: 100 adet/ 100 pieces

Profiller / Profiles:
Z74.F.01
Z74.F.02
Z74.F.03

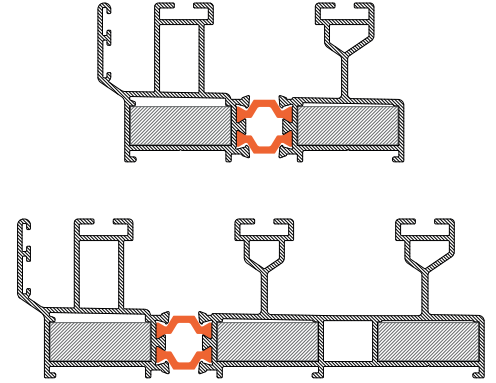


TEK AÇILIM AKSESUARLARI

Max.80 KG		KANAT GENİŞLİĞİ				
YÜKSEKLİK		355-700	701-1000	1001-1200	1201-1400	1401-1700
	500-1200	TA01.A	TA02.A	TA03.A	TA04.A	TA05.A
	1201-2400	TA01.B	TA02.B	TA03.B	TA04.B	TA05.B




ÇİFT AÇILIM AKSESUARLARI

Max.130 KG		KANAT GENİŞLİĞİ				
YÜKSEKLİK		355-700	701-1000	1001-1200	1201-1400	1401-1700
	500-1200	CA01.A	CA02.A	CA03.A	CA04.A	CA05.A
	1201-2400	CA01.B	CA02.B	CA03.B	CA04.B	CA05.B




ÇİFT KANAT ÇİFT AÇILIM AKS.

Max.80 KG		KANAT GENİŞLİĞİ				
YÜKSEKLİK		355-700	701-1000	1001-1200	1201-1400	1401-1700
	500-1200	CK01.A	CK02.A	CK03.A	CK04.A	CK05.A
	1201-2400	CK01.B	CK02.B	CK03.B	CK04.B	CK05.B





ÇİFT AÇILIM AKS. (9 AKS-PVC KANALLI)




UNIJET-C		KANAT GENİŞLİĞİ					
YÜKSEKLİK		280-500	501-750	751-1000	1001-1200	1201-1450	1451-1600
	480-590	PS01.A	PS02.A	PS03.A	PS04.A	PS05.A	PS06.A
	591-750	PS01.B	PS02.B	PS03.B	PS04.B	PS05.B	PS06.B
	751-1200	PS01.C	PS02.C	PS03.C	PS04.C	PS05.C	PS06.C
	951-1450	PS01.D	PS02.D	PS03.D	PS04.D	PS05.D	PS06.D
	1201-1700	PS01.E	PS02.E	PS03.E	PS04.E	PS05.E	PS06.E
	1451-1950	PS01.F	PS02.F	PS03.F	PS04.F	PS05.F	PS06.F
	1951-2450	PS01.G	PS02.G	PS03.G	PS04.G	PS05.G	







22 EKSEN, ZAMAK GÖVDELİ, SÜRME İSPANYOLETİ


KOD	KULLANIM ARALIĞI	A	B	C	D	E	F	VİDA TİPİ	VİDA ADET
ESP-002.A	H: 600 mm ~ 800 mm	600	-	-	175	175	106,5	3,9X25 YHB	8
ESP-002.B	H: 800 mm ~ 1000 mm	800	-	-	275	275	106,5	3,9X25 YHB	8
ESP-002.C	H: 1000 mm ~ 1200 mm	1000	94	-	375	375	131,5	3,9X25 YHB	10
ESP-002.D	H: 1200 mm ~ 1400 mm	1200	94	-	475	475	166	3,9X25 YHB	10
ESP-002.E	H: 1400 mm ~ 1600 mm	1400	266	266	575	575	166	3,9X25 YHB	10
ESP-002.F	H: 1600 mm ~ 1800 mm	1600	300	300	675	675	200	3,9X25 YHB	10
ESP-002.G	H: 1800 mm ~ 2000 mm	1800	300	300	775	775	200	3,9X25 YHB	12
ESP-002.H	H: 2000 mm ~ 2100 mm	2000	300	300	775	775	200	3,9X25 YHB	12

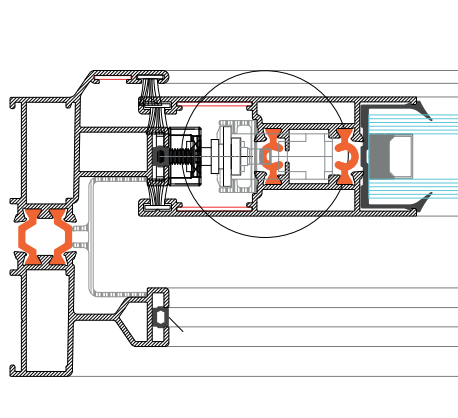


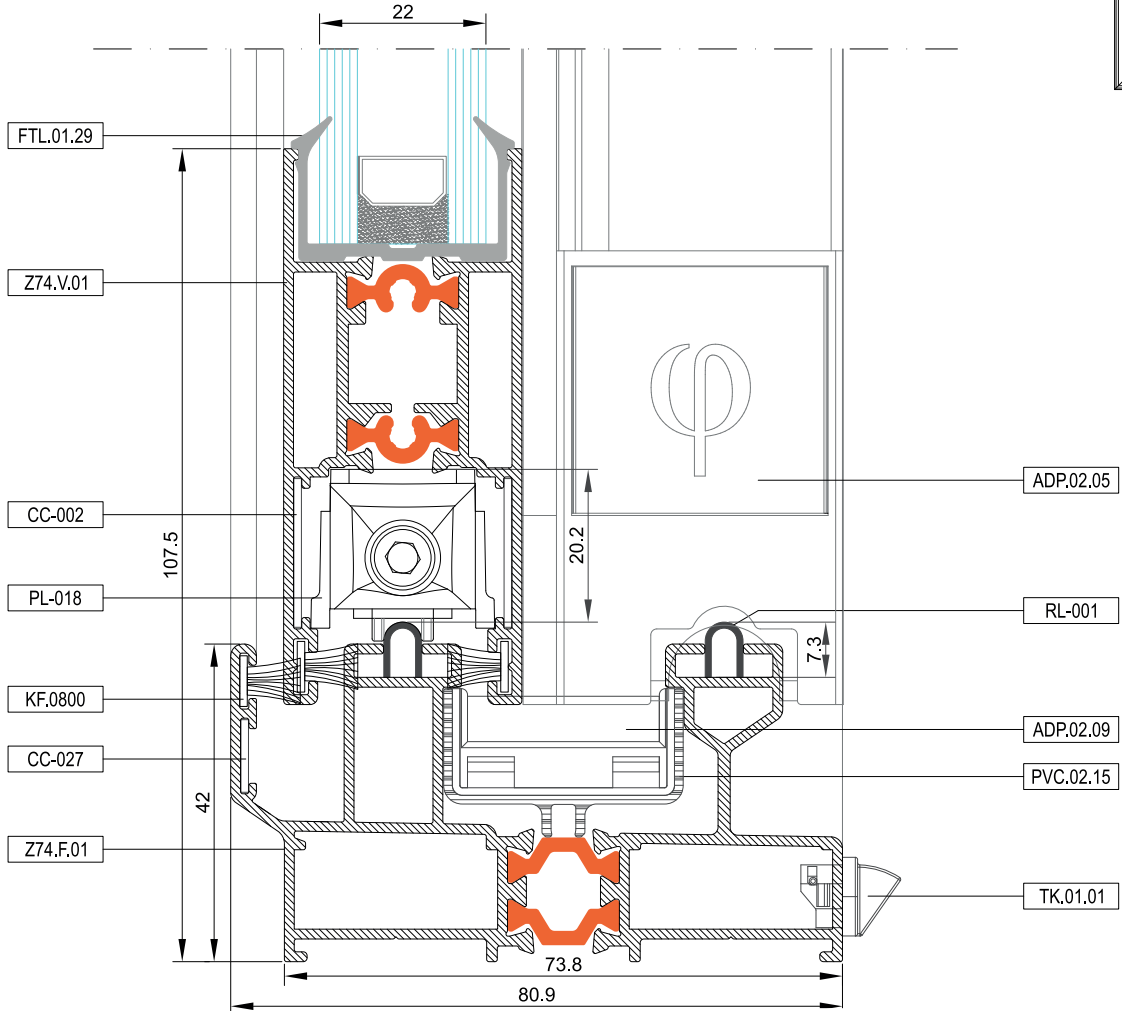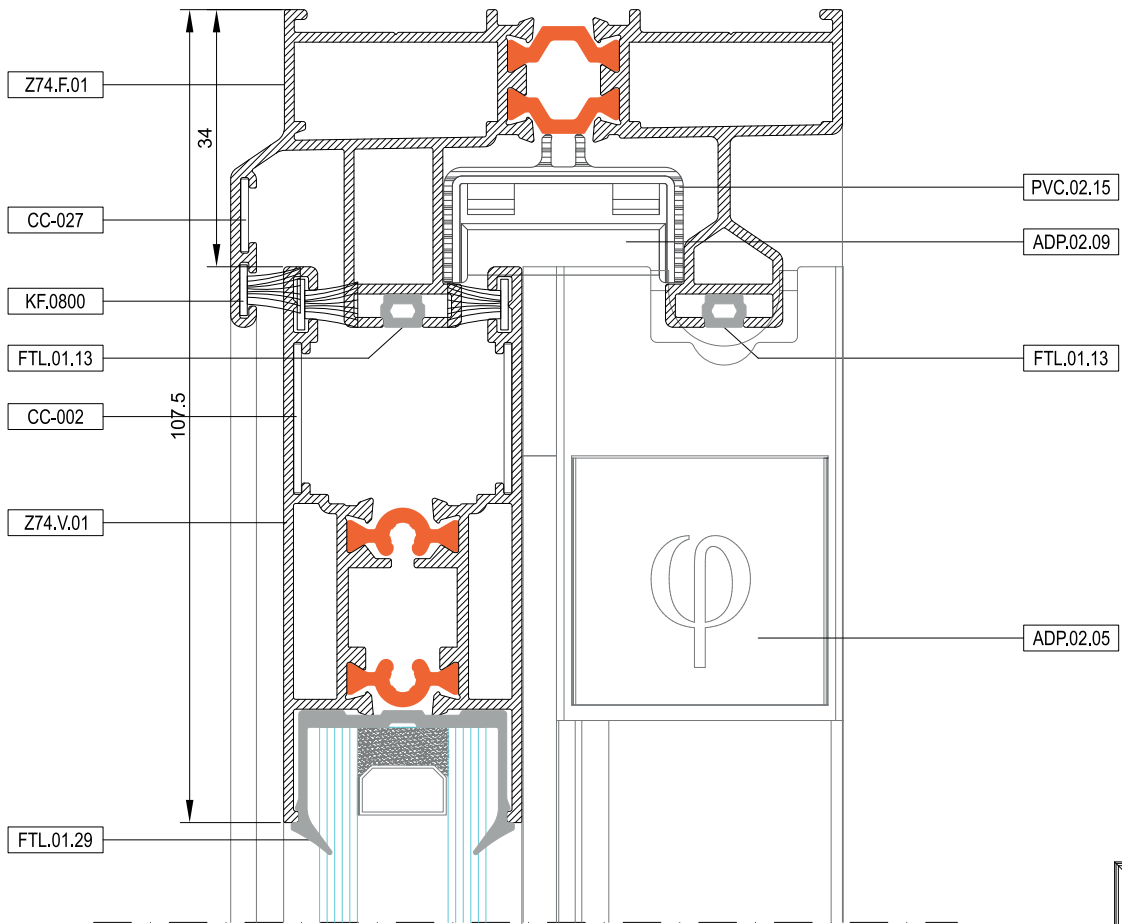

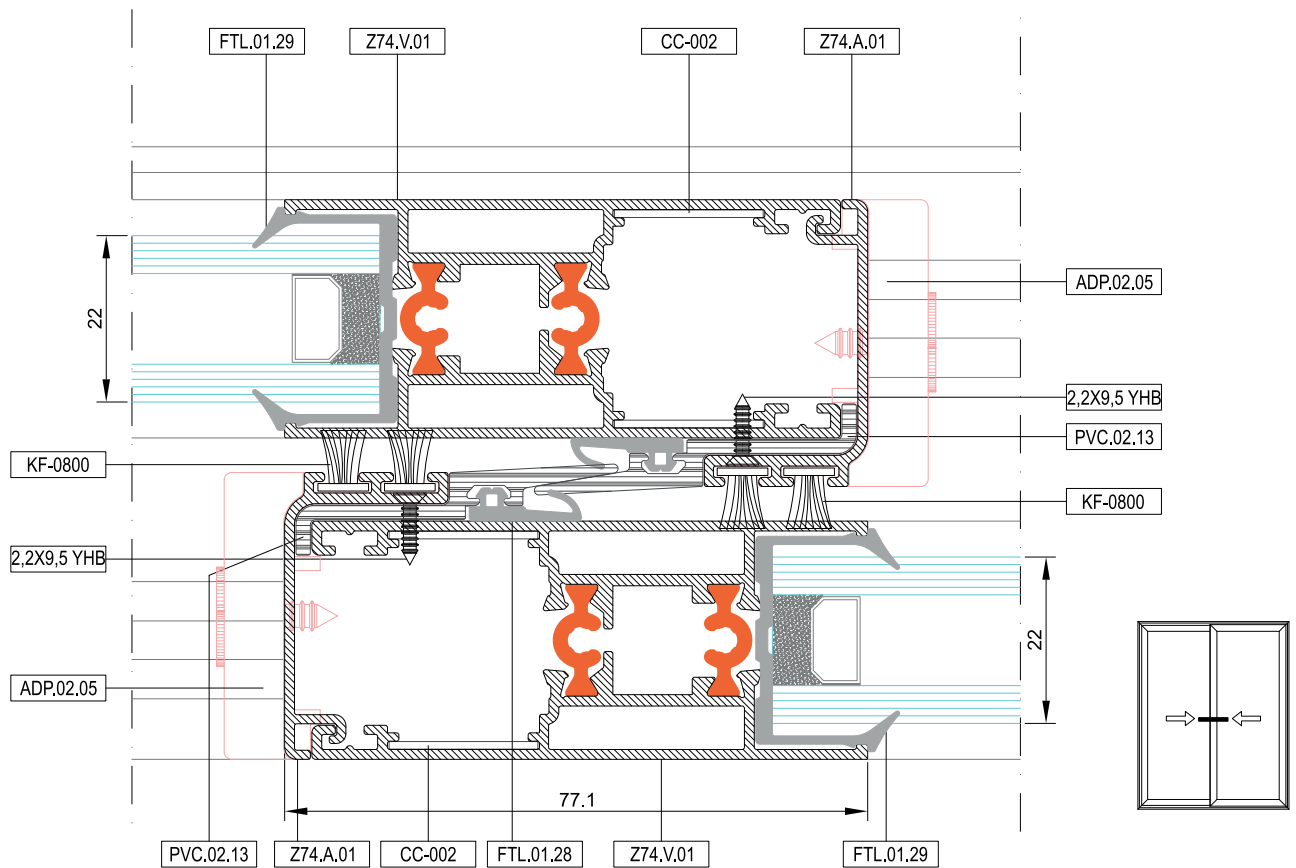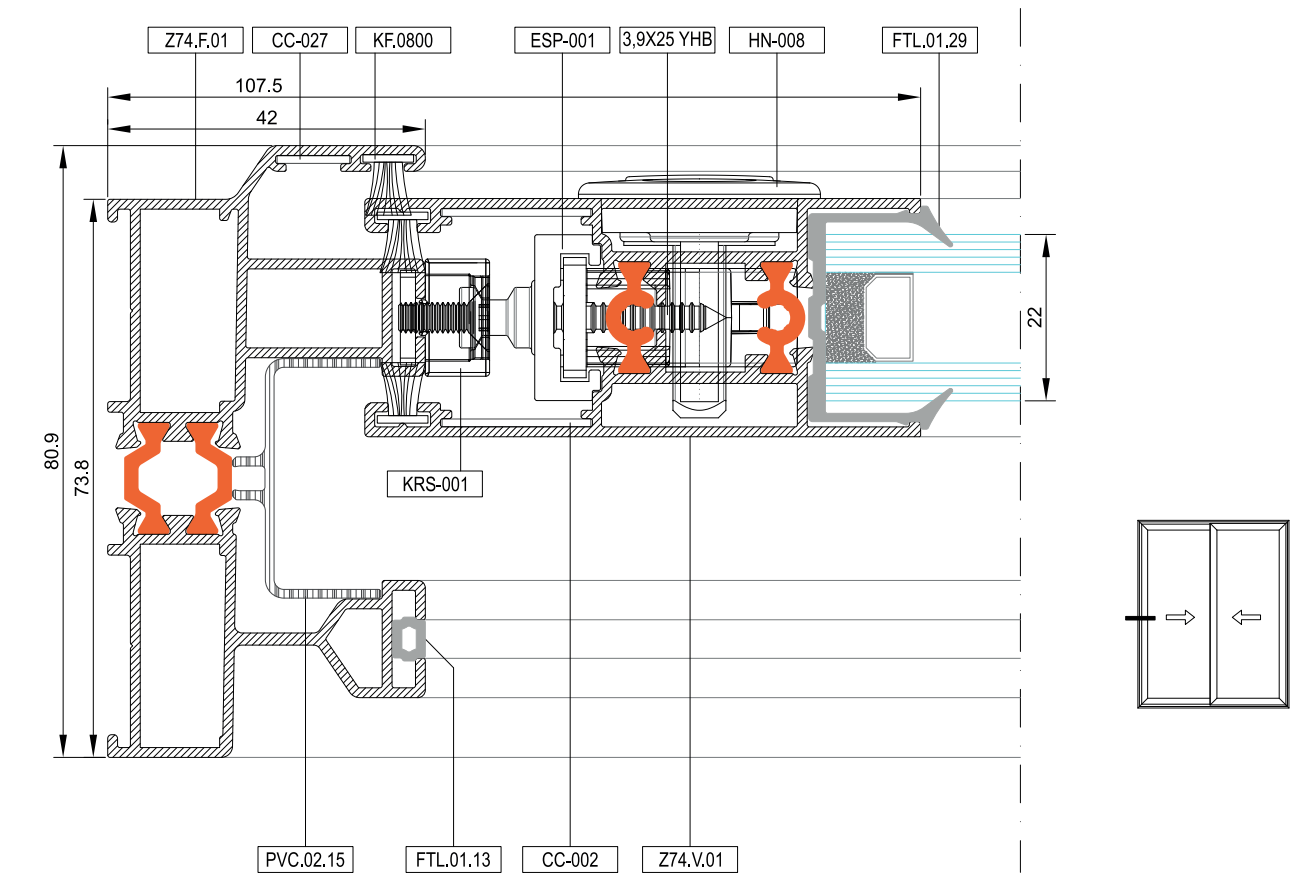


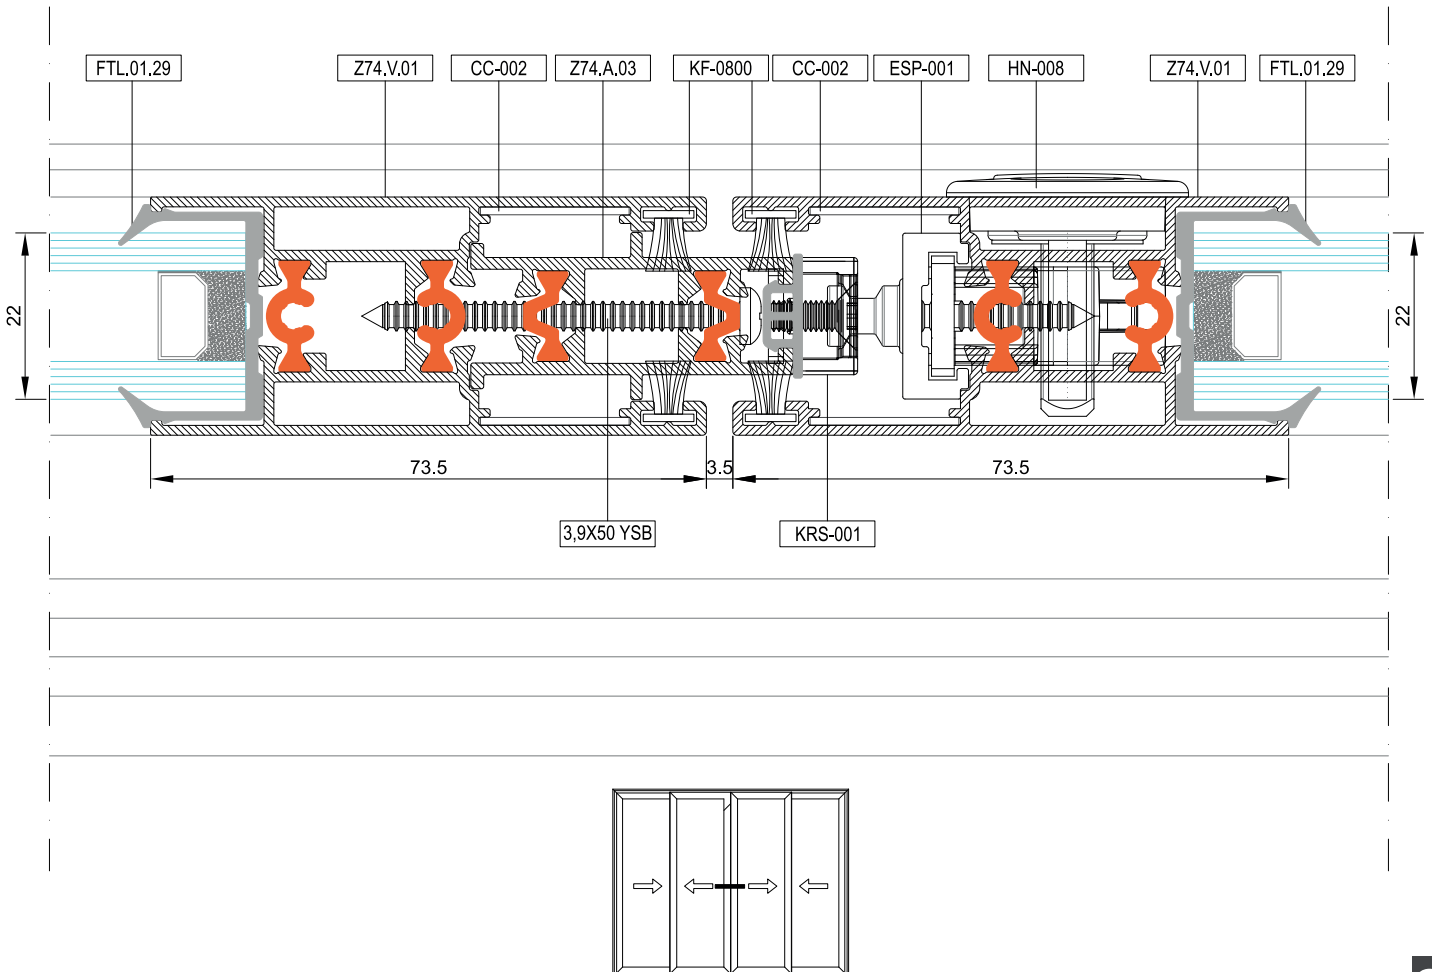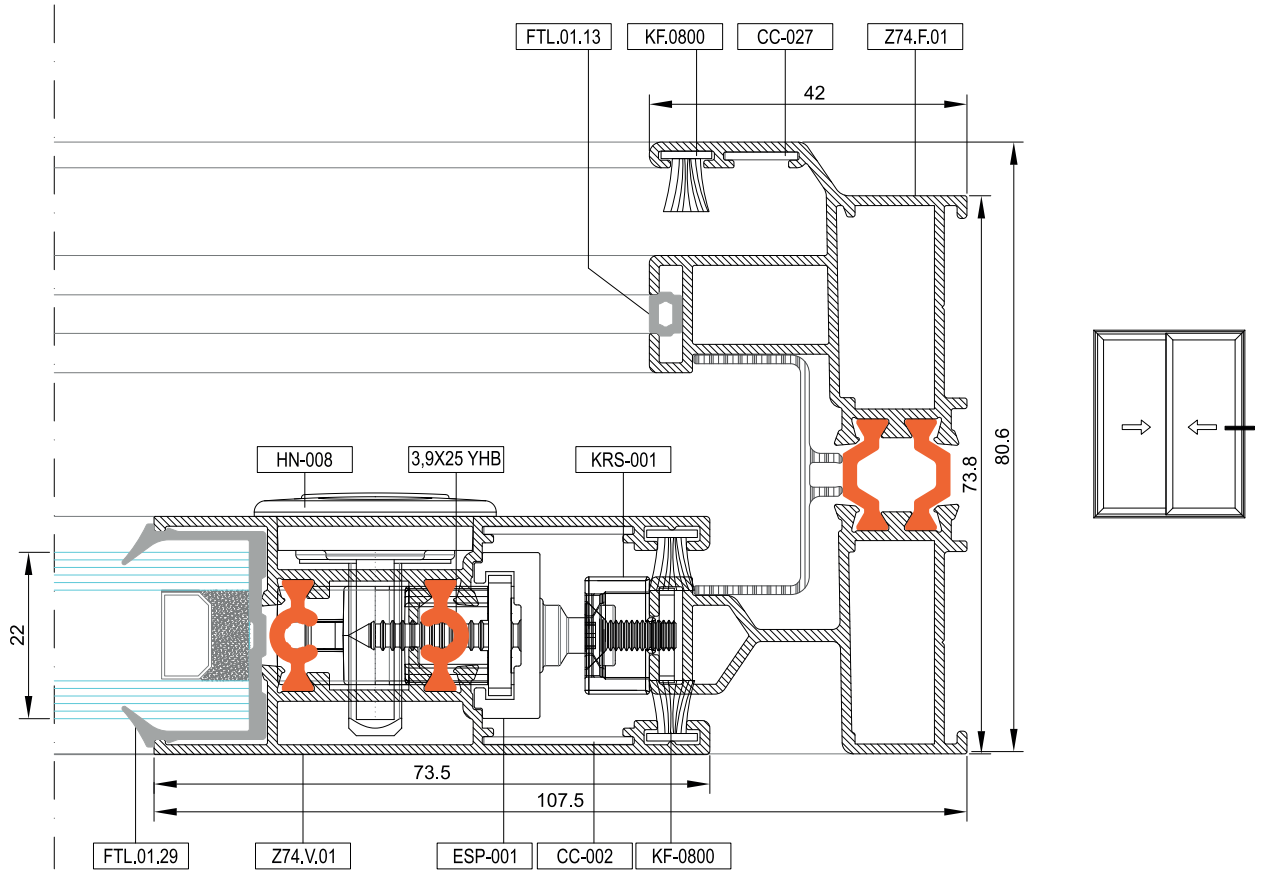


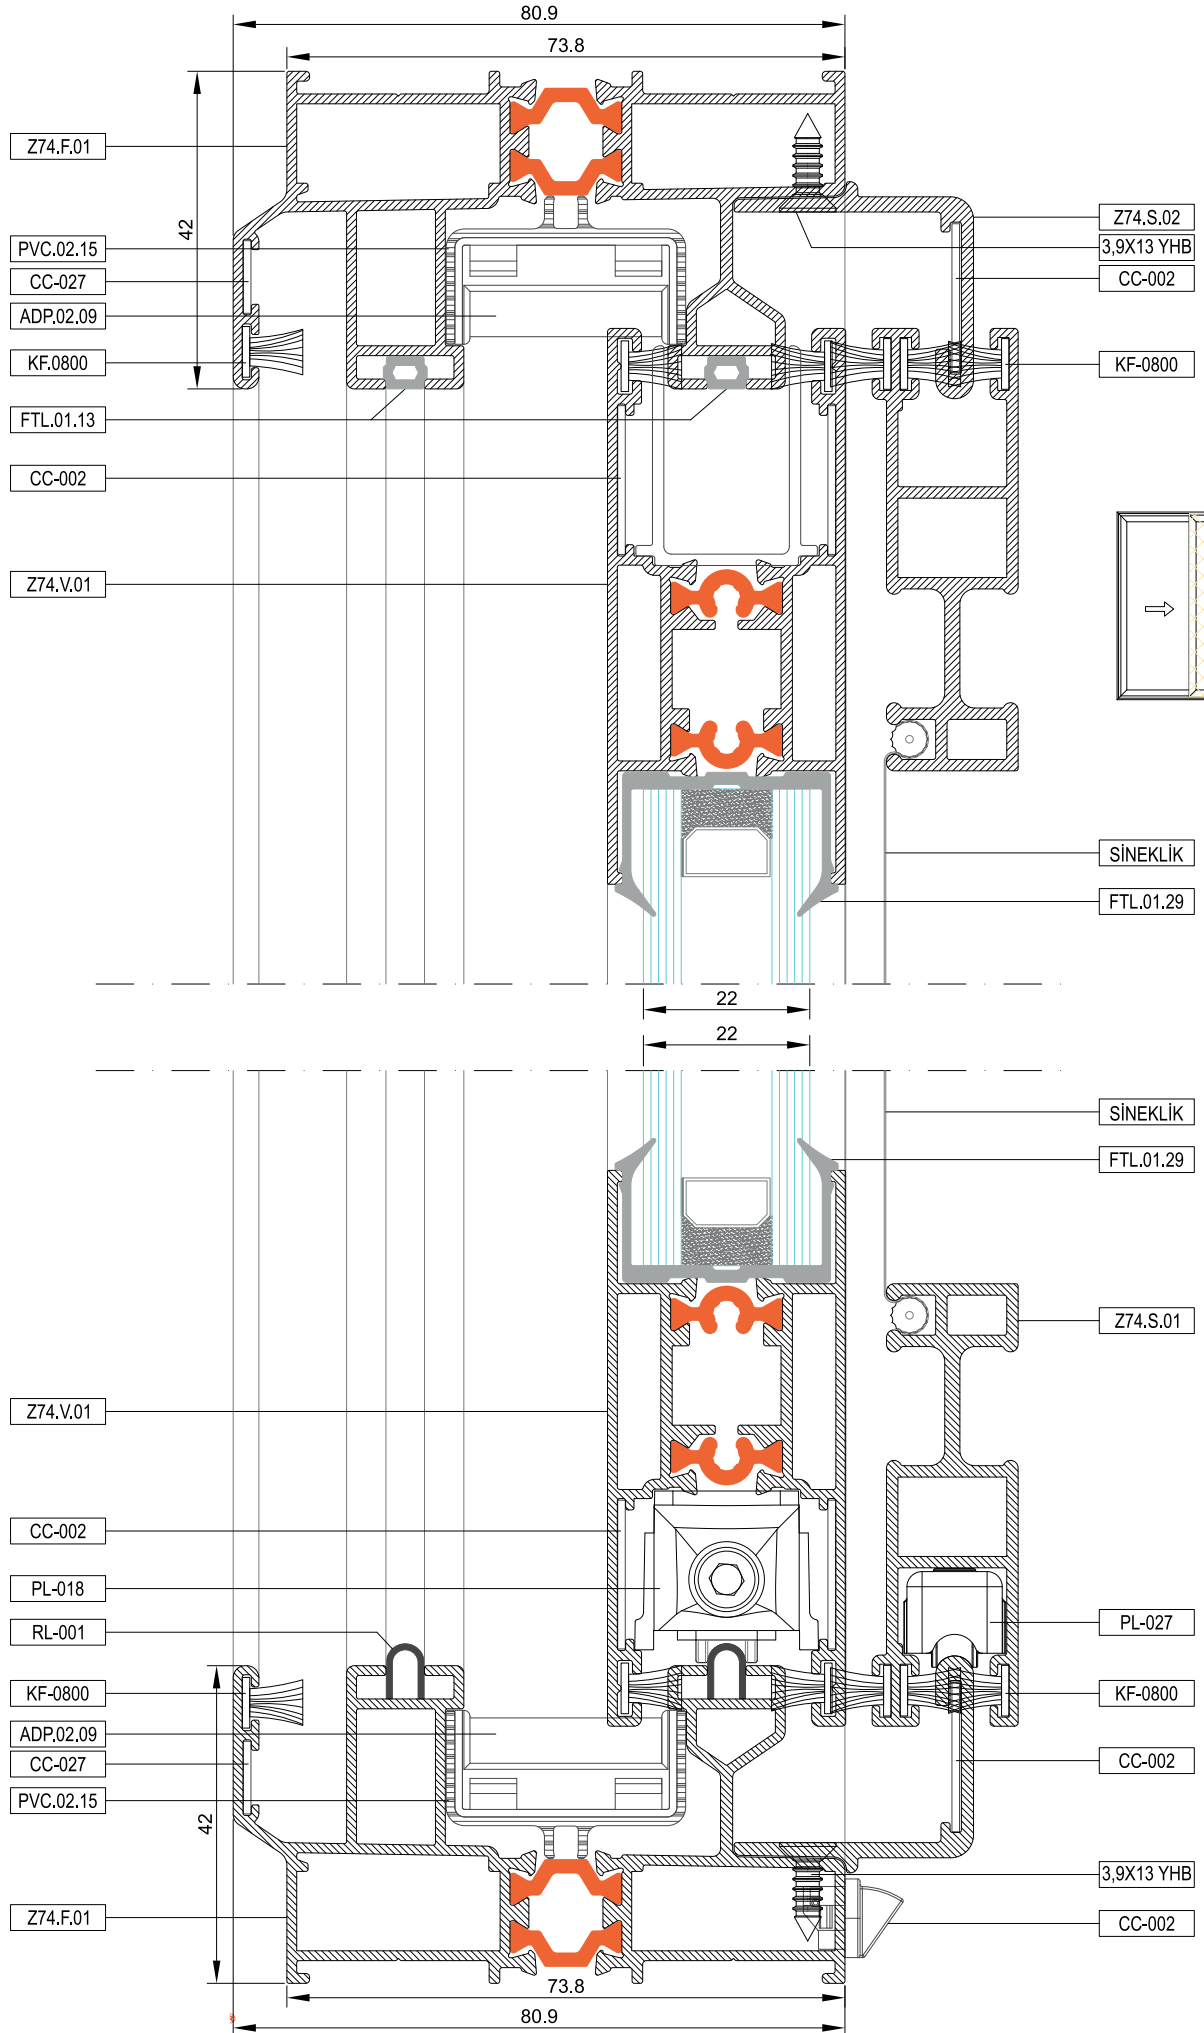





PVC KOL DETAYI

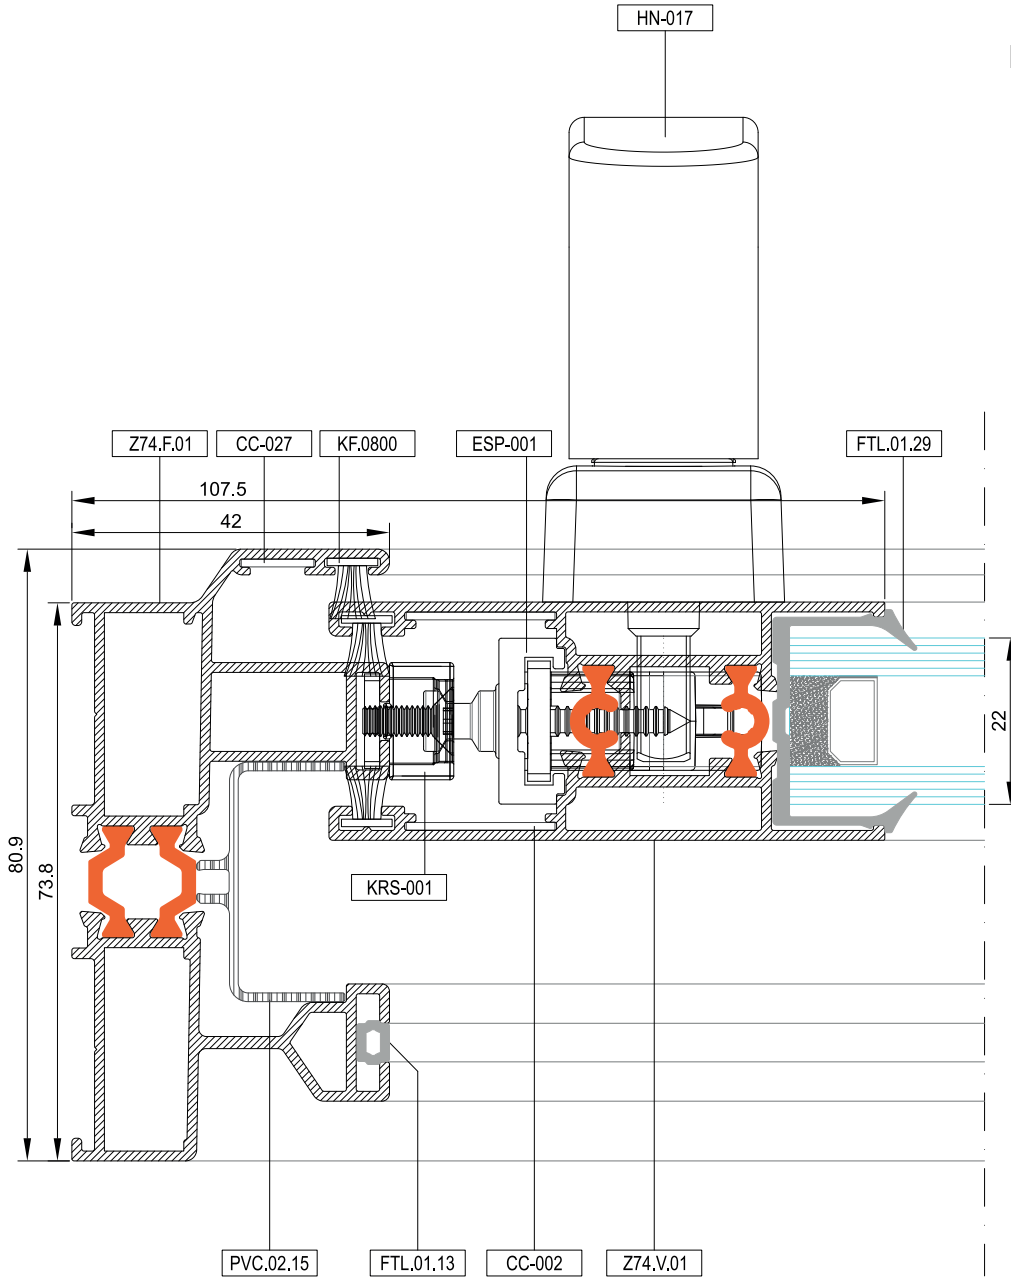





KİLİTLİ KAPI DETAYI

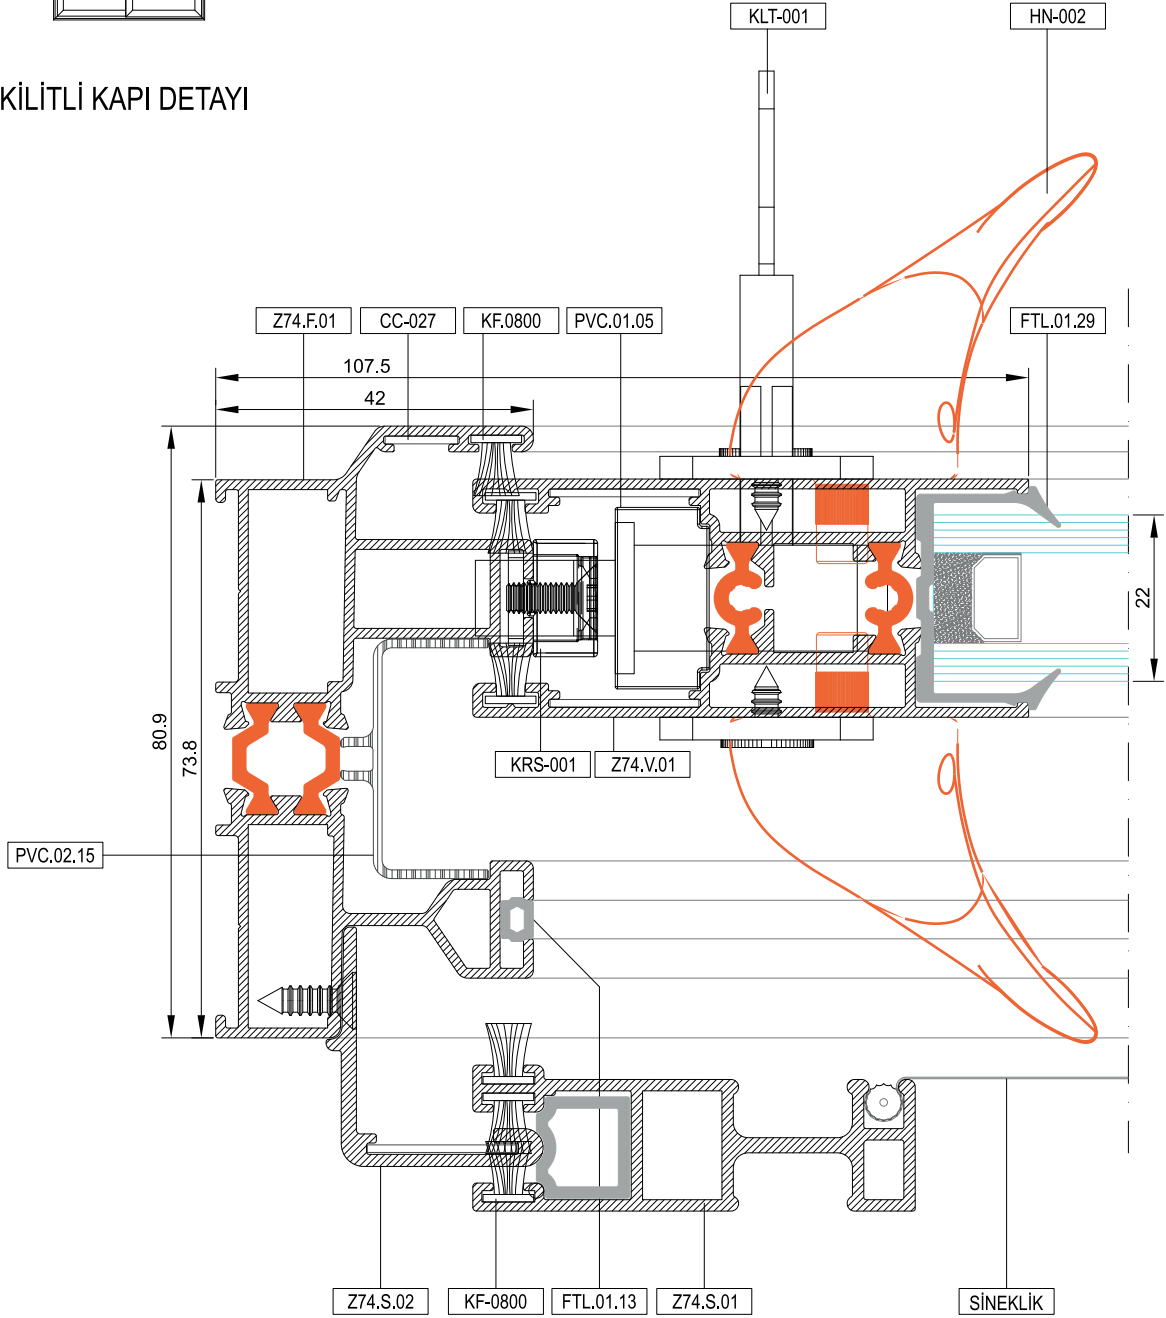





HAVUZ KİLİT DETAYI

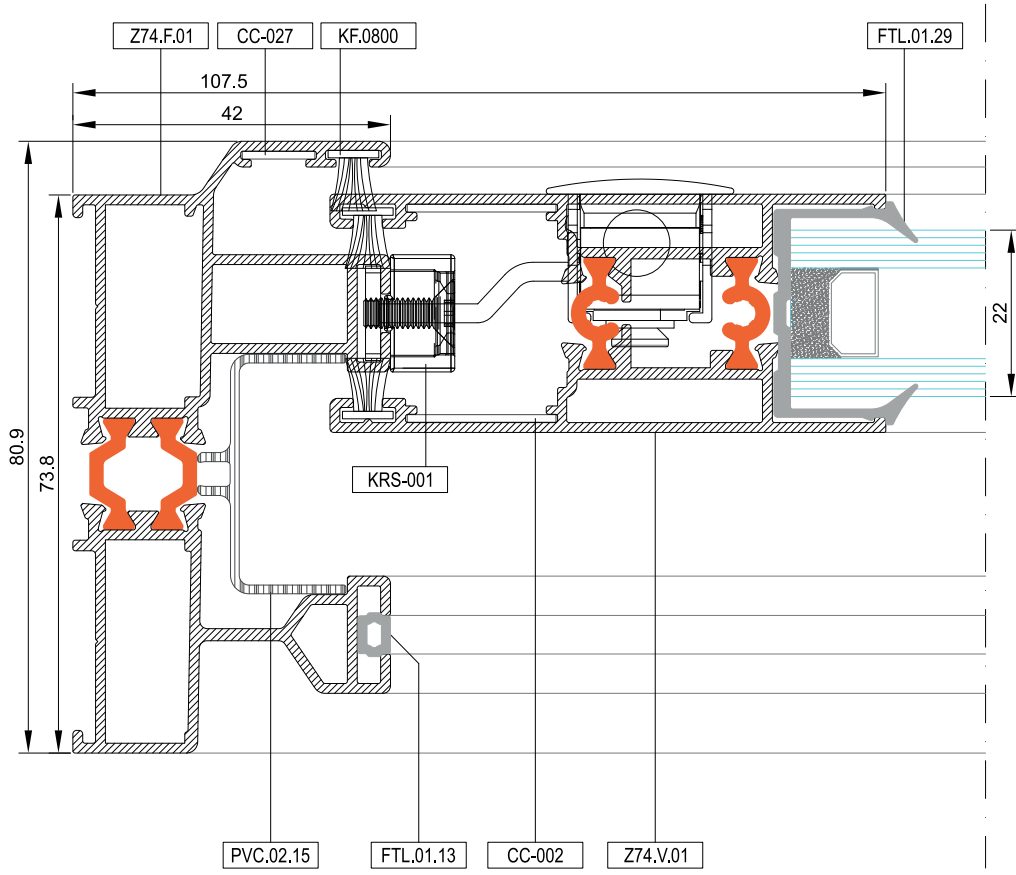





PVC İSPANYOLET DETAYI




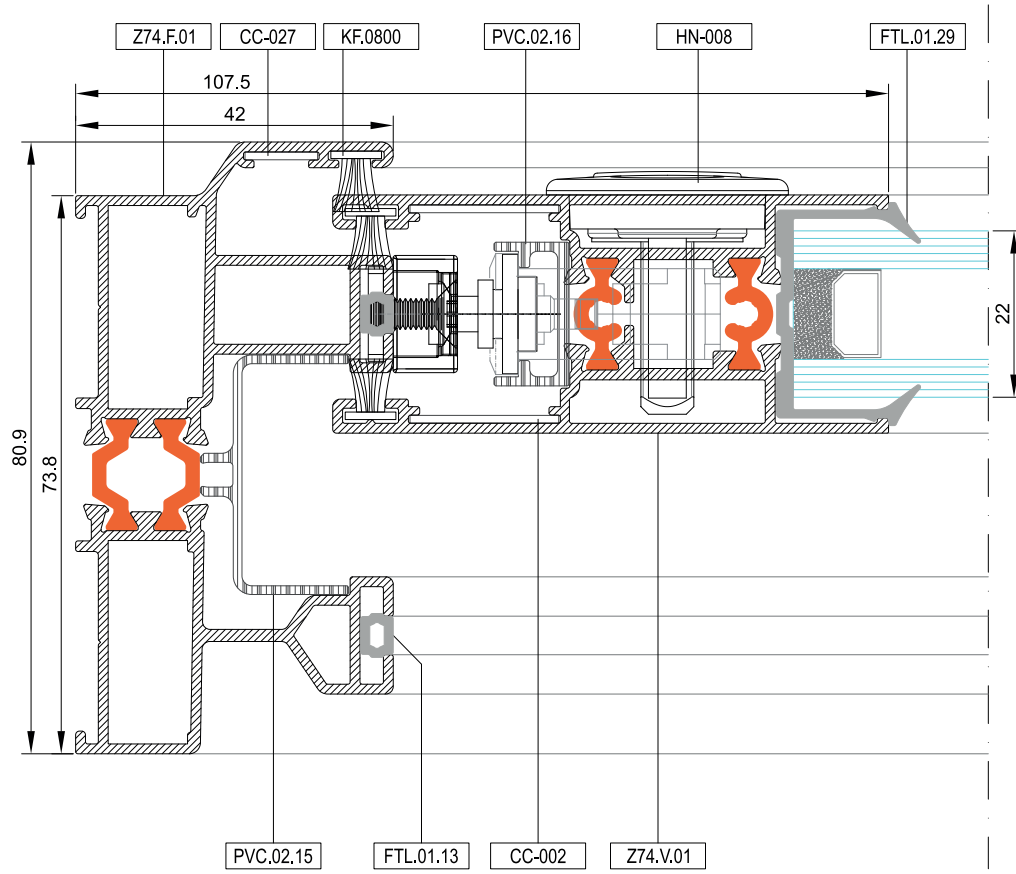










90° KÖŞE DETAYI

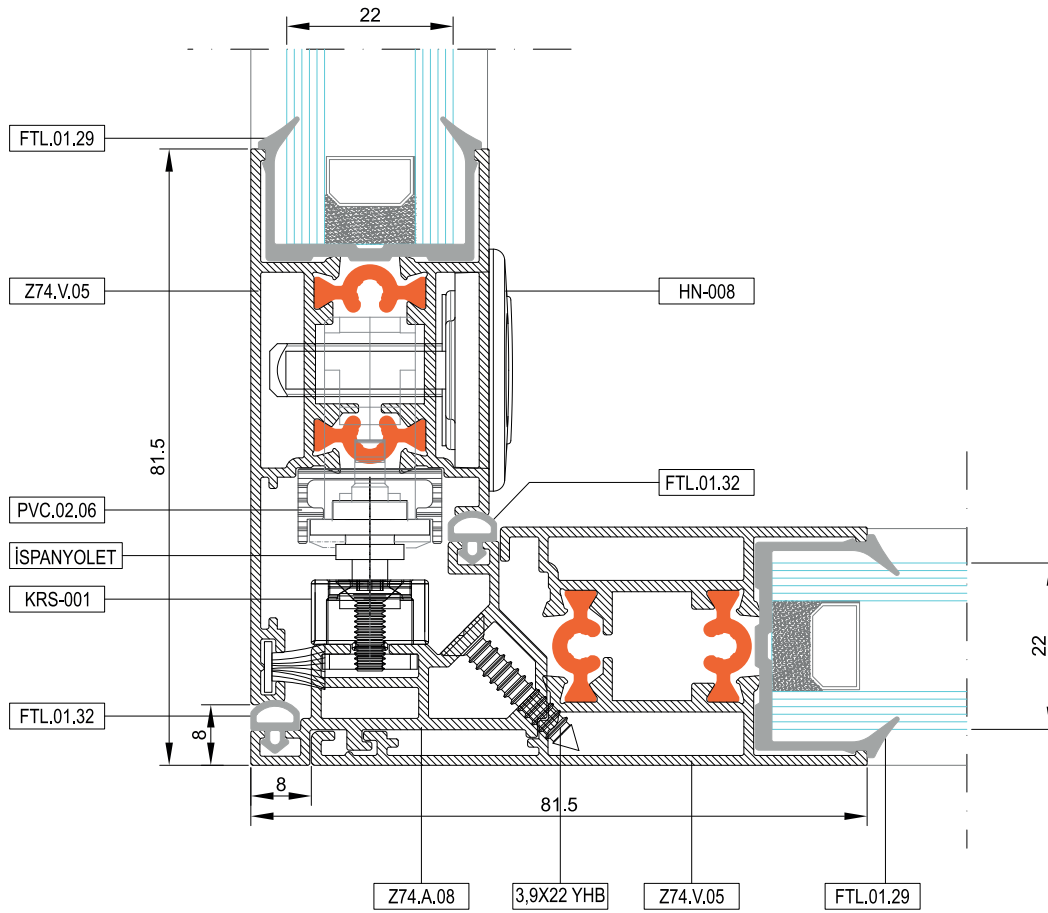


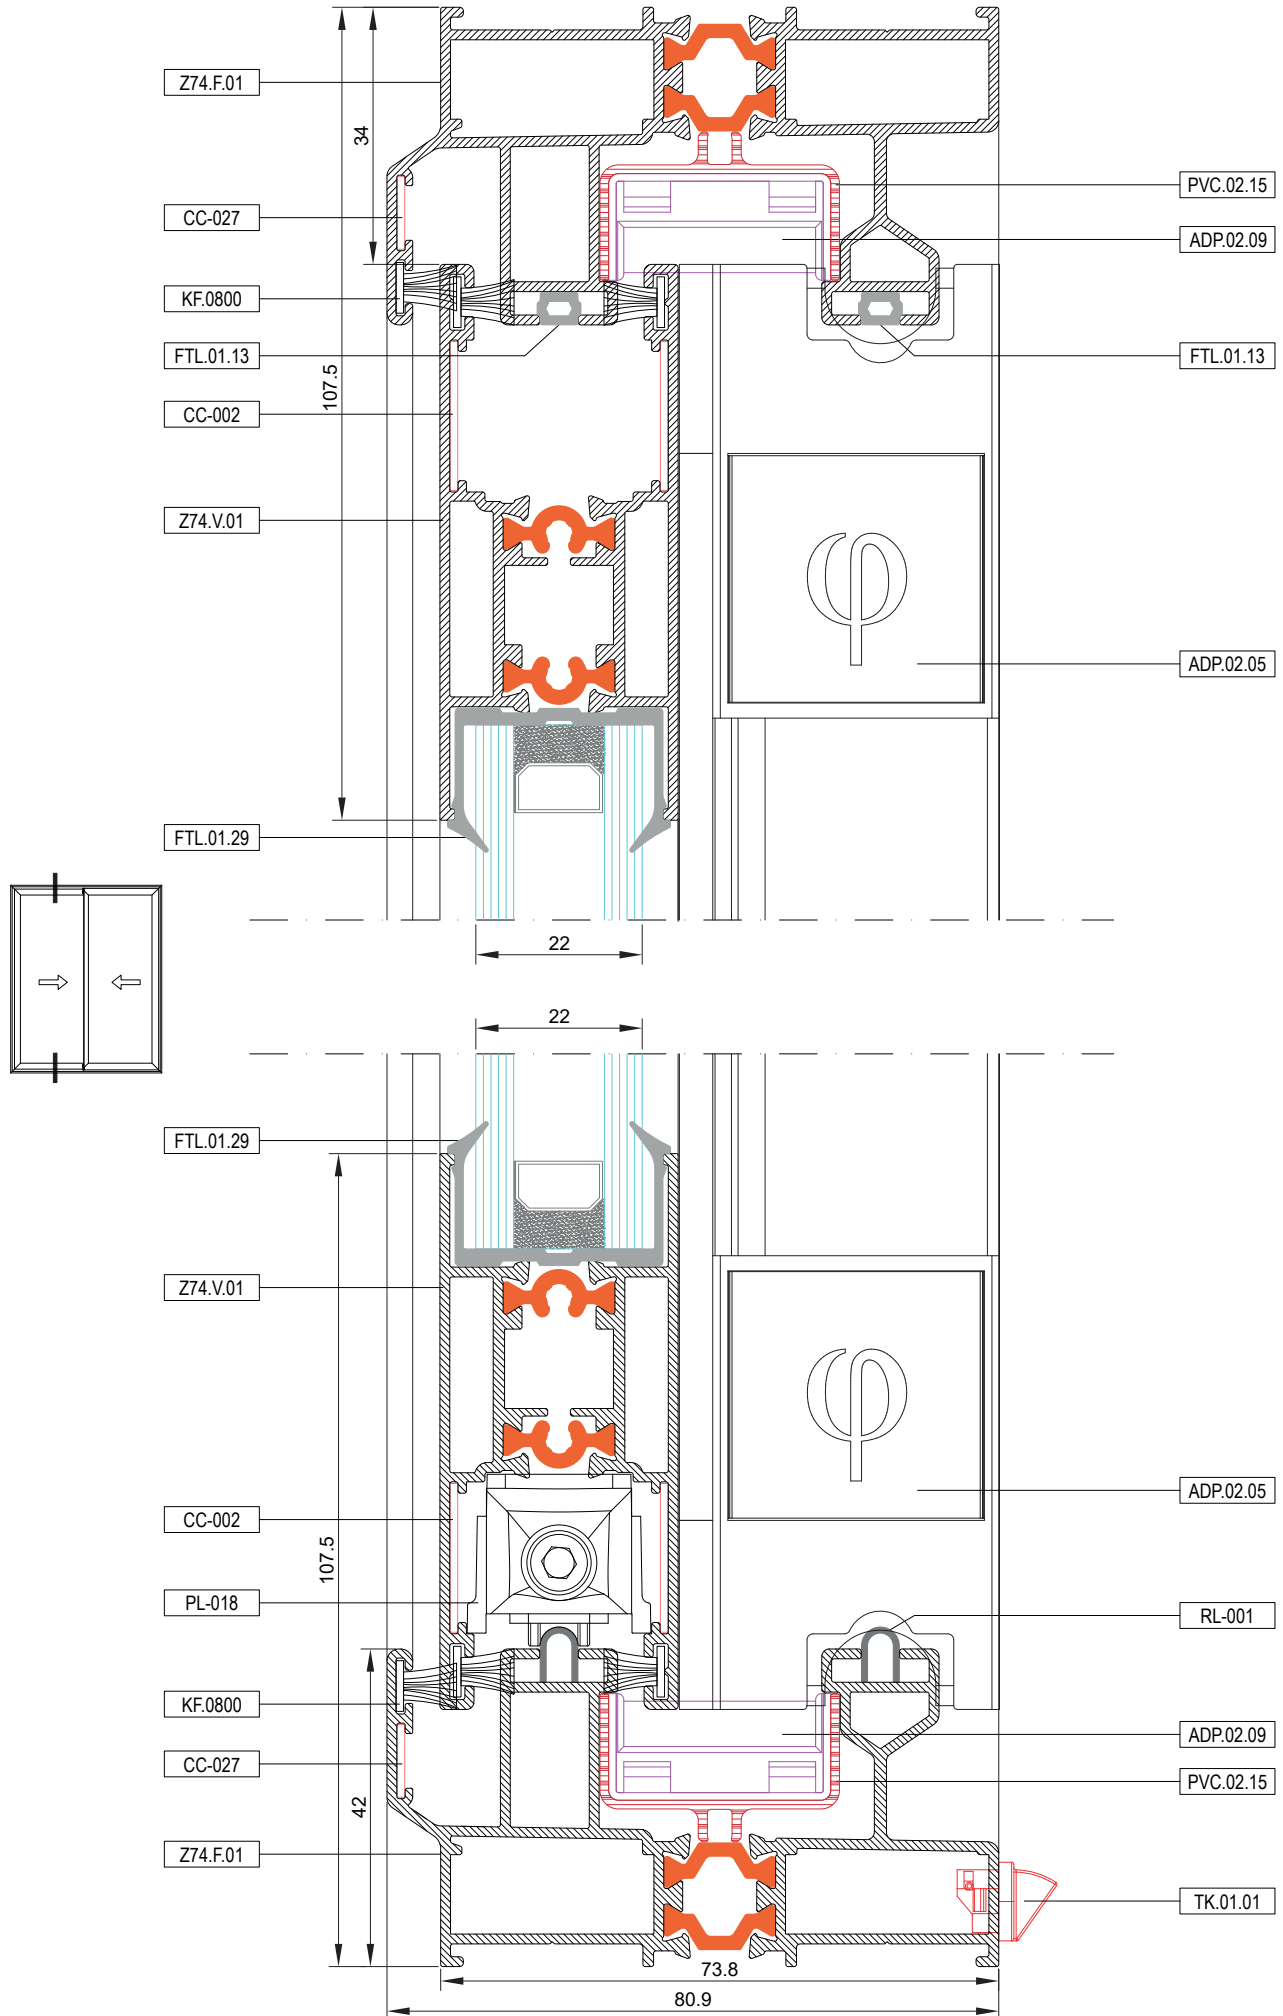


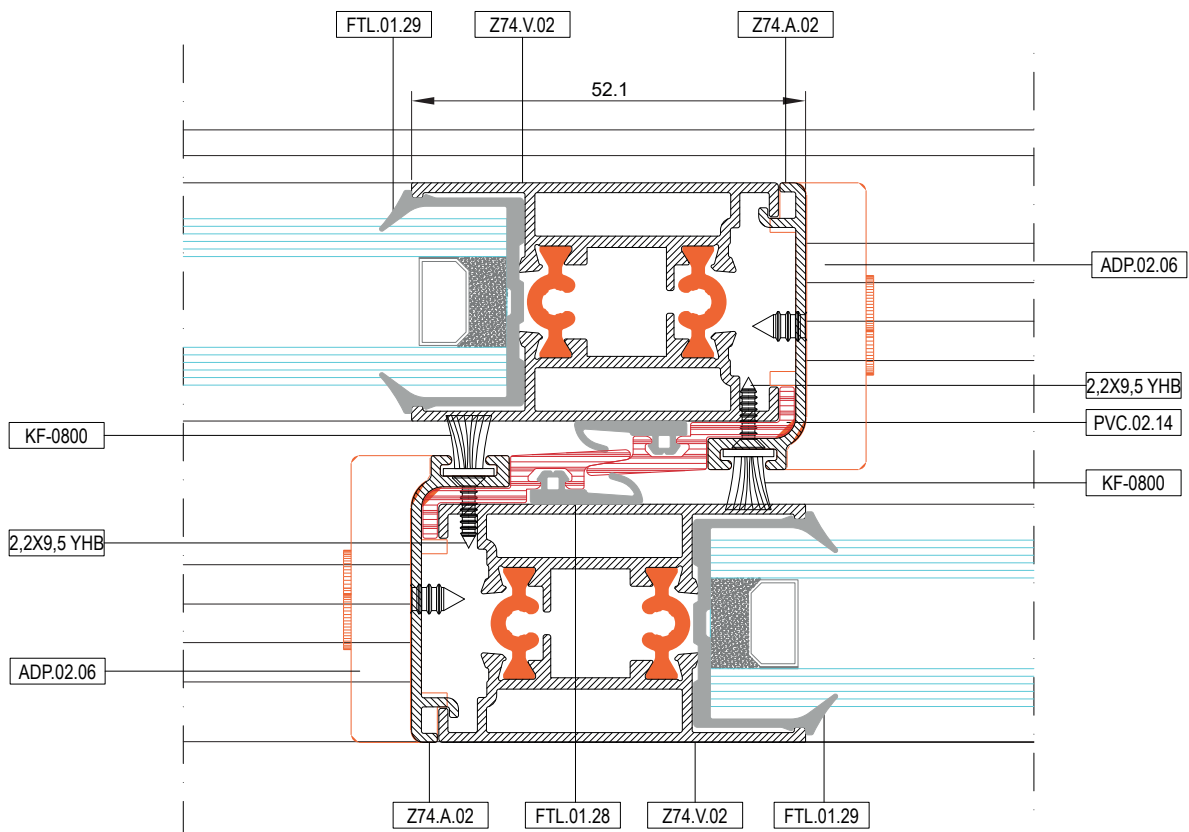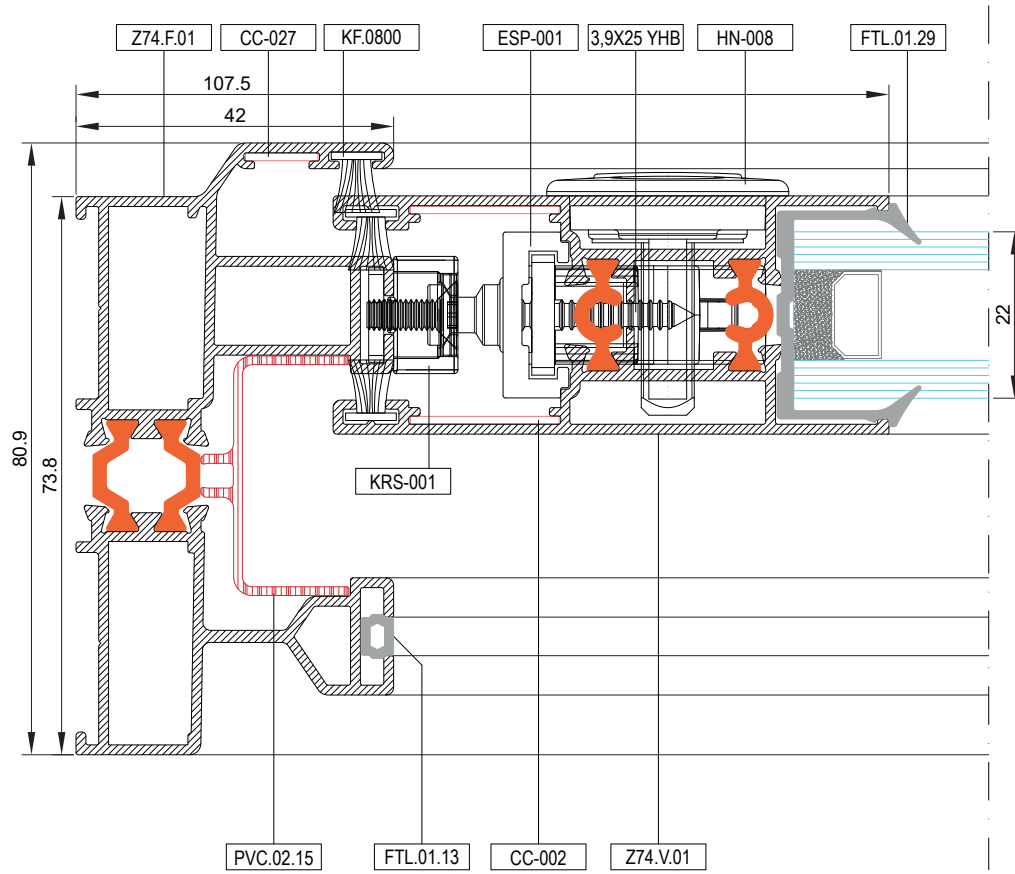

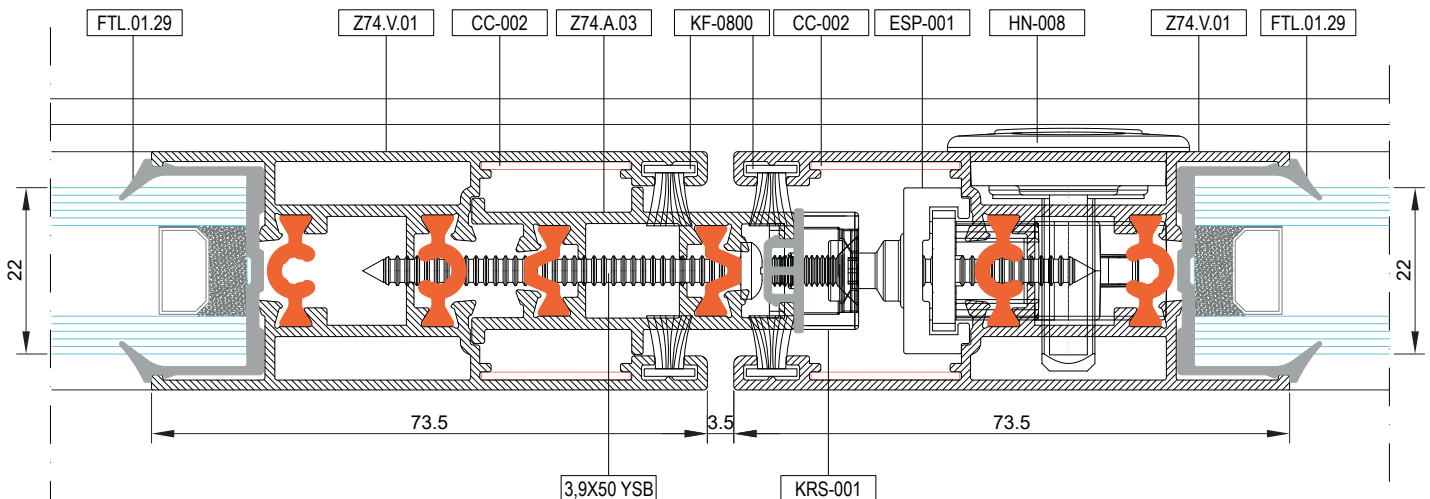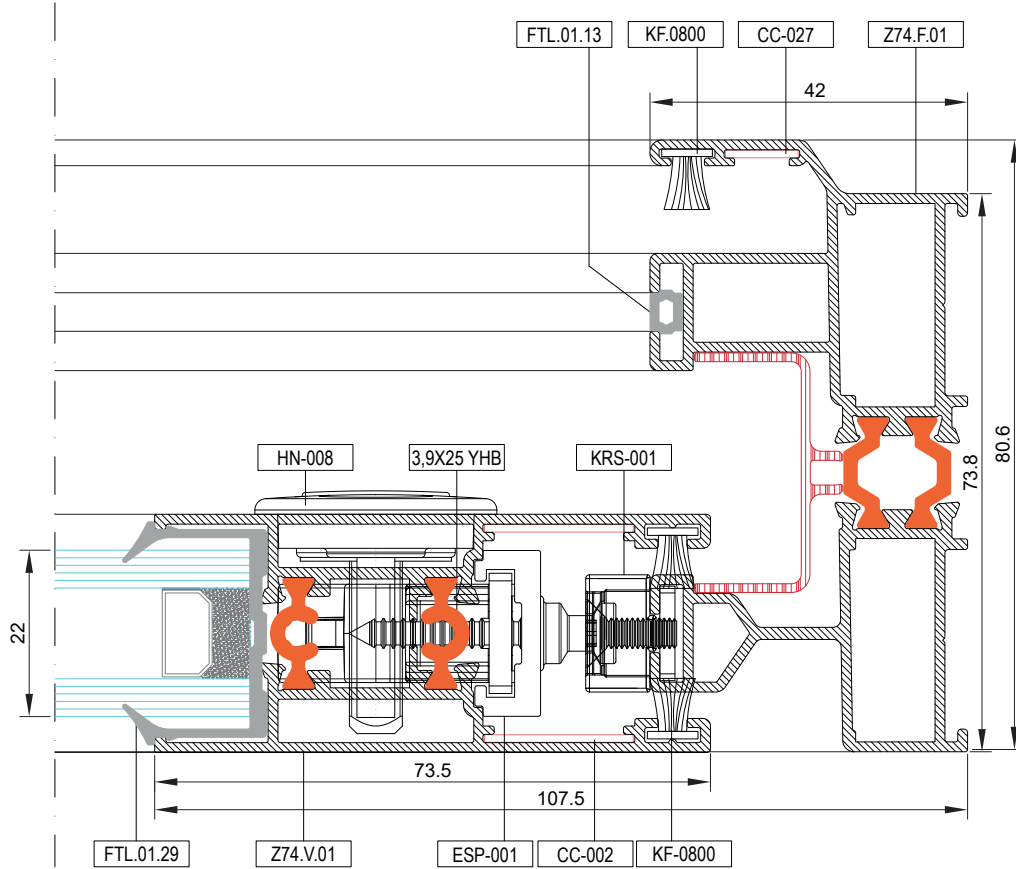


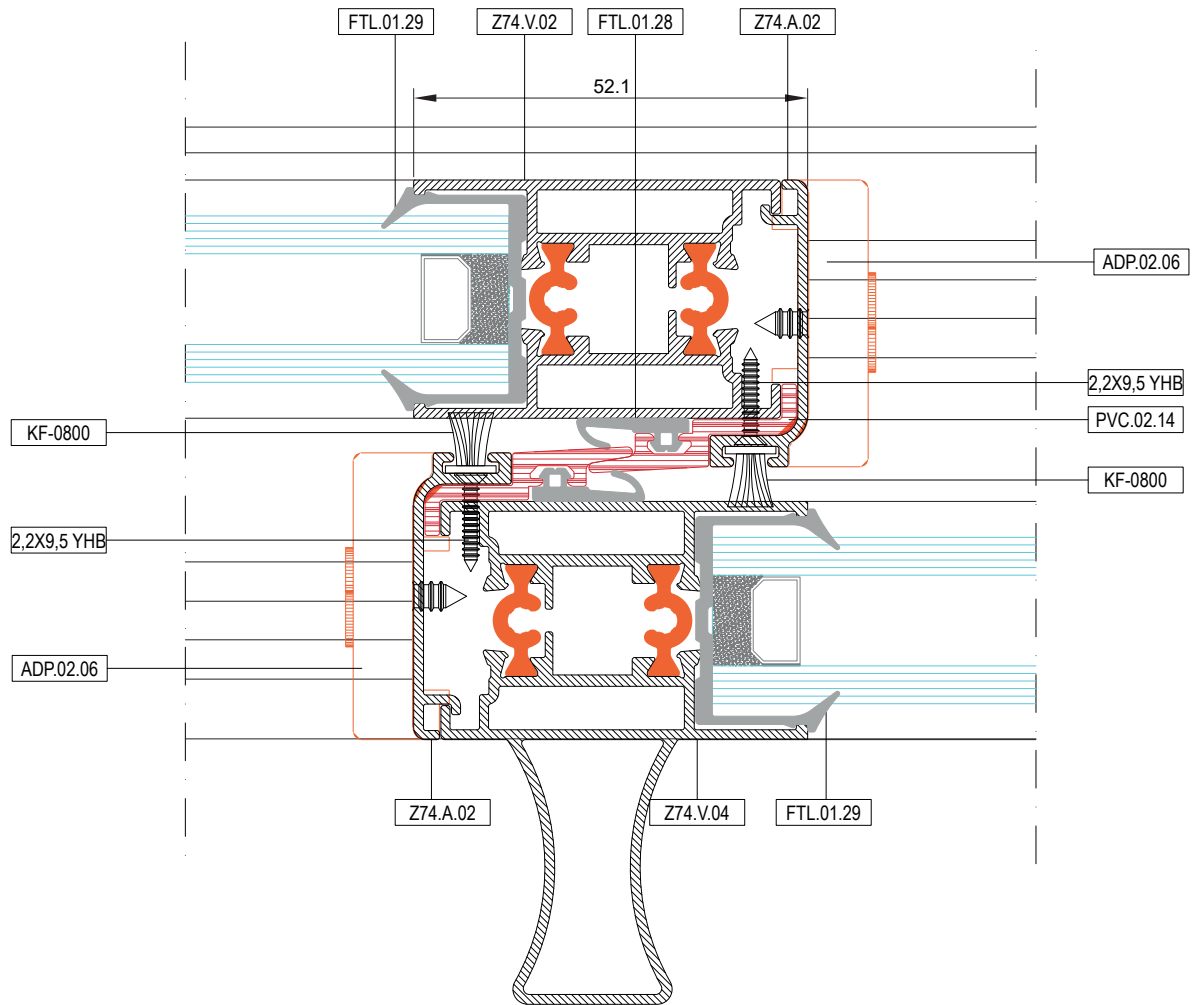


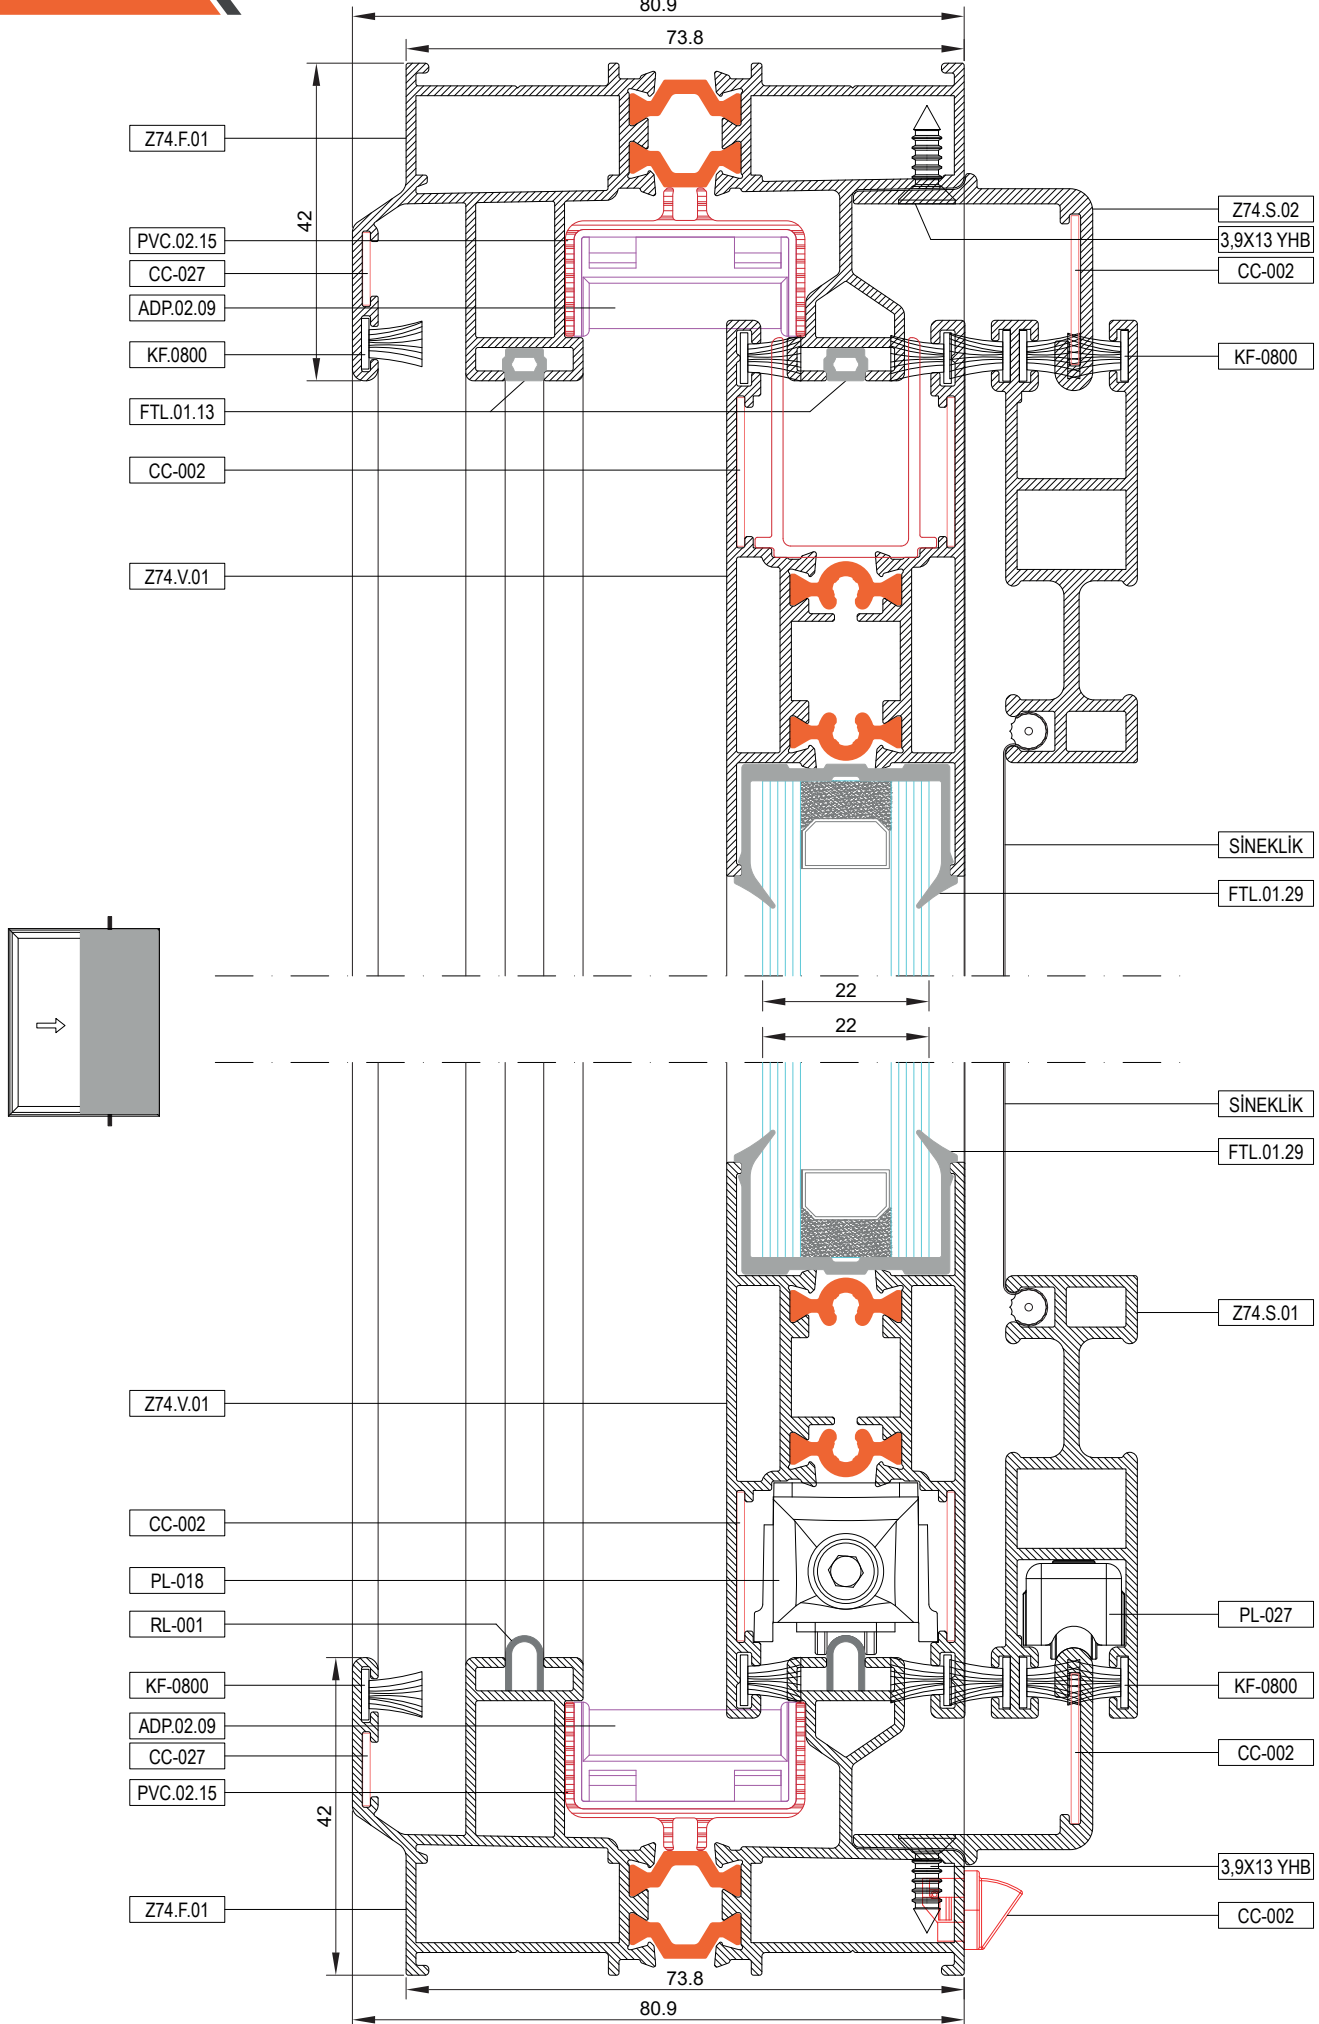





PVC KOL DETAYI

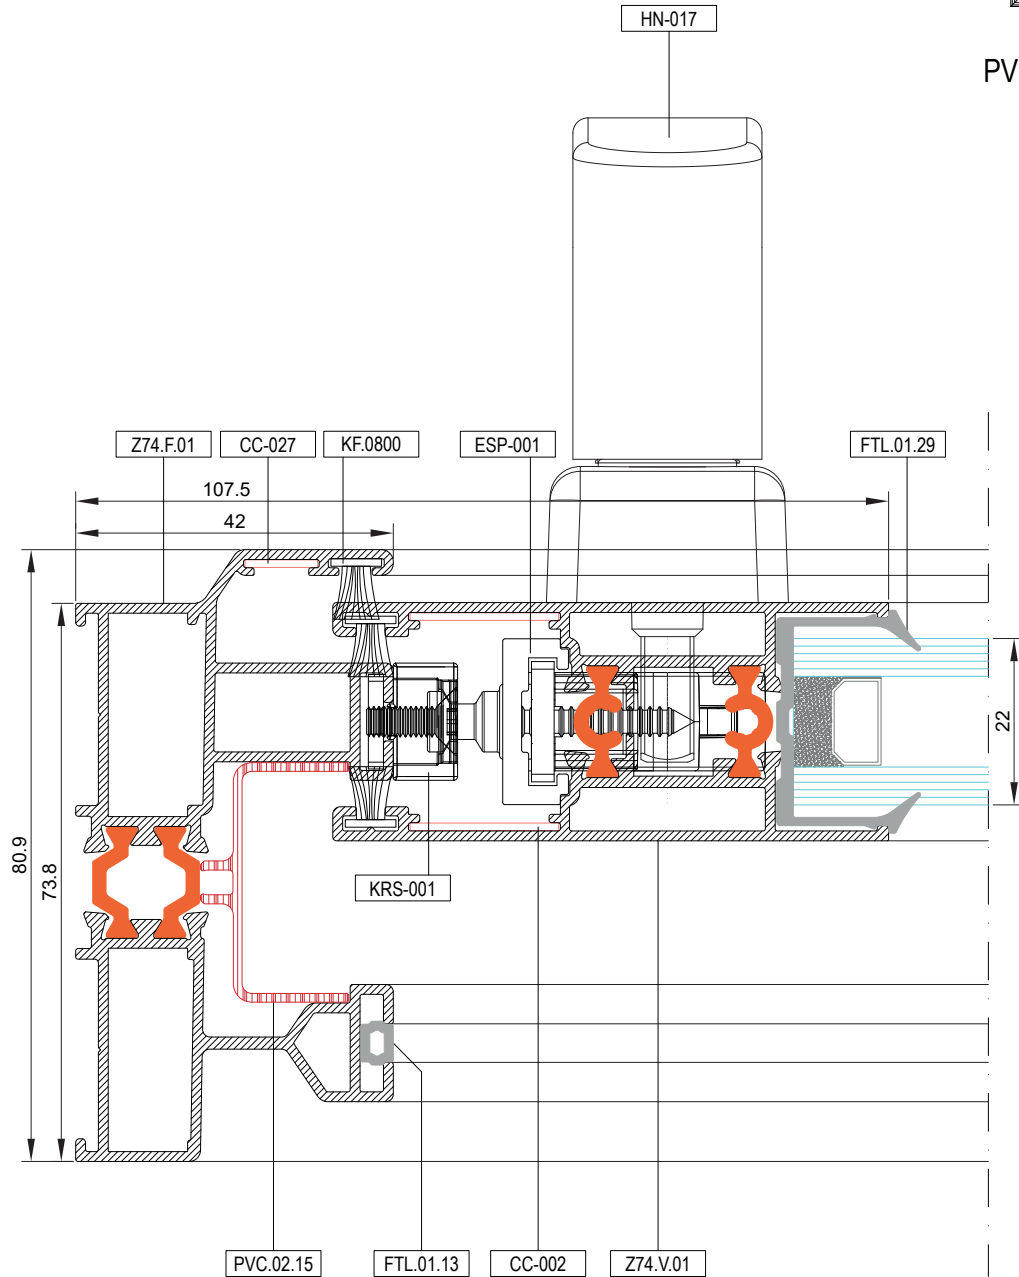





KİLİTLİ KAPI DETAYI

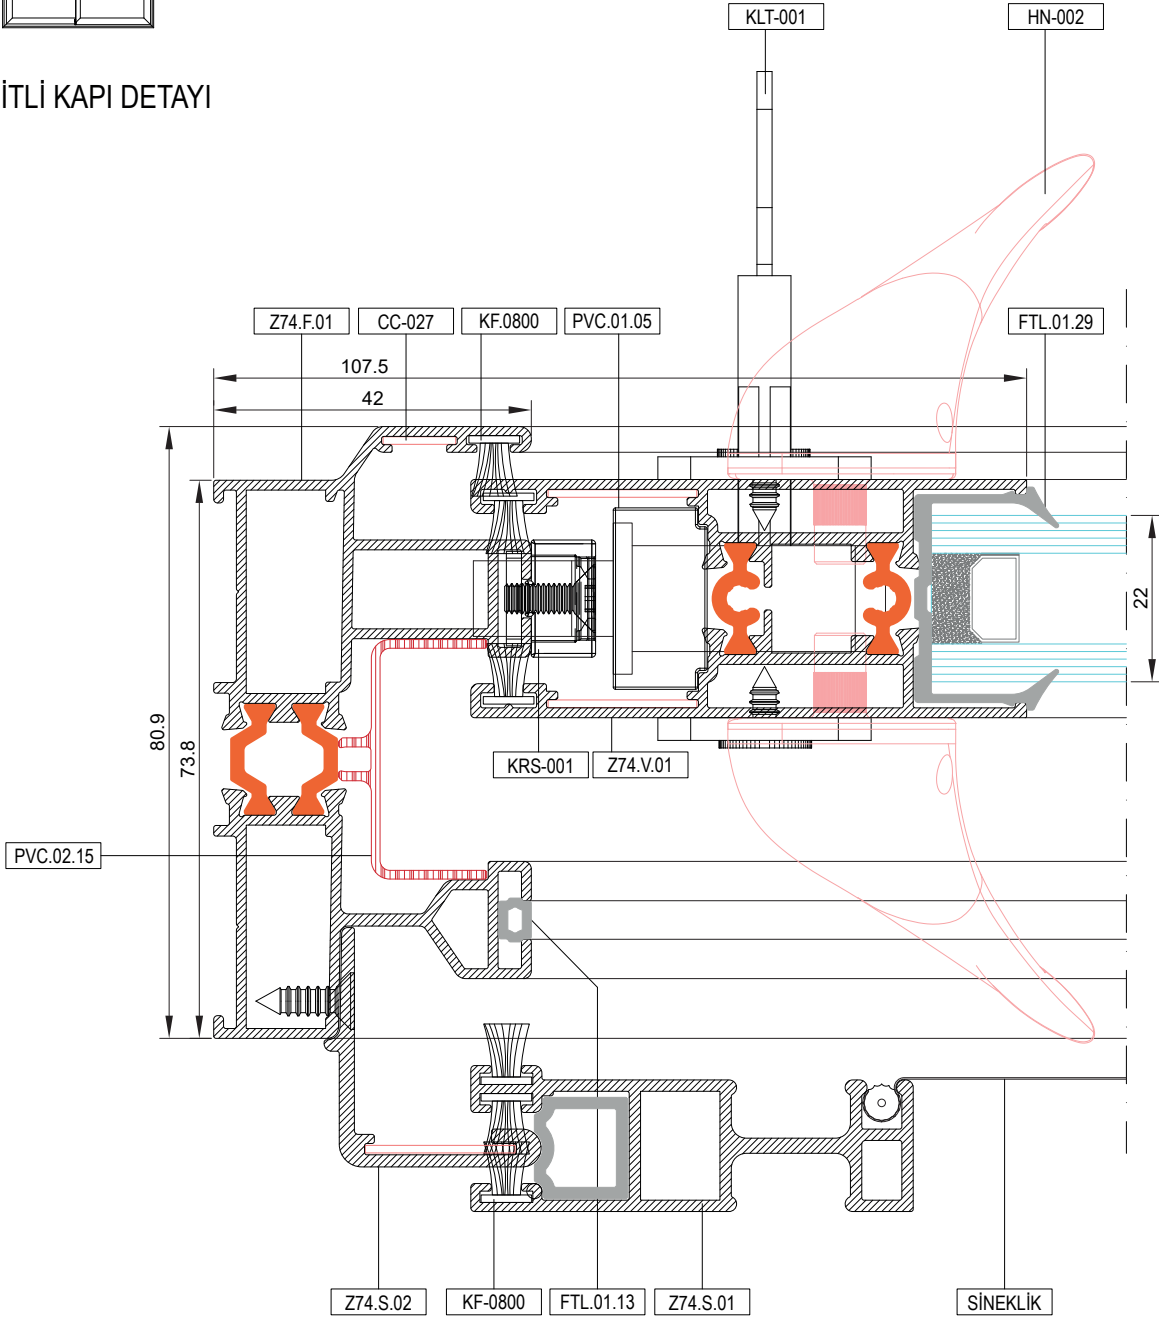





HAVUZ KİLİT DETAYI

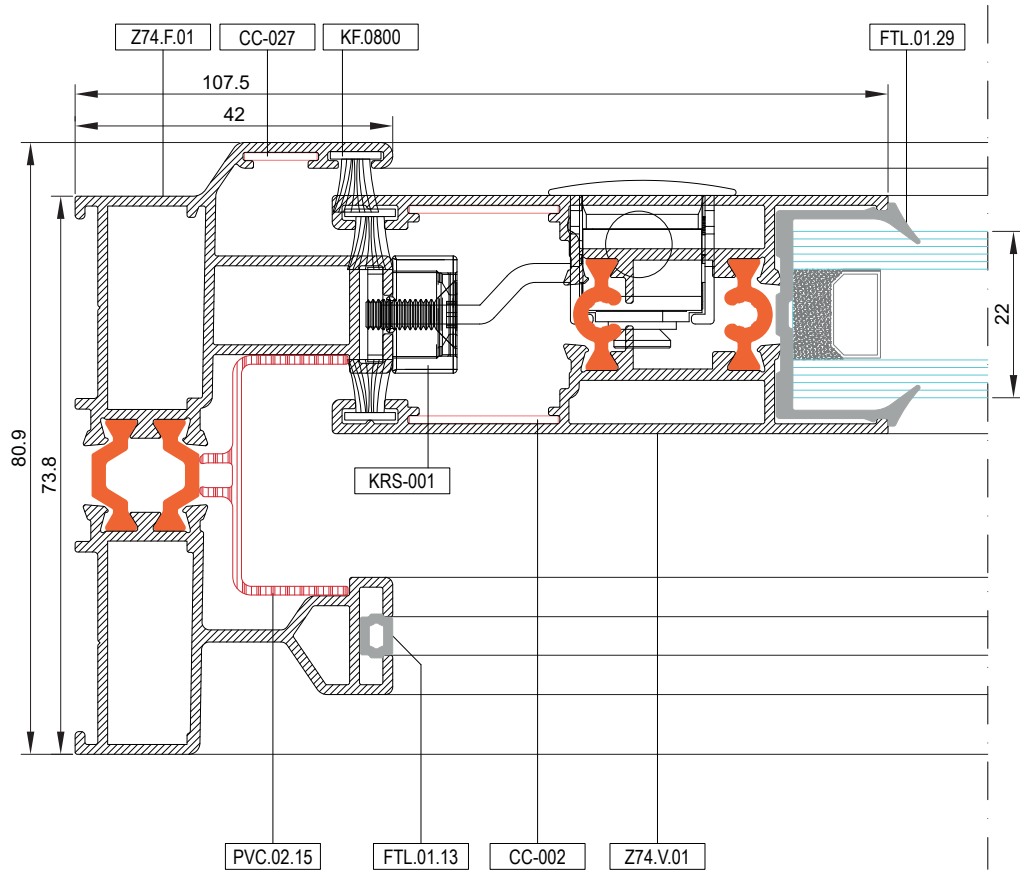






PVC İSPANYOLET DETAYI


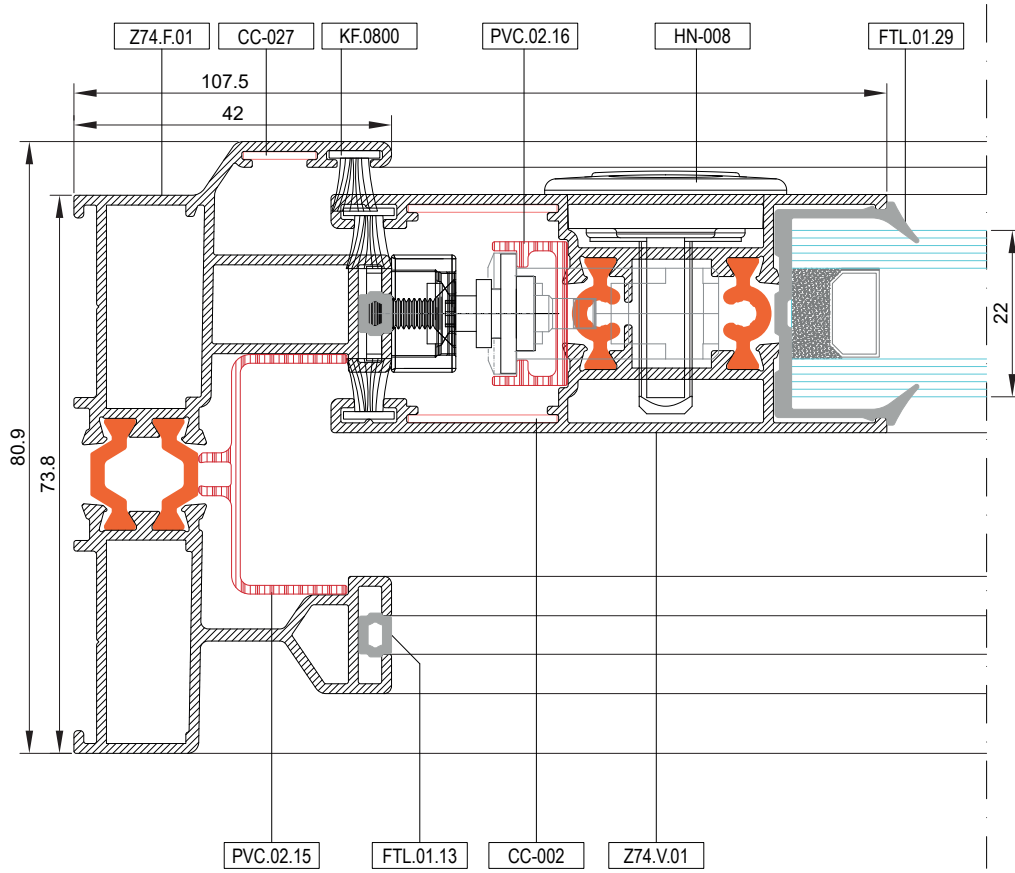










90° KÖŞE DETAYI


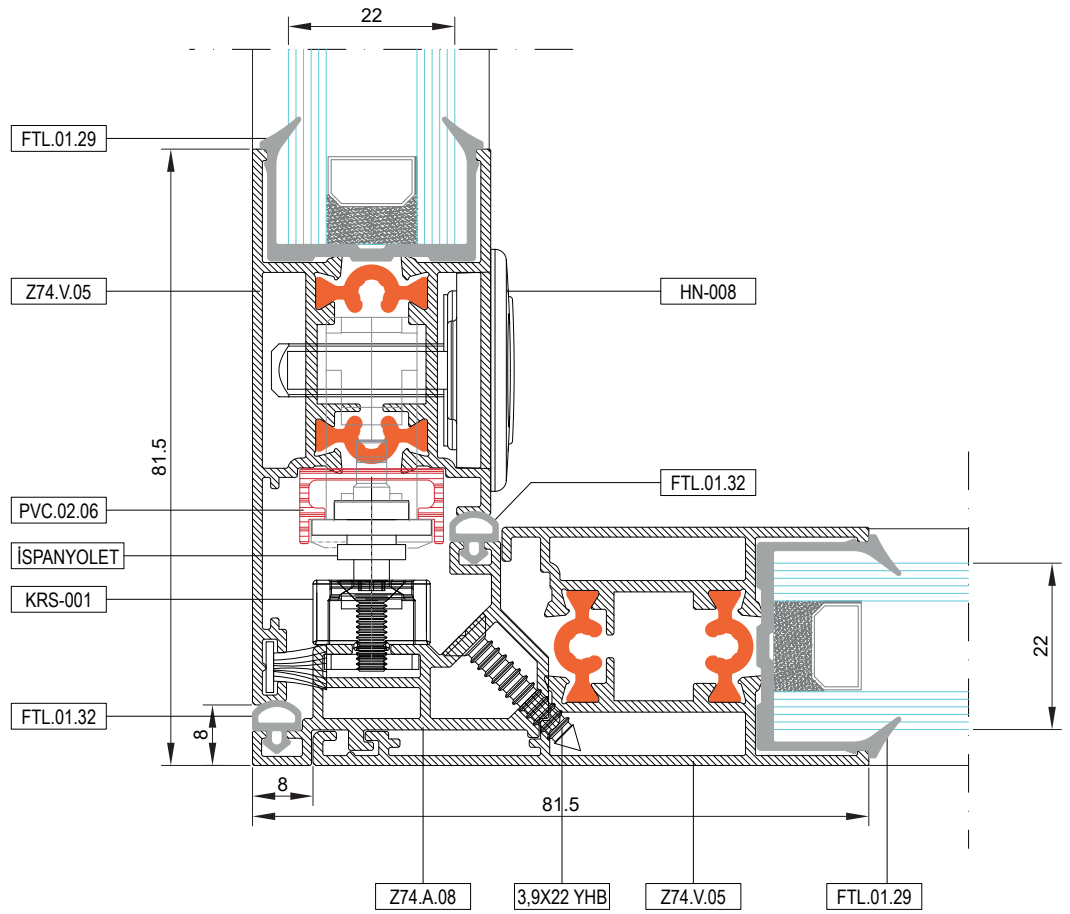


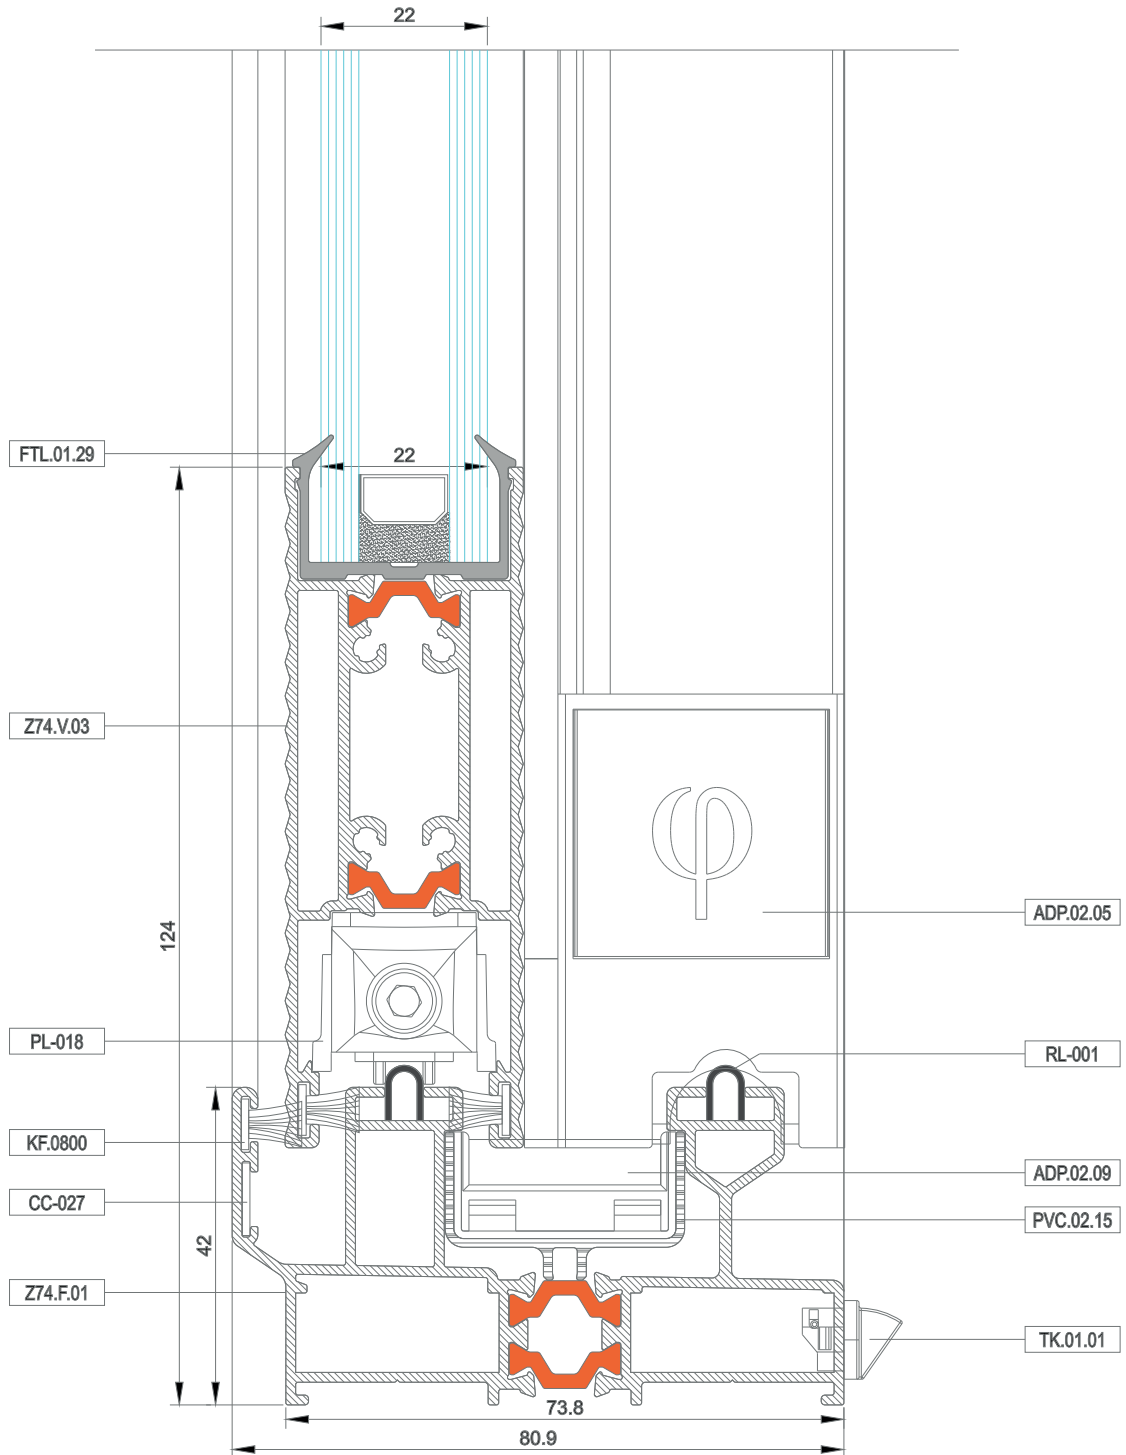



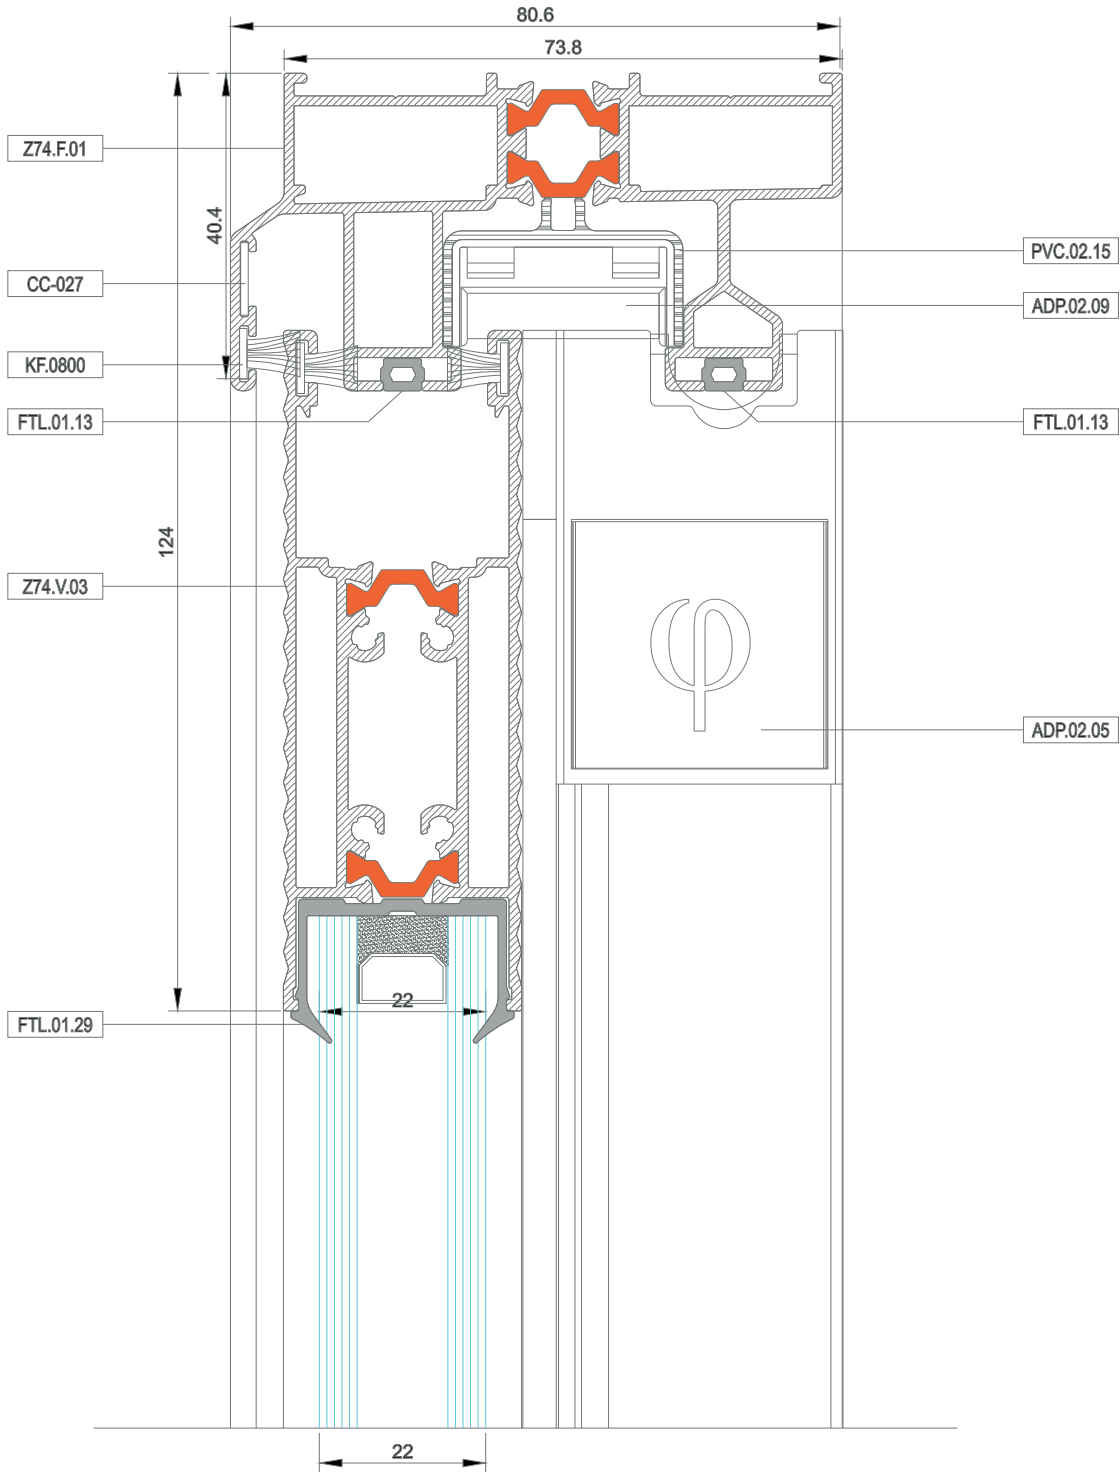


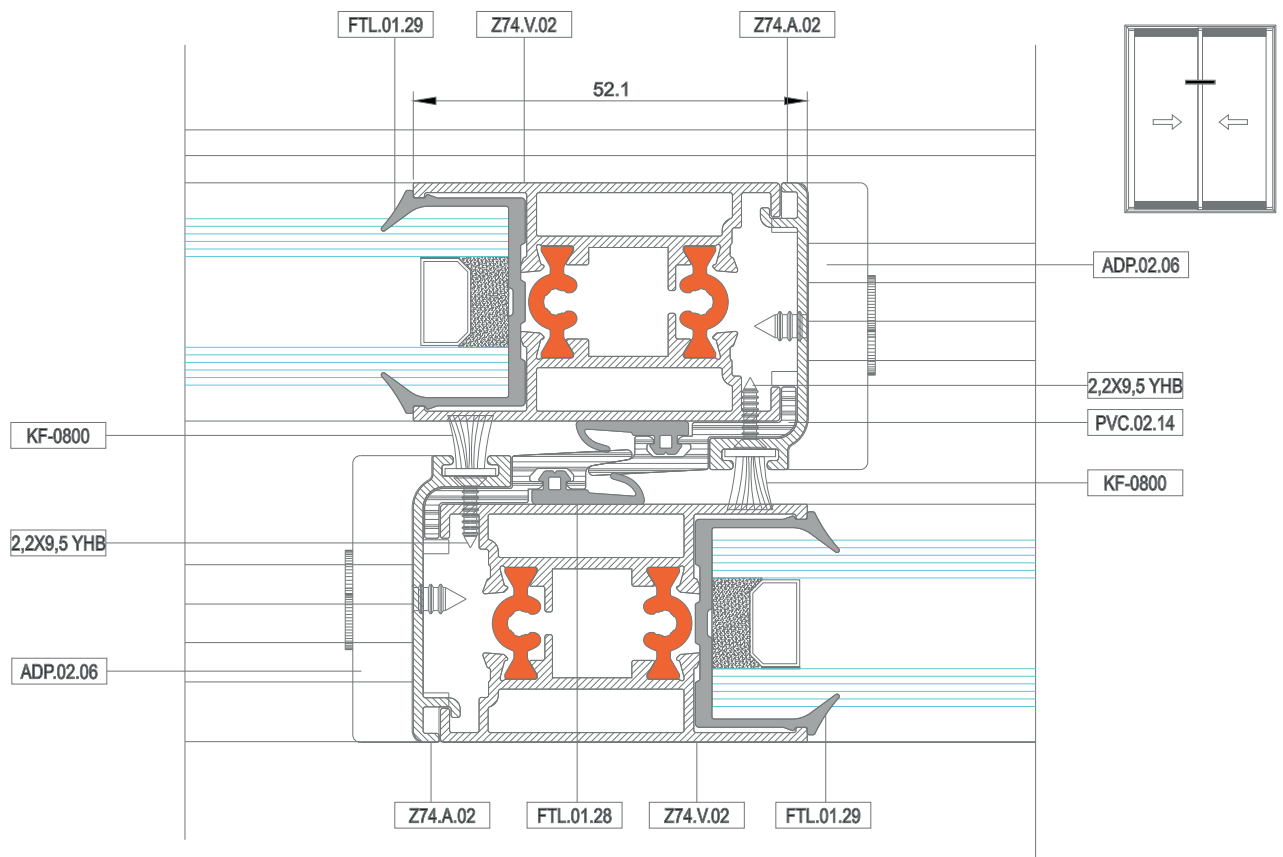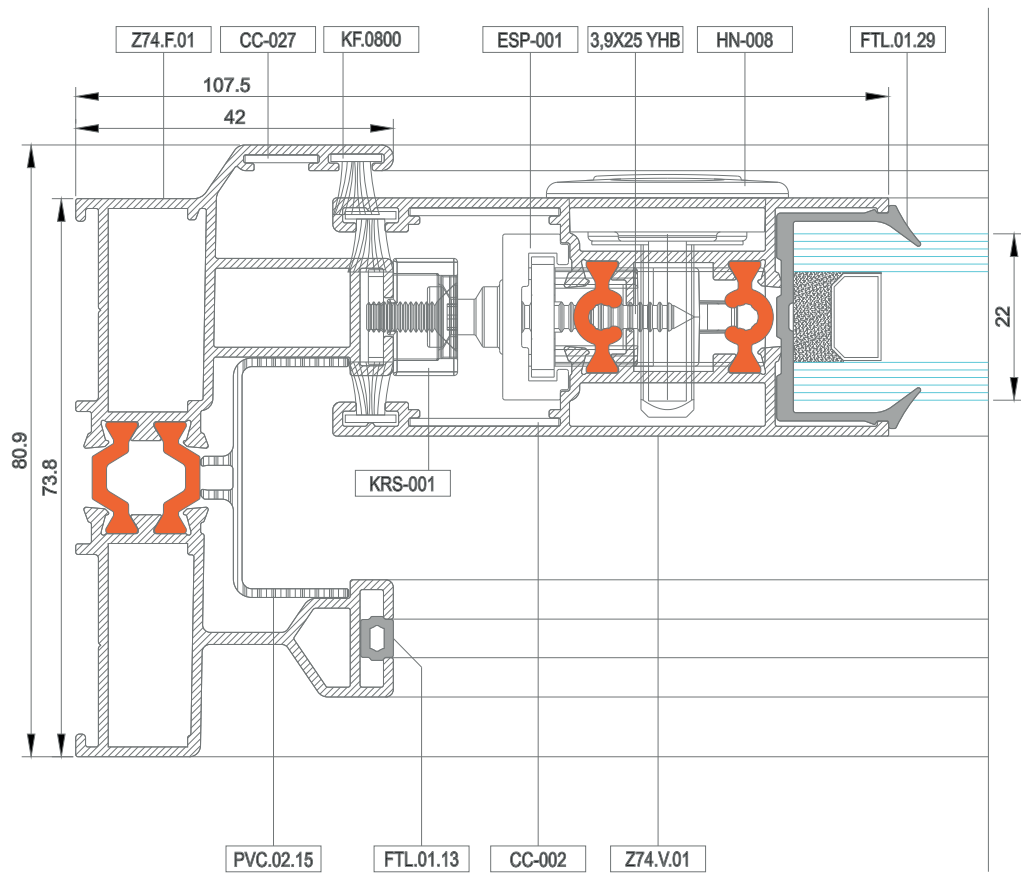


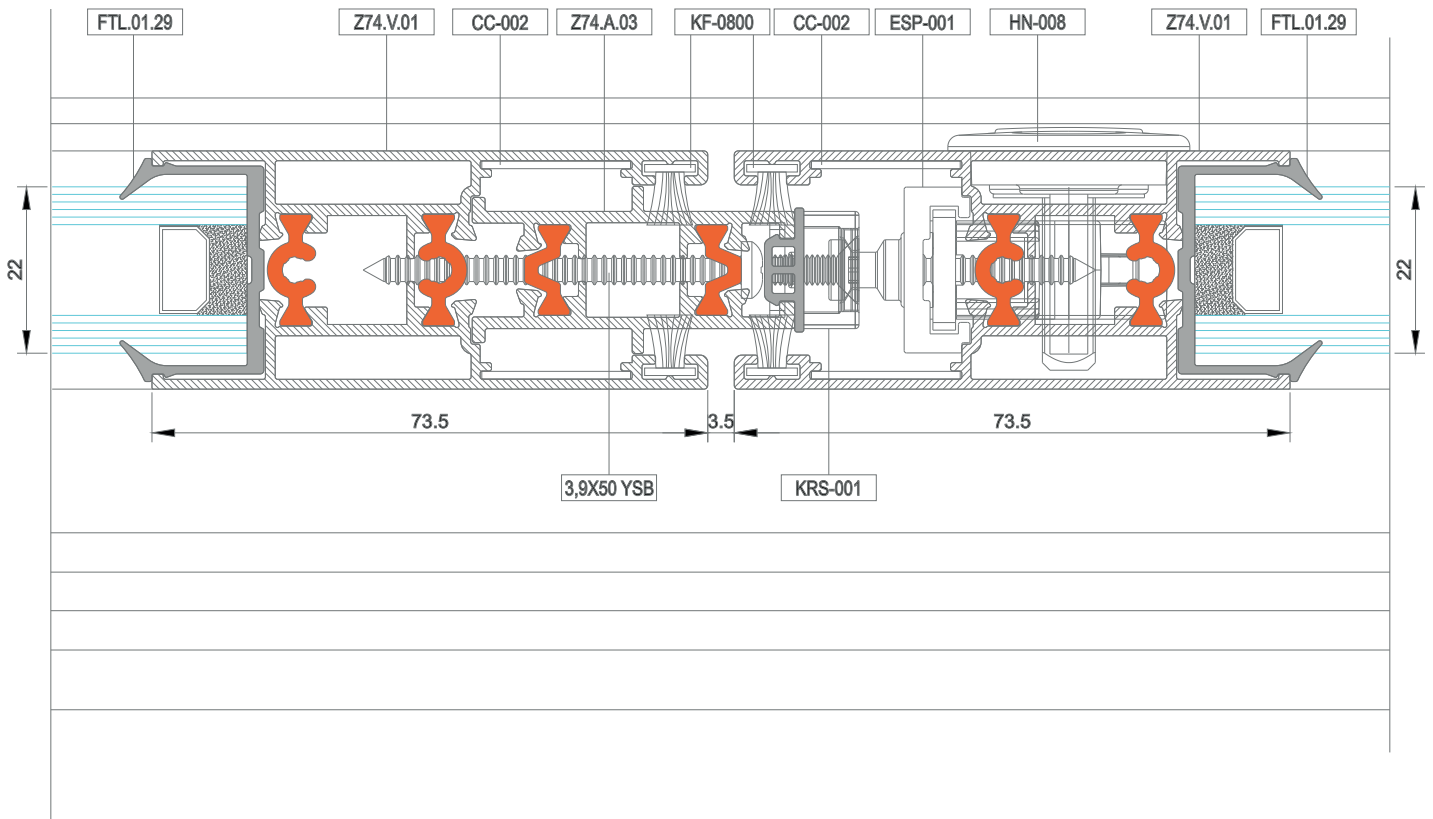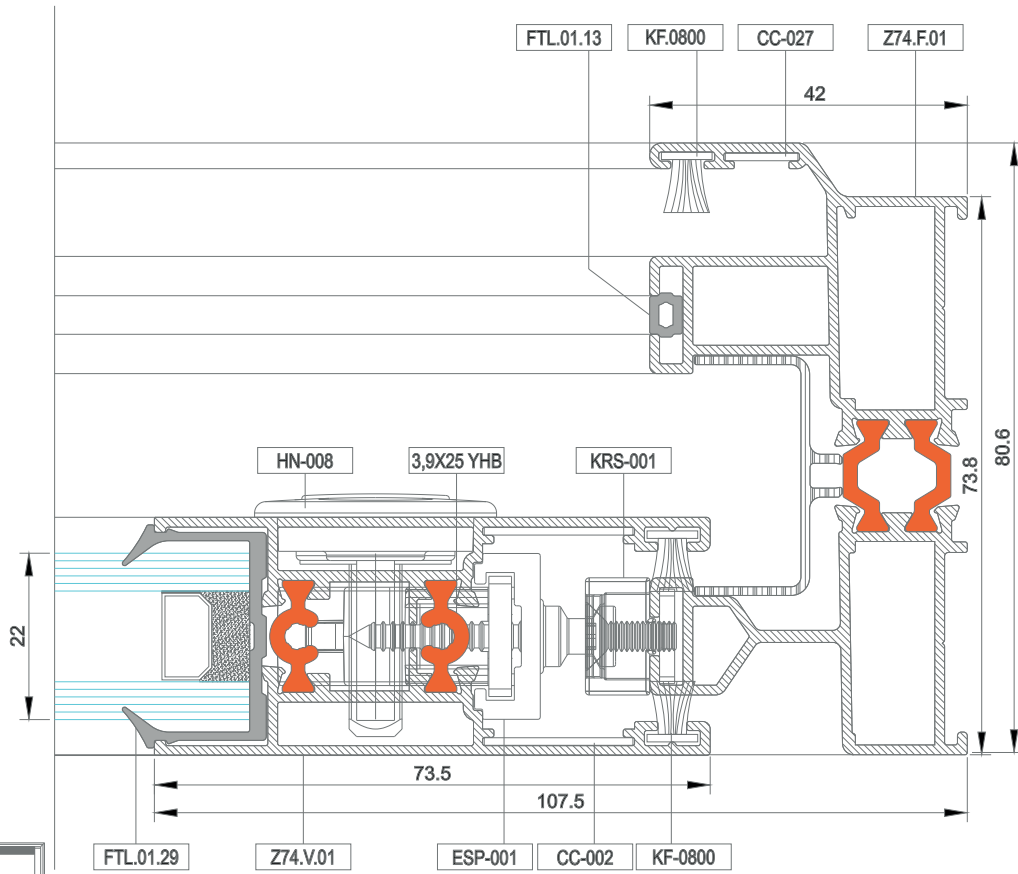

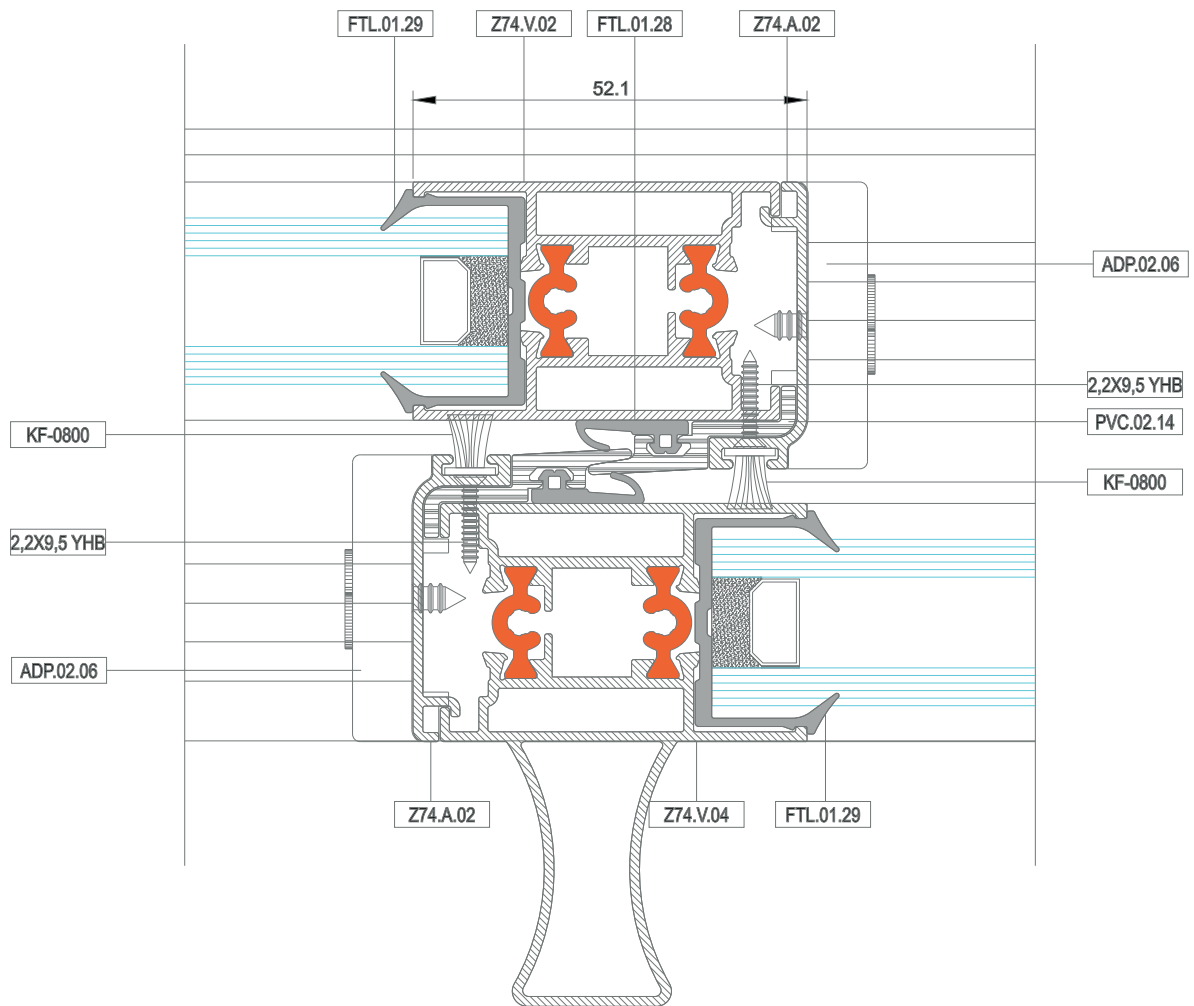


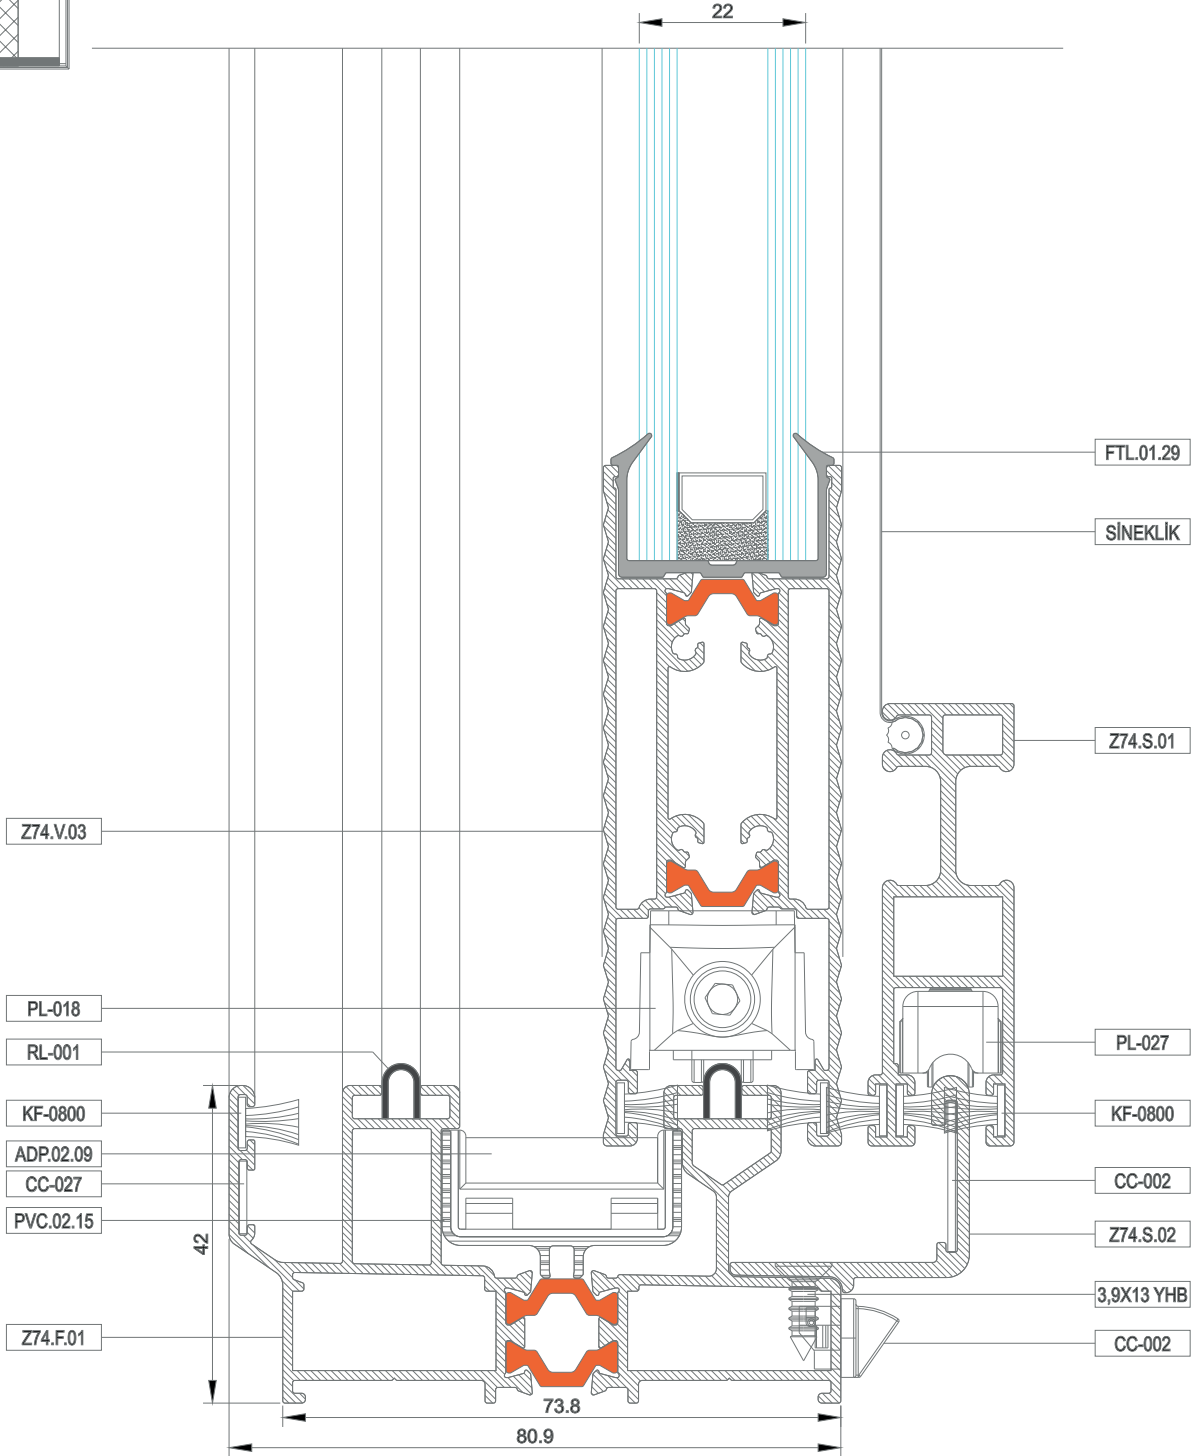


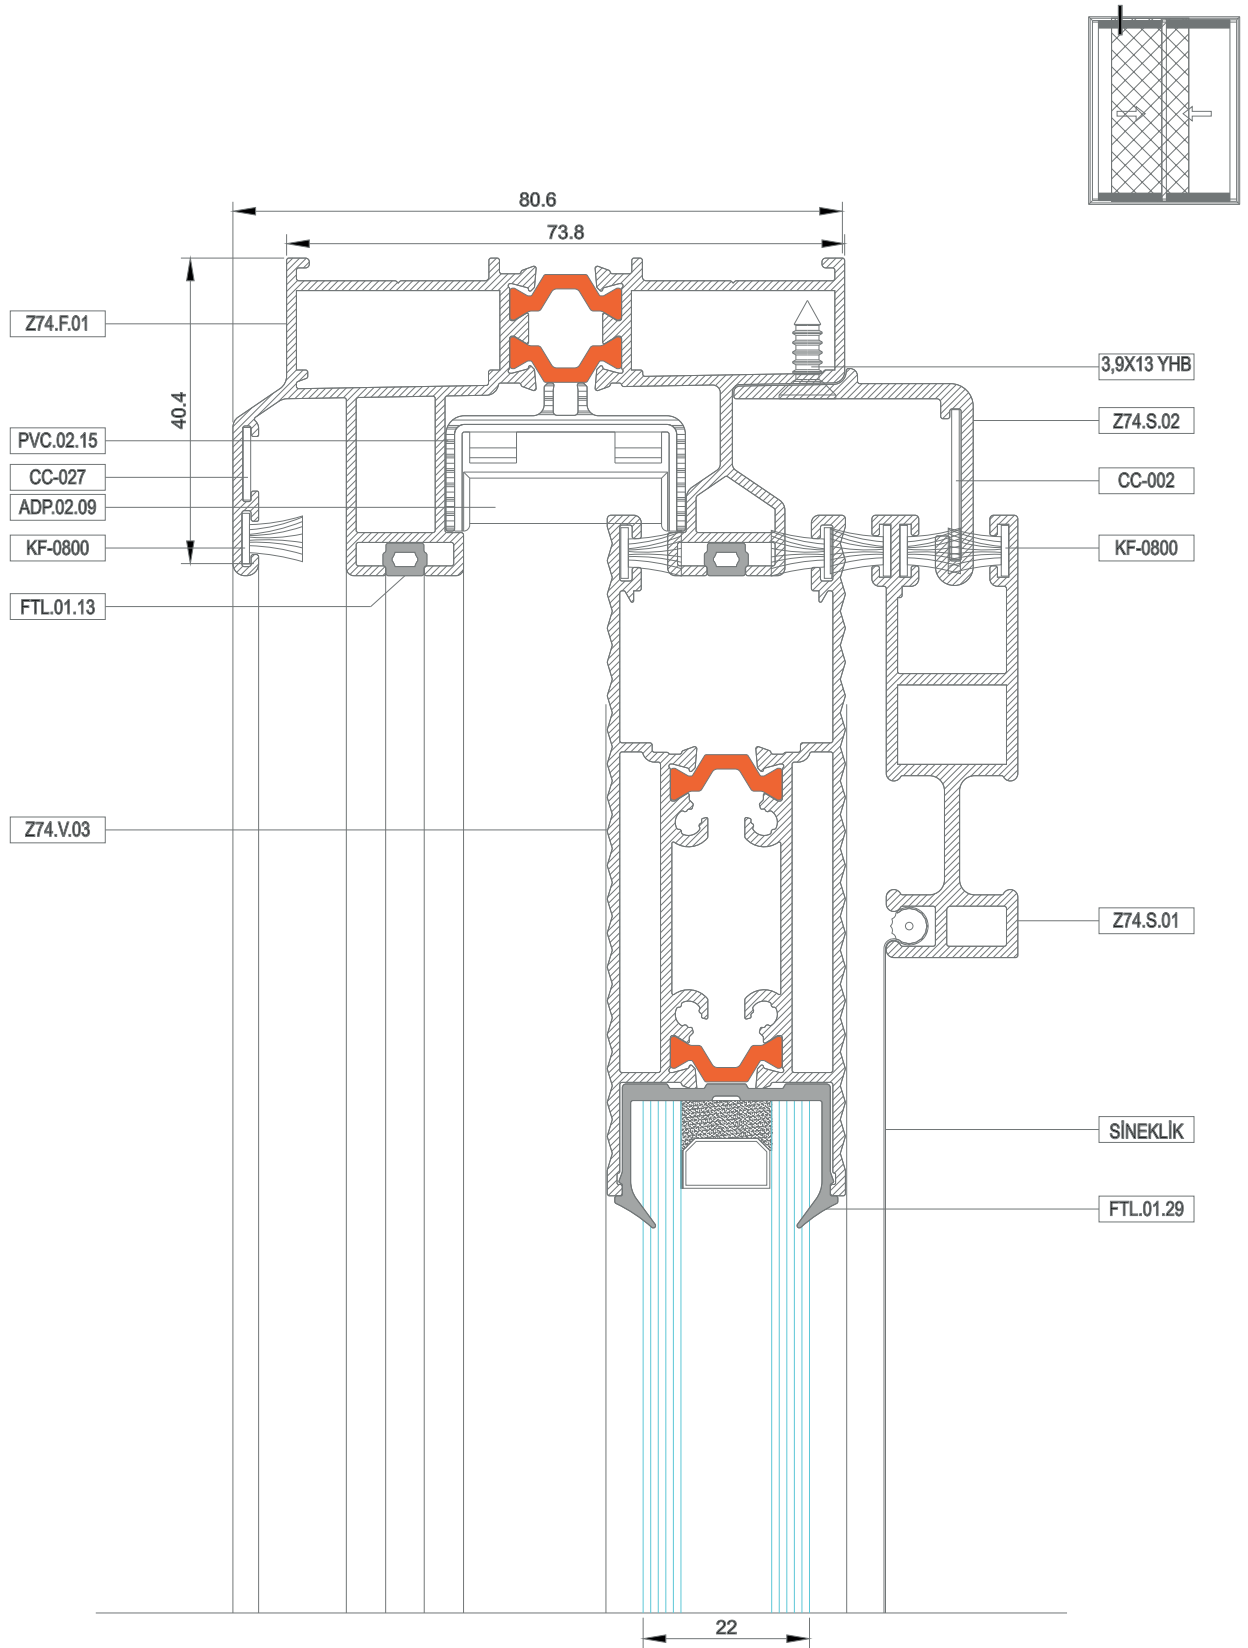





PVC KOL DETAYI

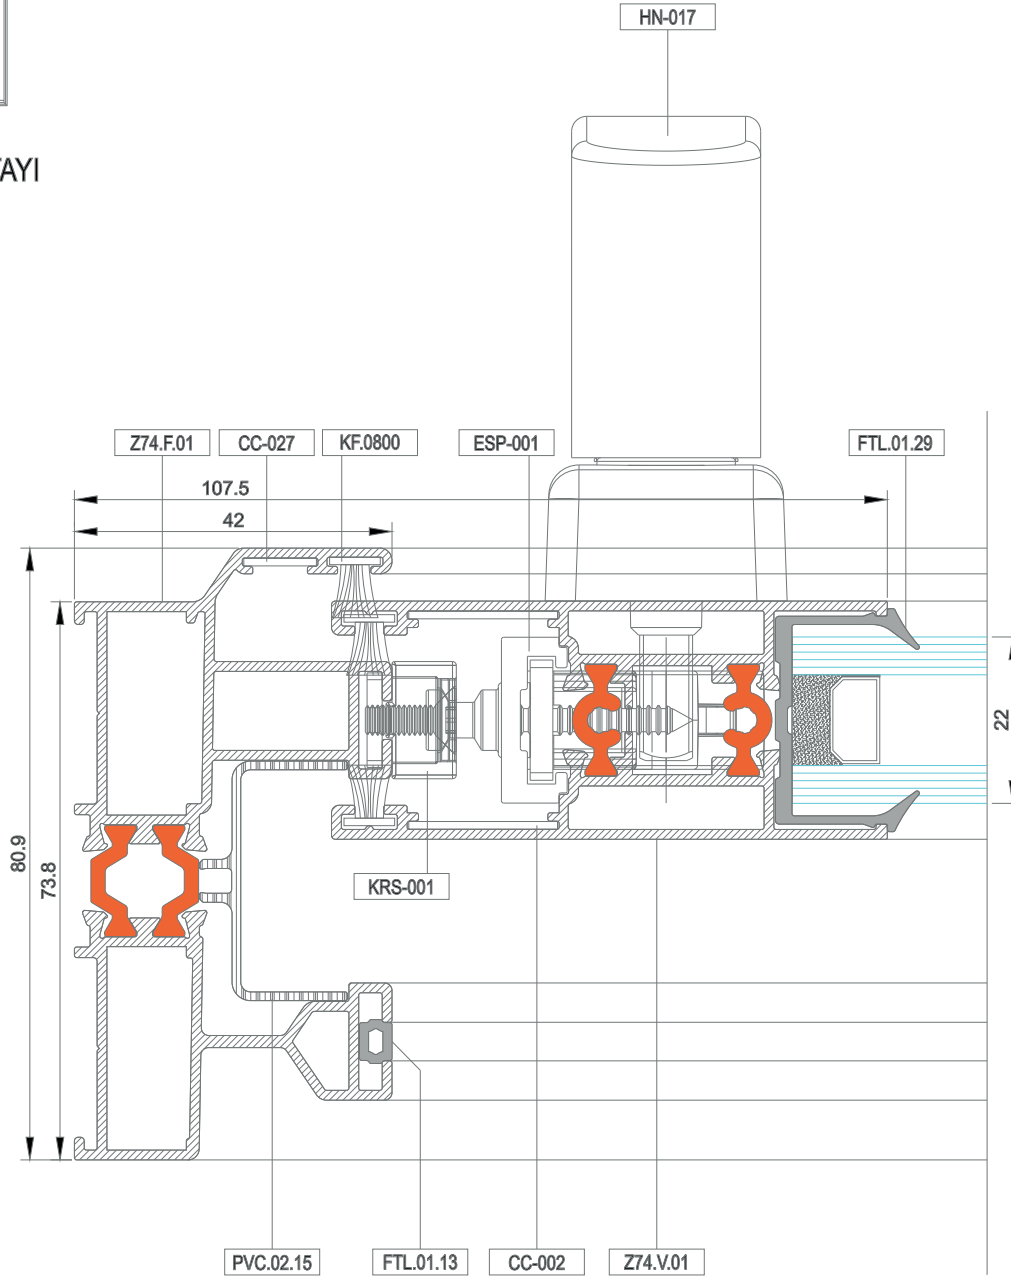





KİLİTLİ KAPI DETAYI

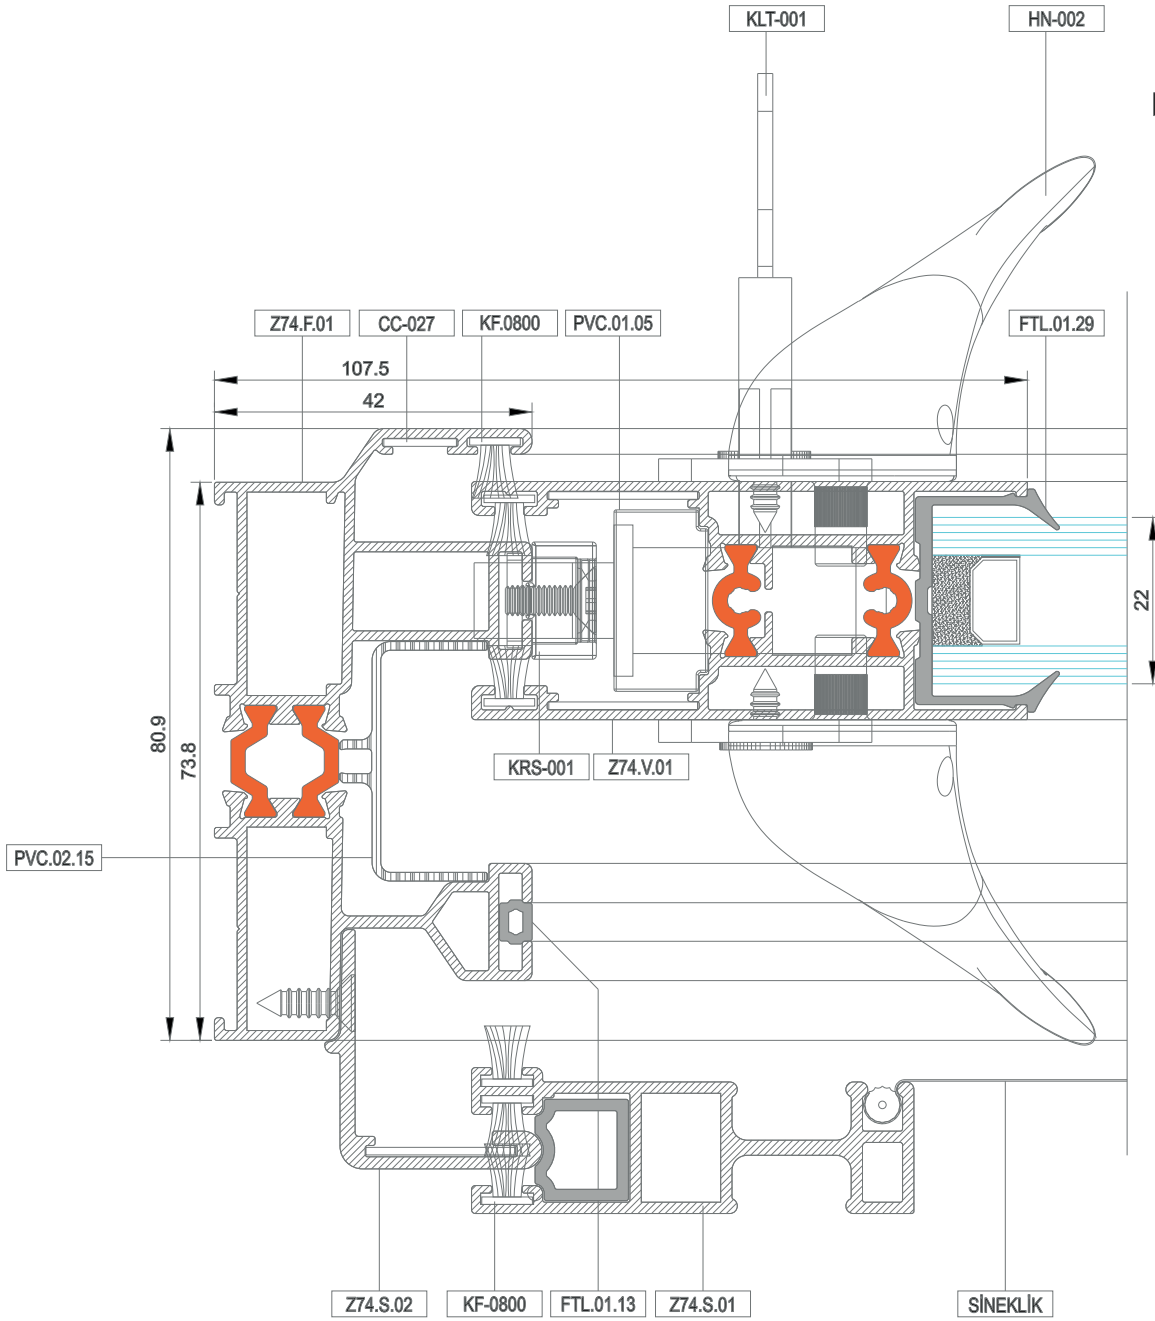







HAVUZ KİLİT DETAYI


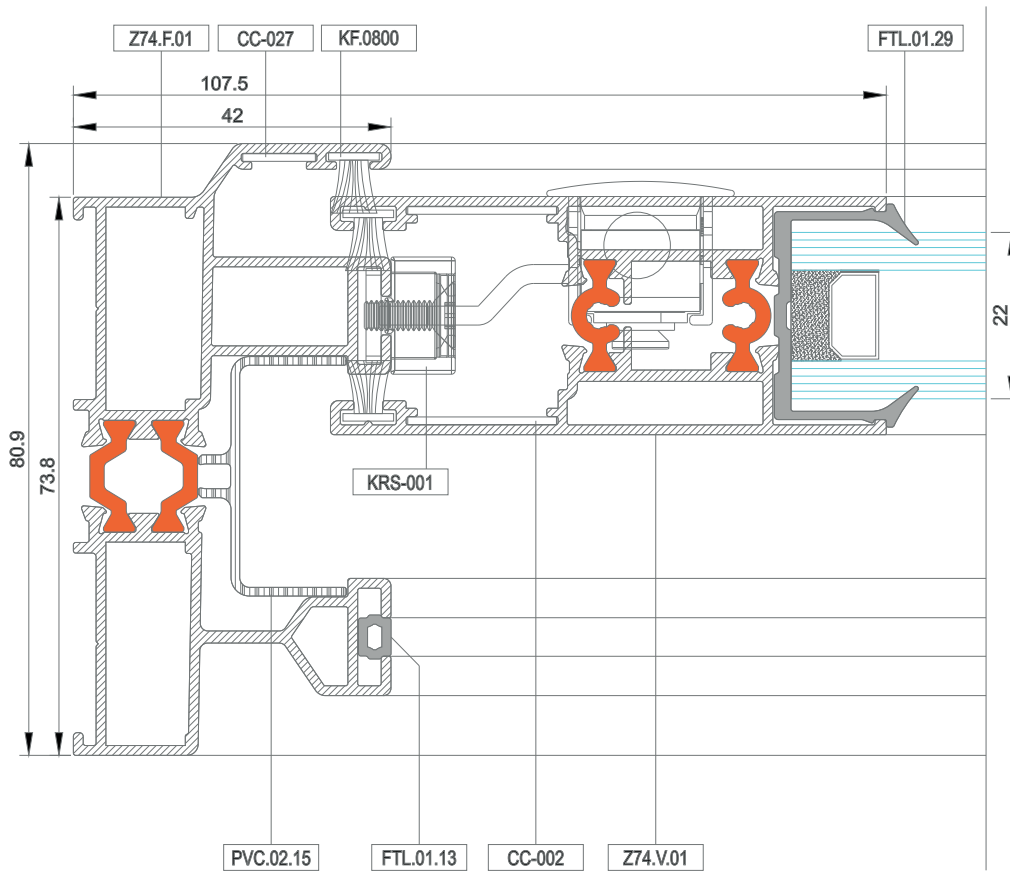










PVC İSPANYOLET DETAYI


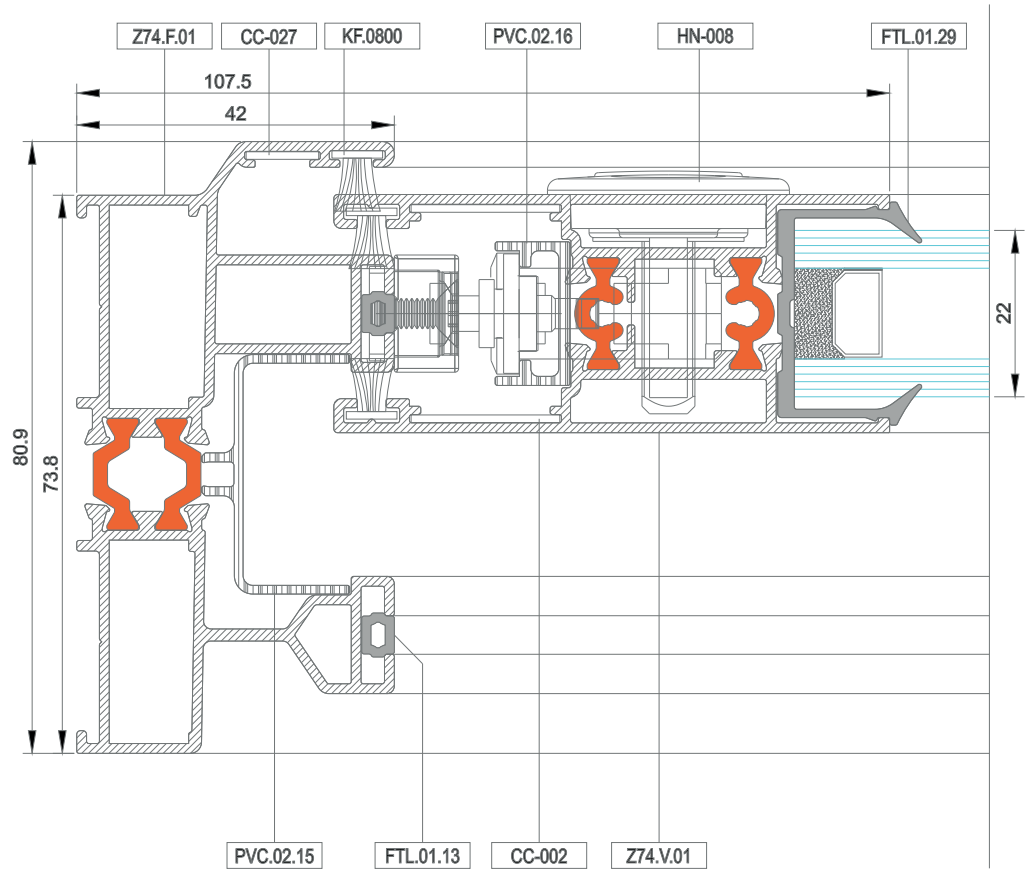


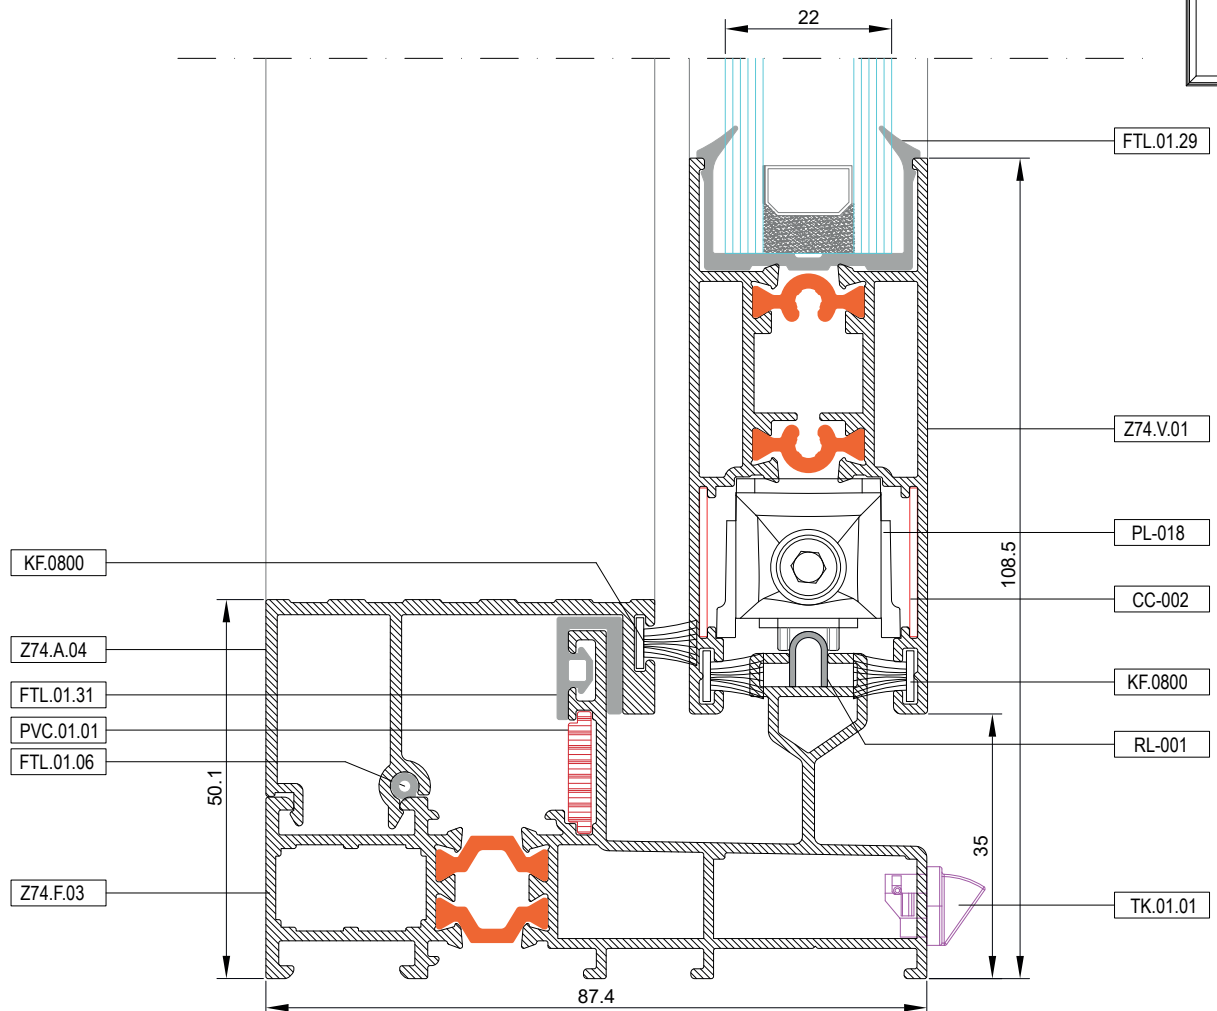
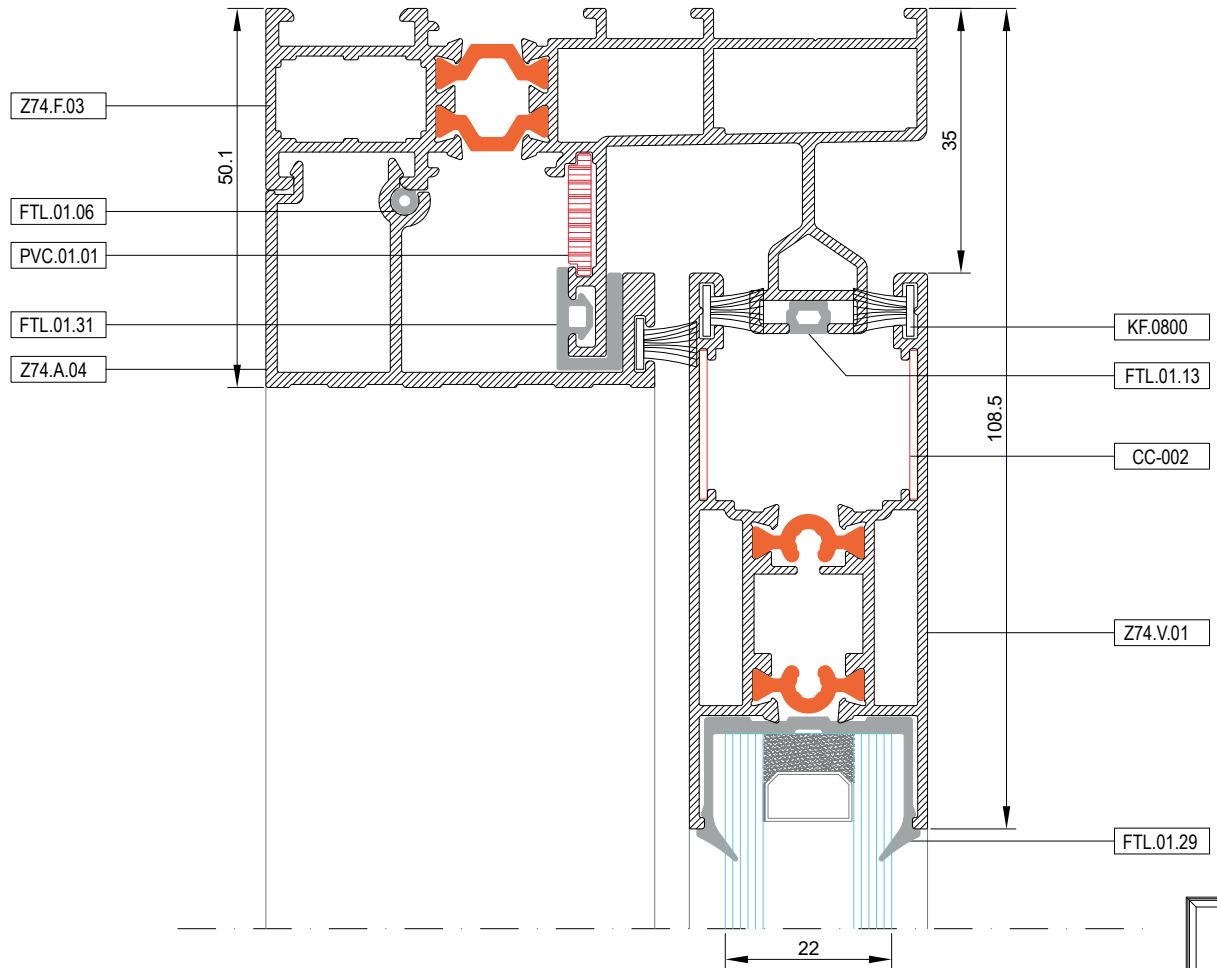


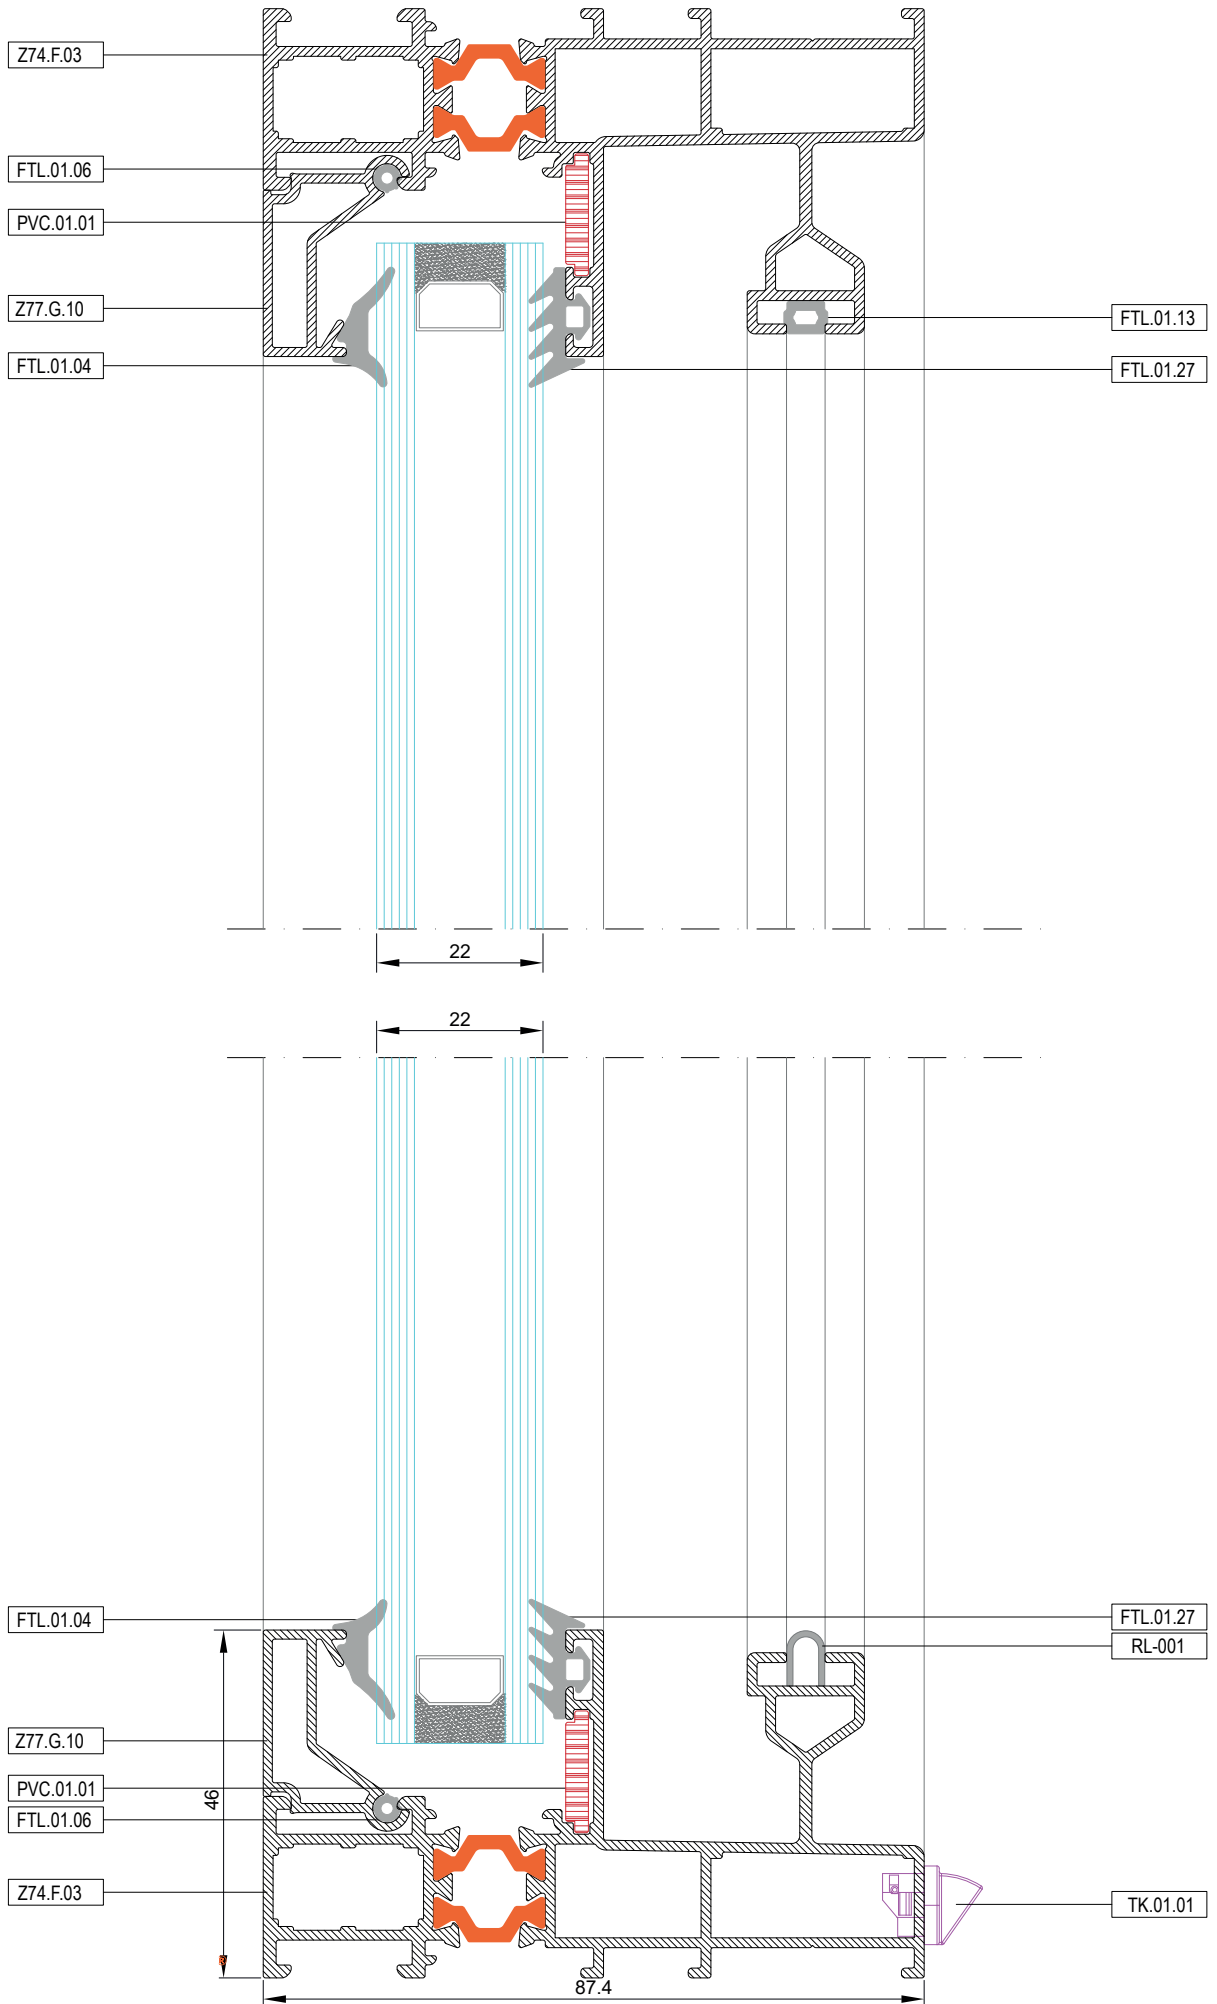


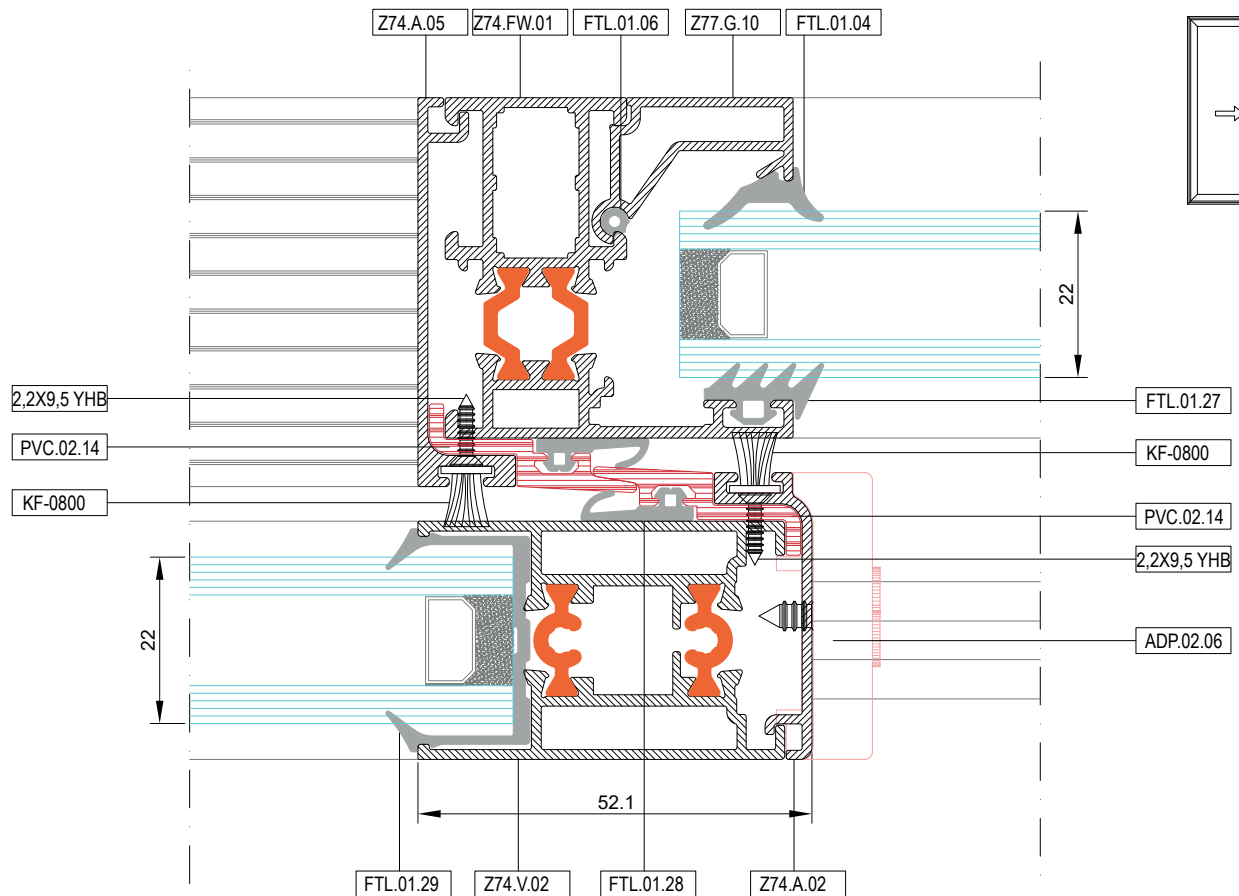
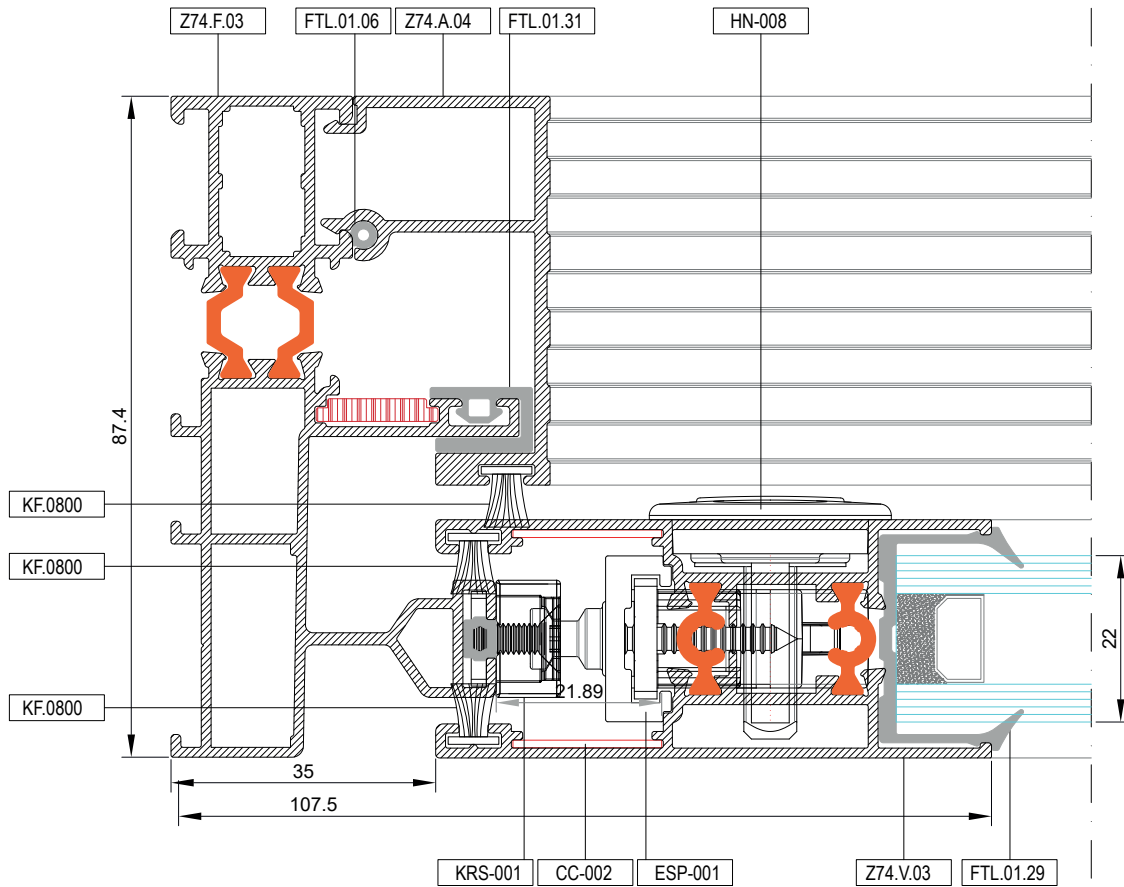


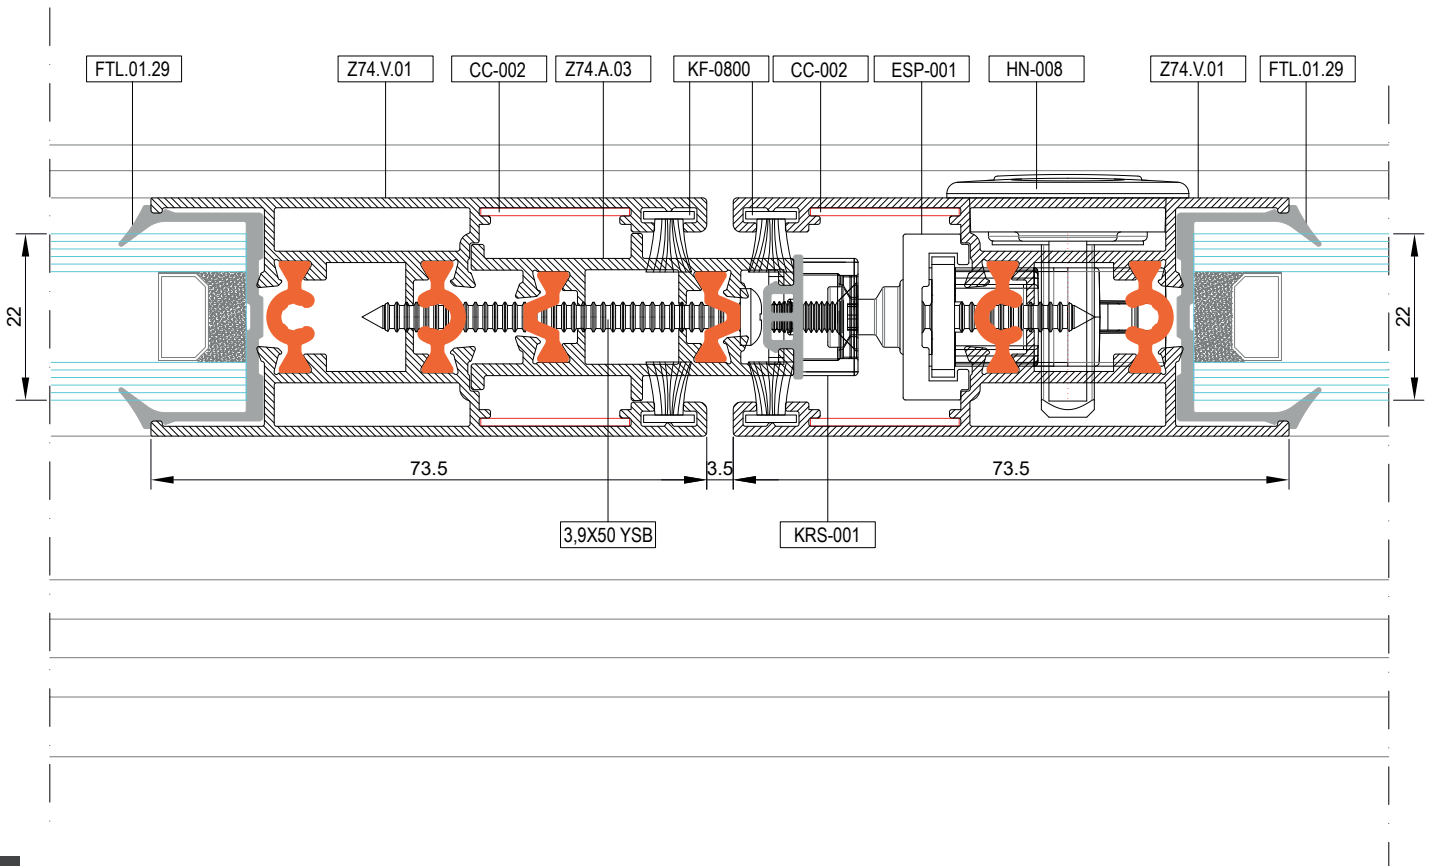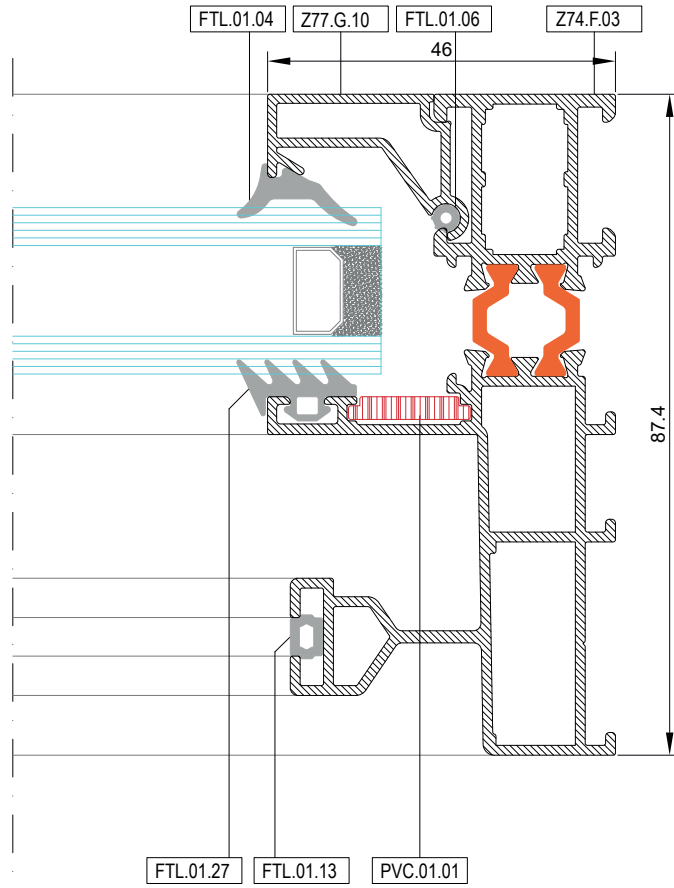



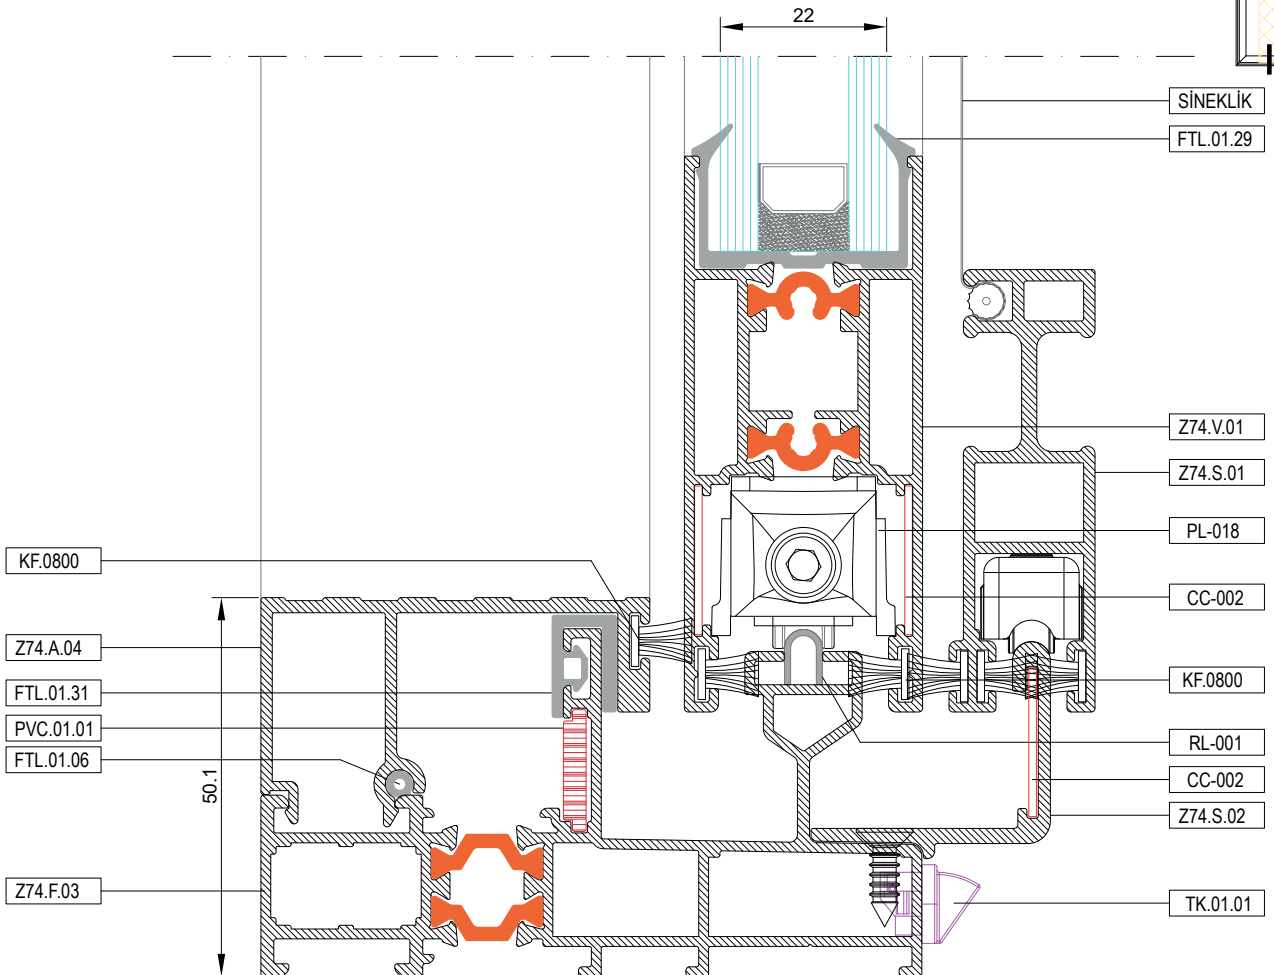
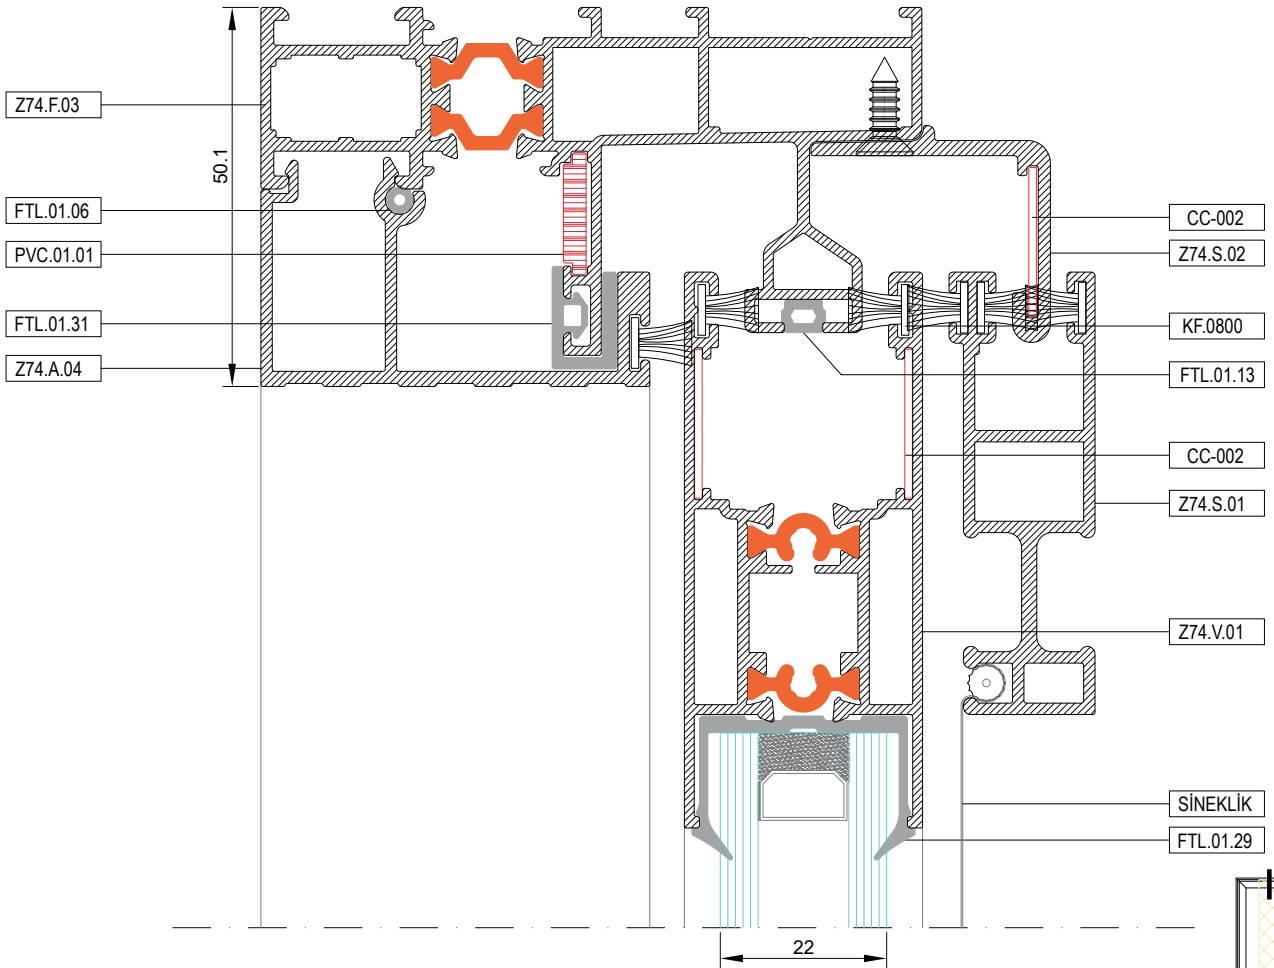


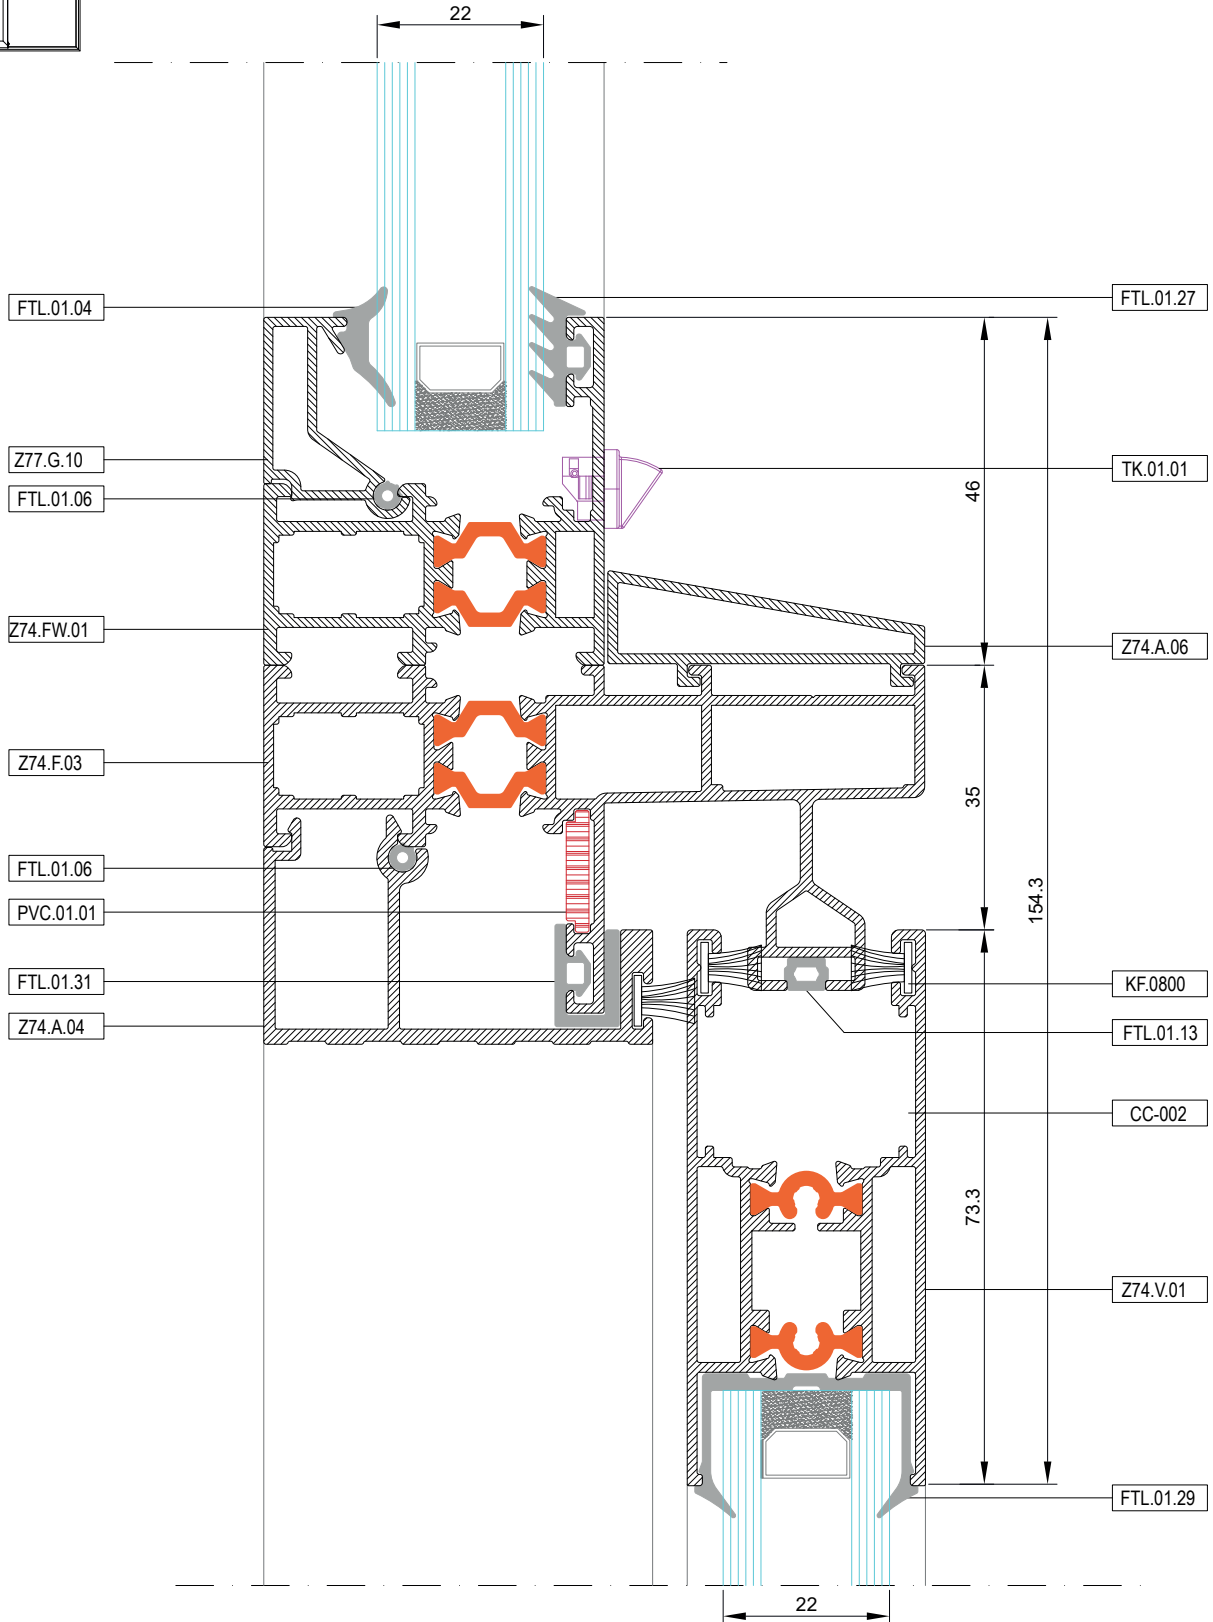


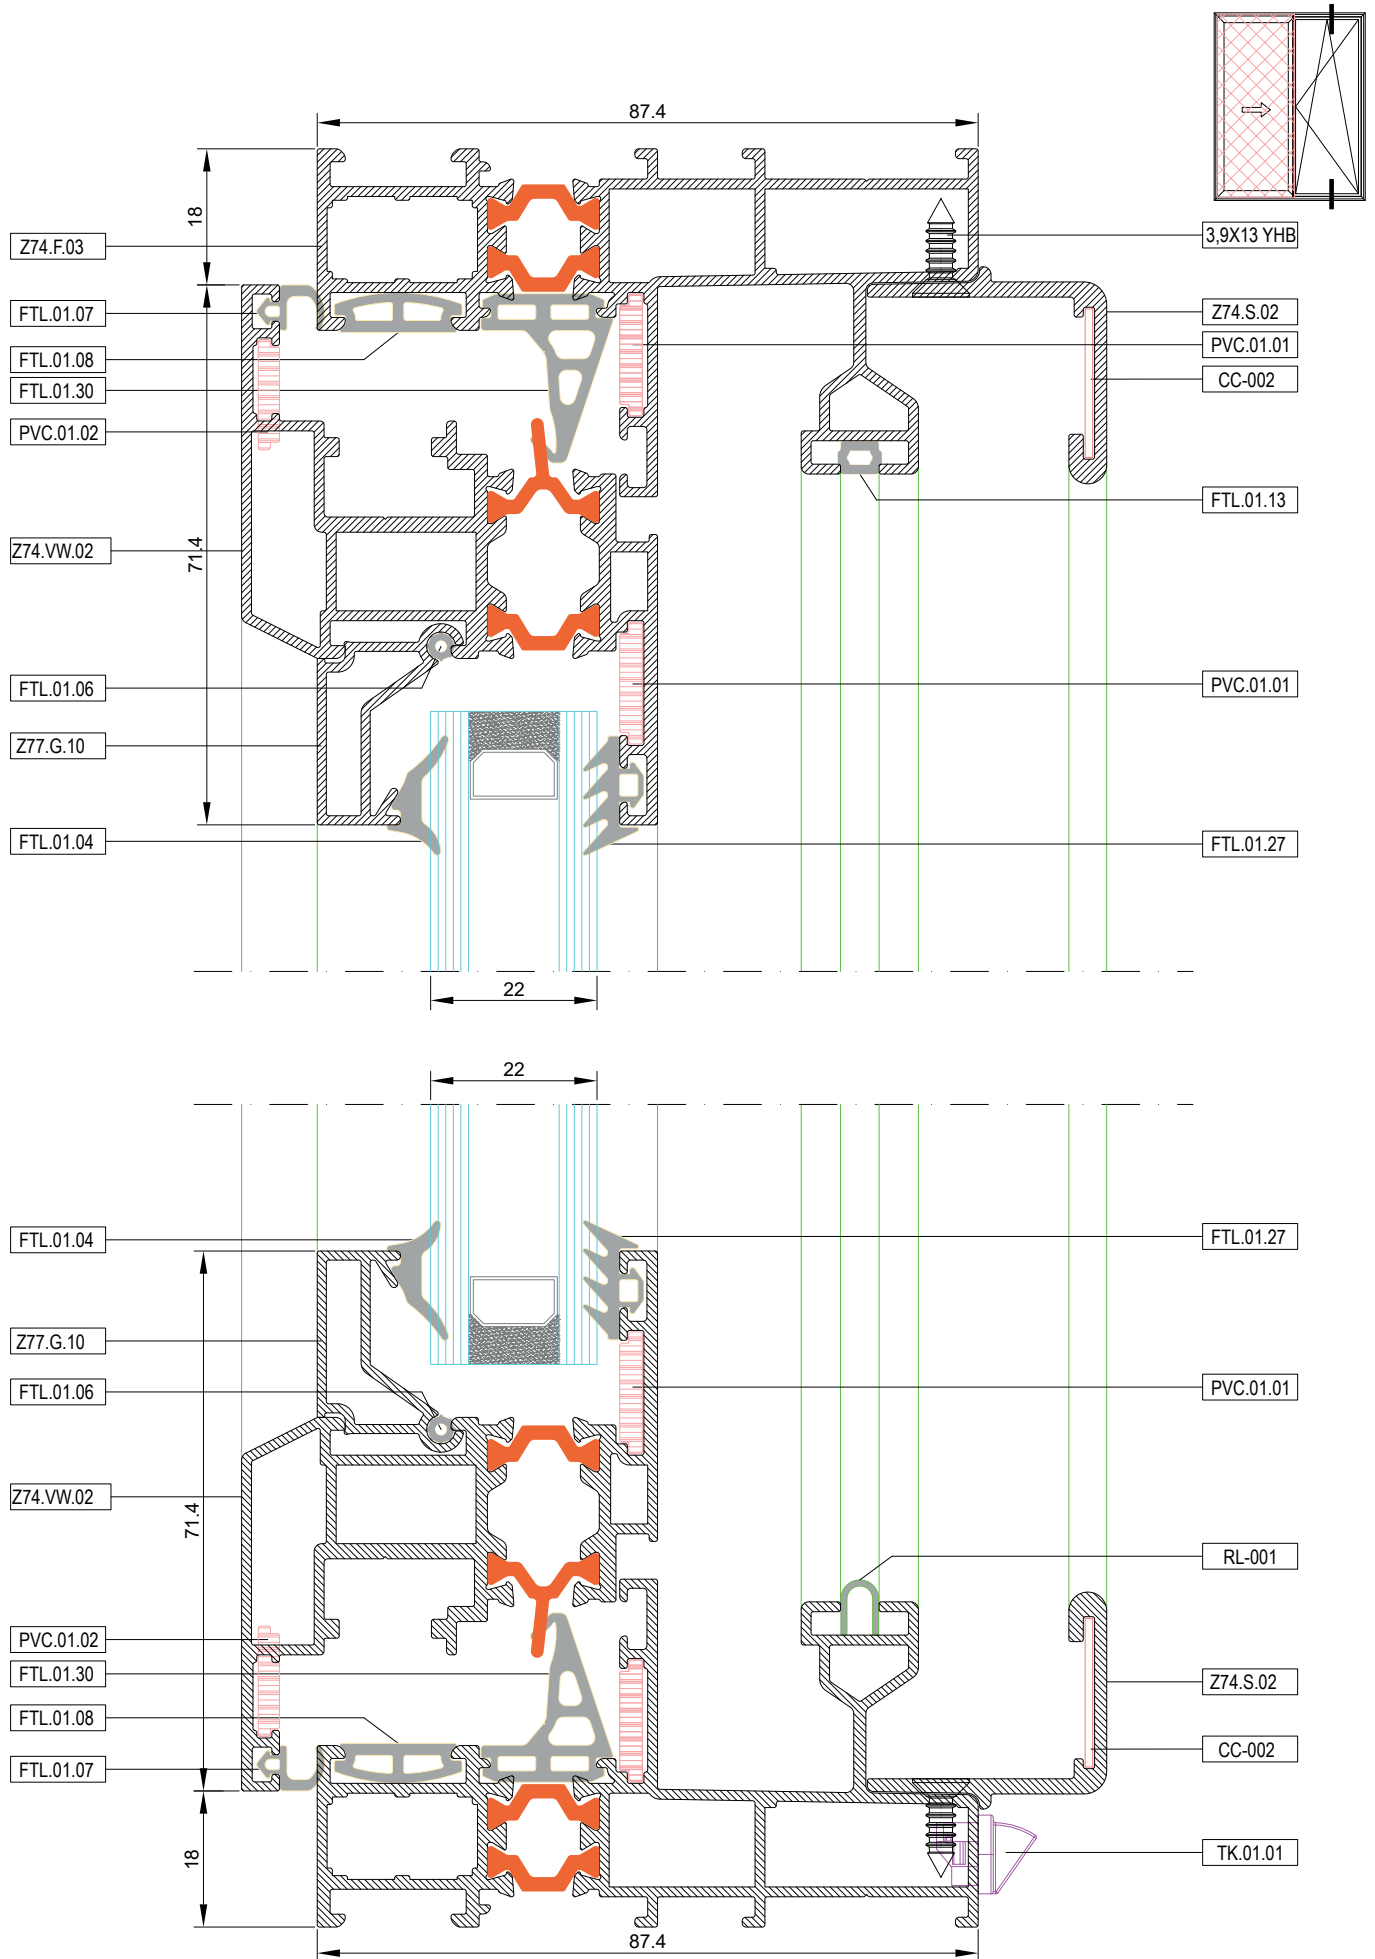

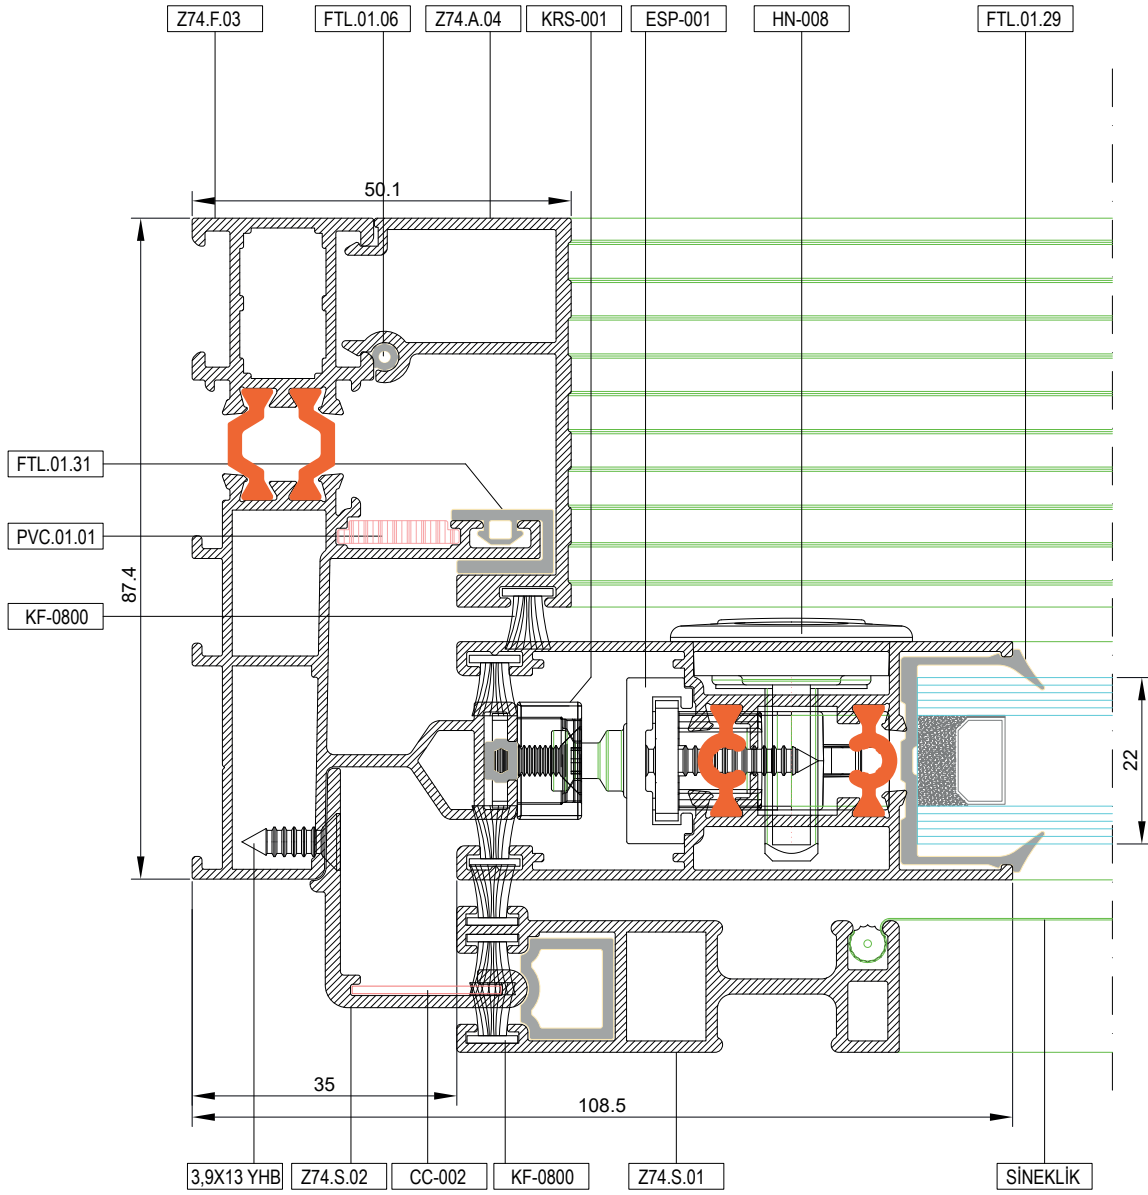

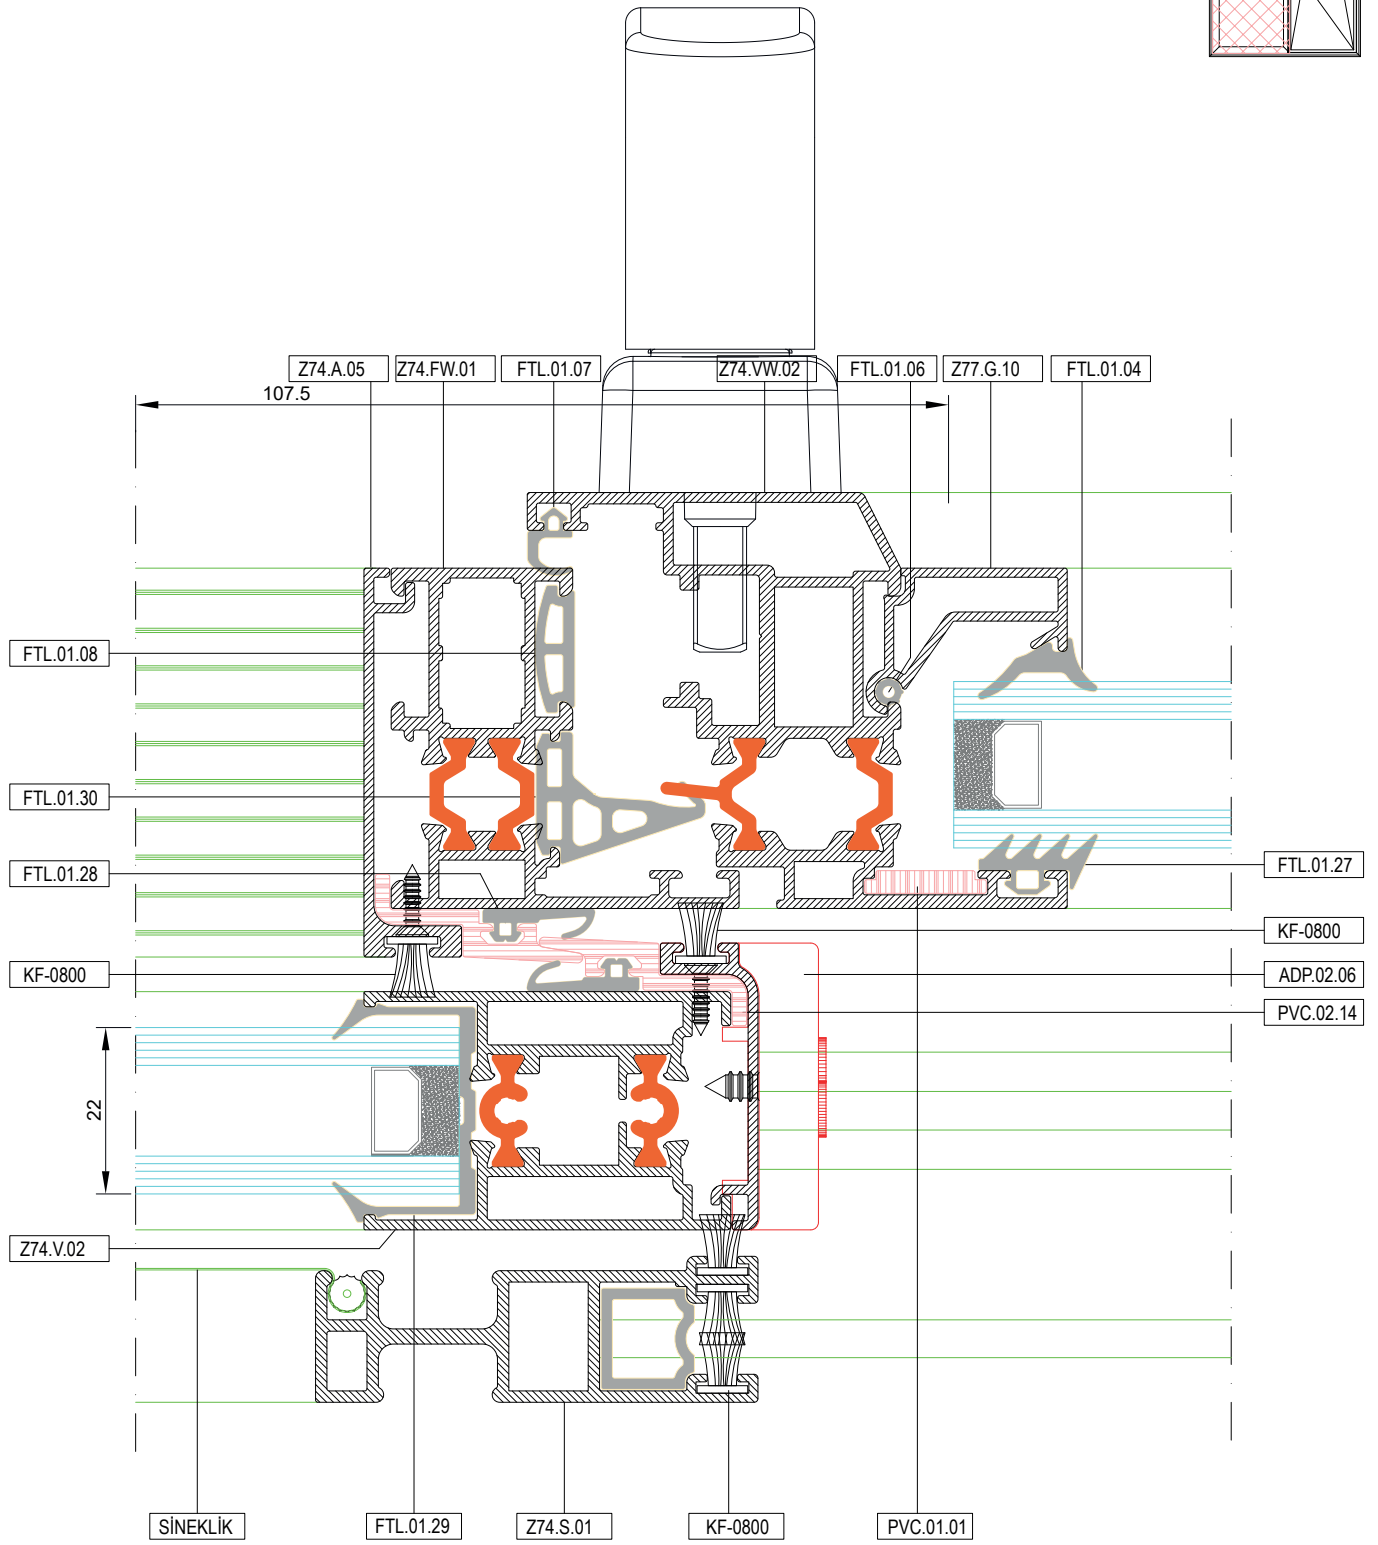

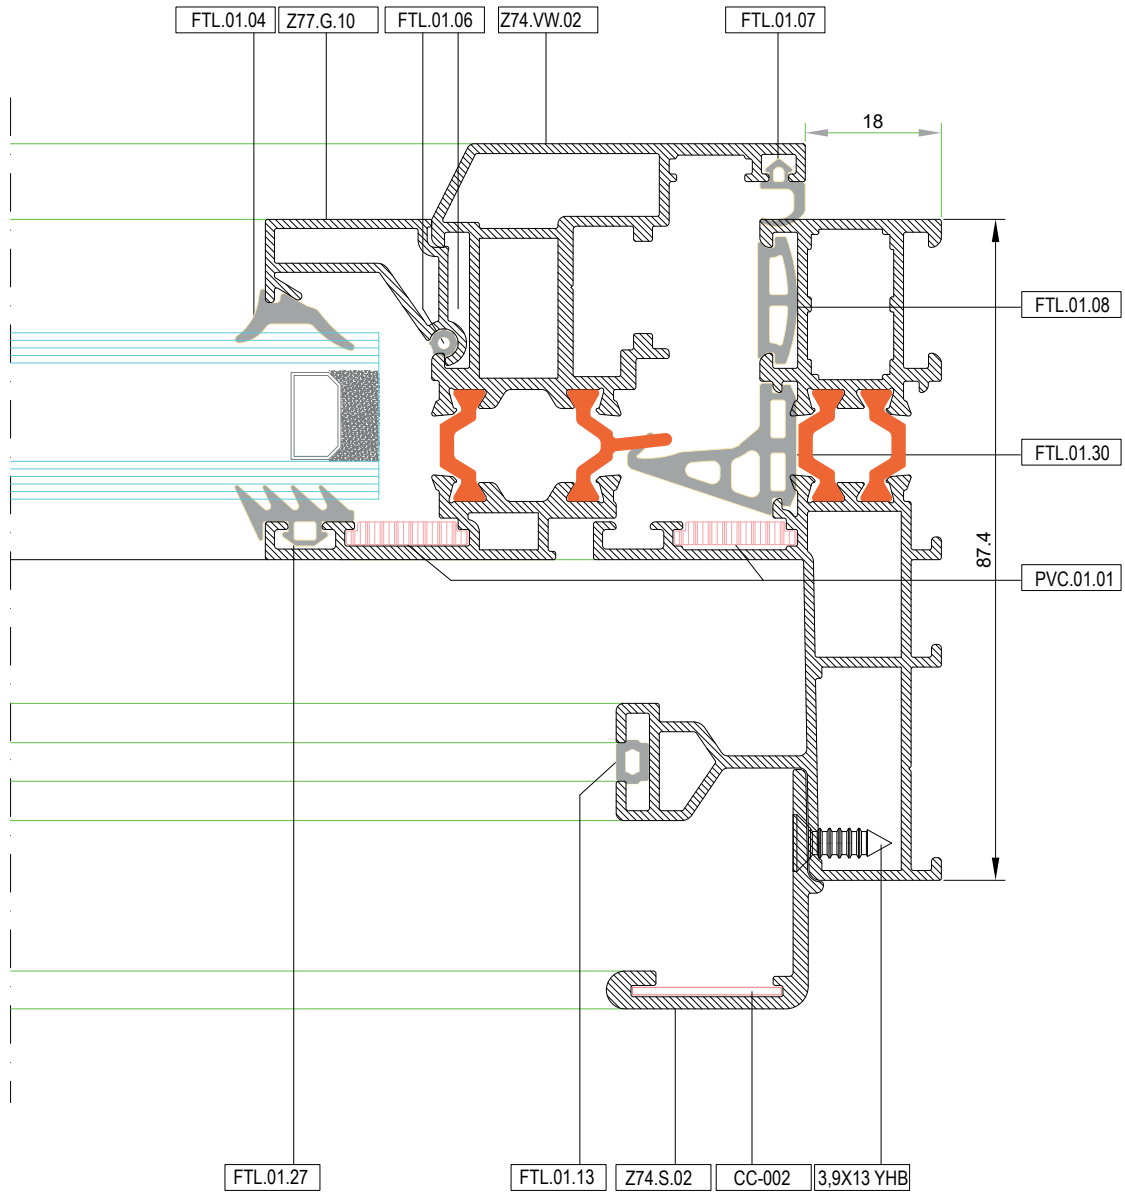



90° KÖŞE DETAYI

