




E-60



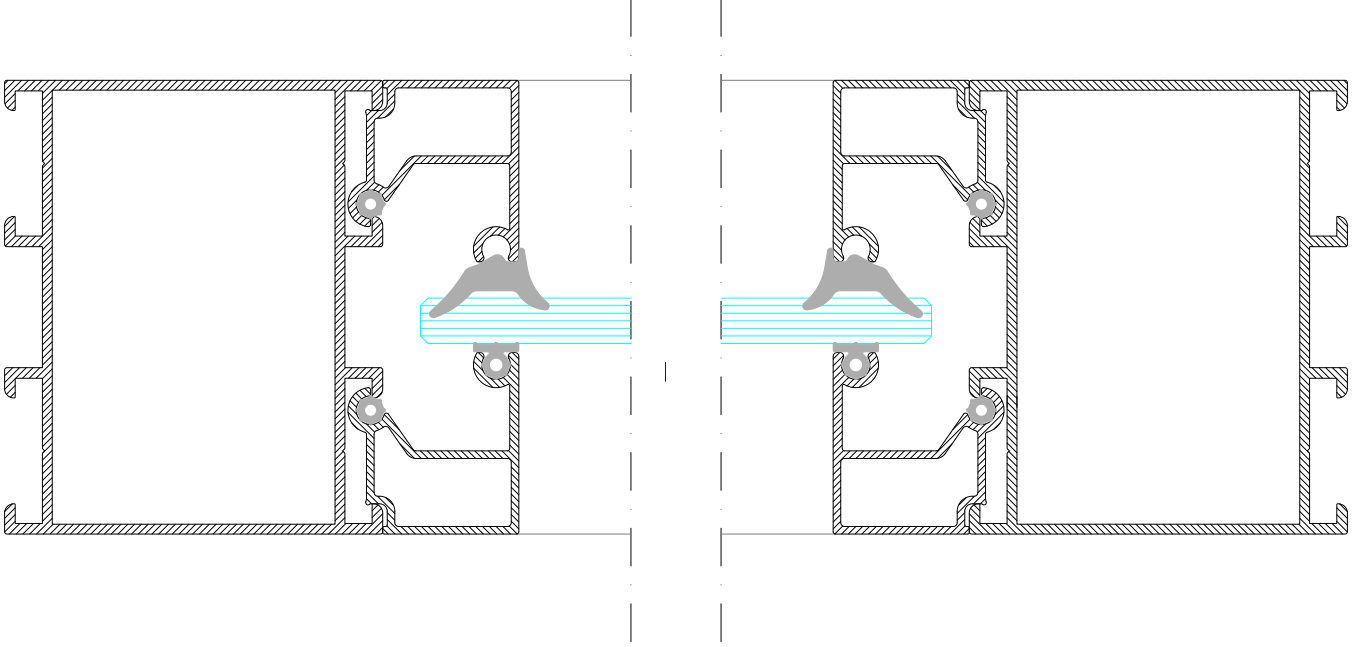

KASA DERİNLİĞİ / FRAME DEPTH

60 mm

KANAT DERİNLİĞİ / VENT DEPTH

60 mm


PROFİL ET KALINLIĞI / PROFILE WALL THICKNESS

1,3 mm



CAM KALINLIĞI / GLASS THICKNESS

12mm - 26 mm


| Z60.F.01 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|-----------------------------------------------------------------------------------|
|          | 0,697                           | 6                            | EN AW6060 T6                 |                                                                                   |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                      |
|          | 10,084                          | 0,859                        | 3,361                        | 0,859                                                                             |

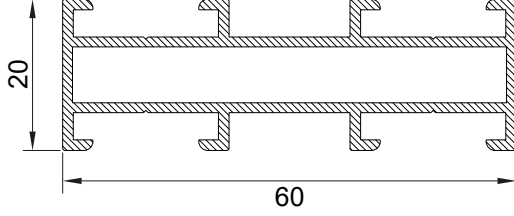


| Z60.F.02 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|-------------------------------------------------------------------------------------|
|          | 0,909                           | 6                            | EN AW6060 T6                 |                                                                                     |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                        |
|          | 16,804                          | 11,367                       | 5,601                        | 4,547                                                                               |

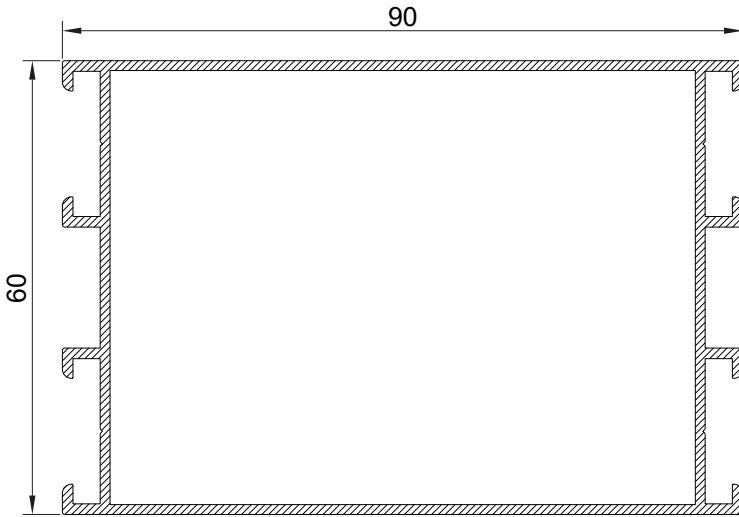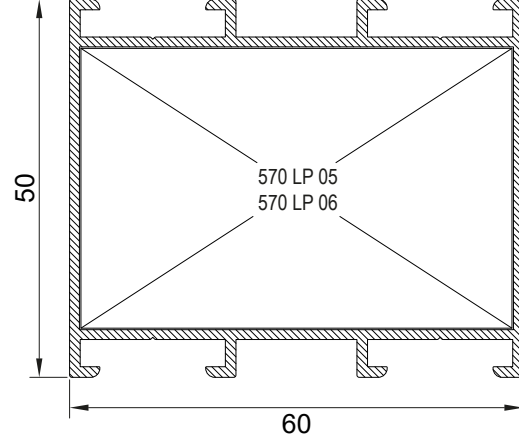


| Z60.F.03 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|---------------------------------------------------------------------------------------|
|          | 1,191                           | 6                            | EN AW6060 T6                 |                                                                                       |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                          |
|          | 49,457                          | 25,764                       | 10,990                       | 8,588                                                                                 |

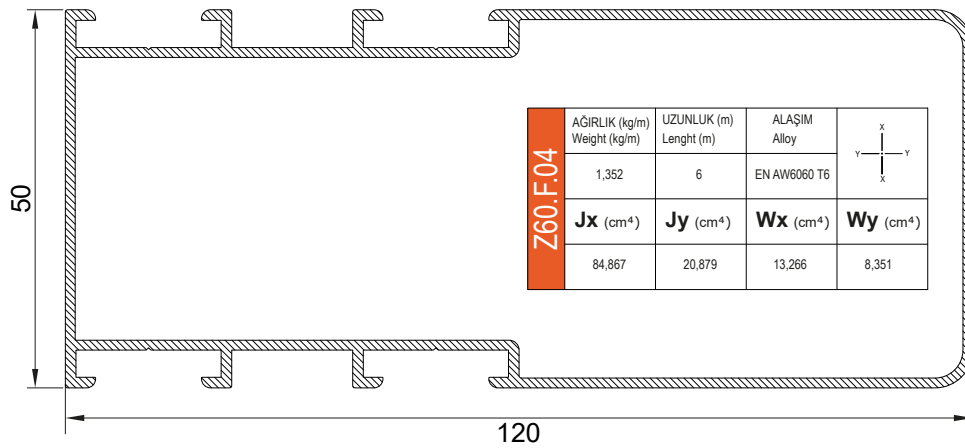


| Z60.F.04 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|---------------------------------------------------------------------------------------|
|          | 1,352                           | 6                            | EN AW6060 T6                 |                                                                                       |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                          |
|          | 84,867                          | 20,879                       | 13,266                       | 8,351                                                                                 |

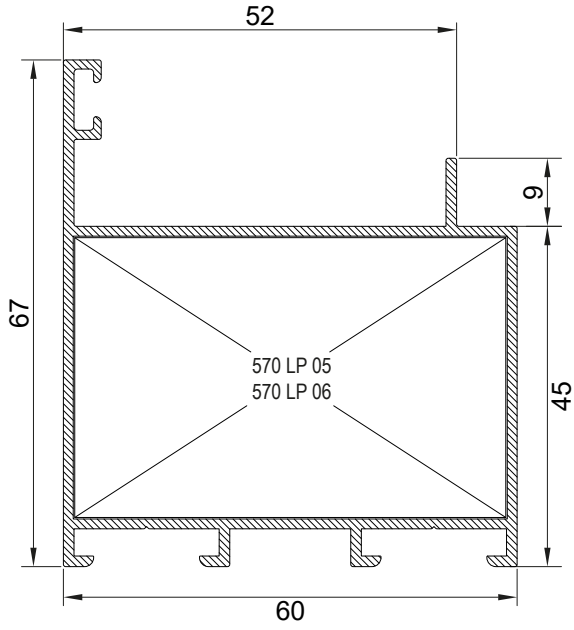

| Z60.V.01 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |                       |
|----------|---------------------------------|---------------------------|-----------------------|-----------------------|
|          | 0,948                           | 6                         | EN AW6060 T6          |                       |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> ) |
|          | 18,738                          | 14,516                    | 5,724                 | 3,645                 |

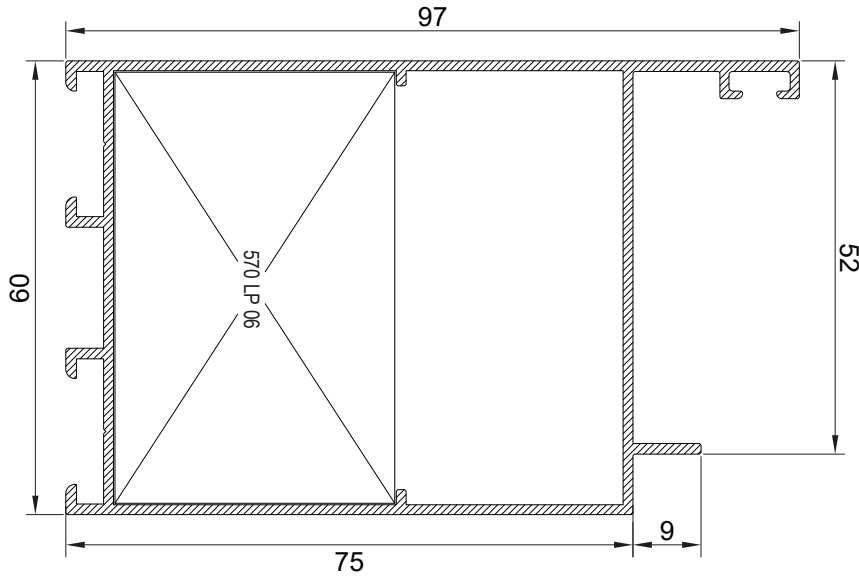


| Z60.V.02 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |                       |
|----------|---------------------------------|---------------------------|-----------------------|-----------------------|
|          | 1,173                           | 6                         | EN AW6060 T6          |                       |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> ) |
|          | 42,671                          | 25,902                    | 7,803                 | 8,041                 |


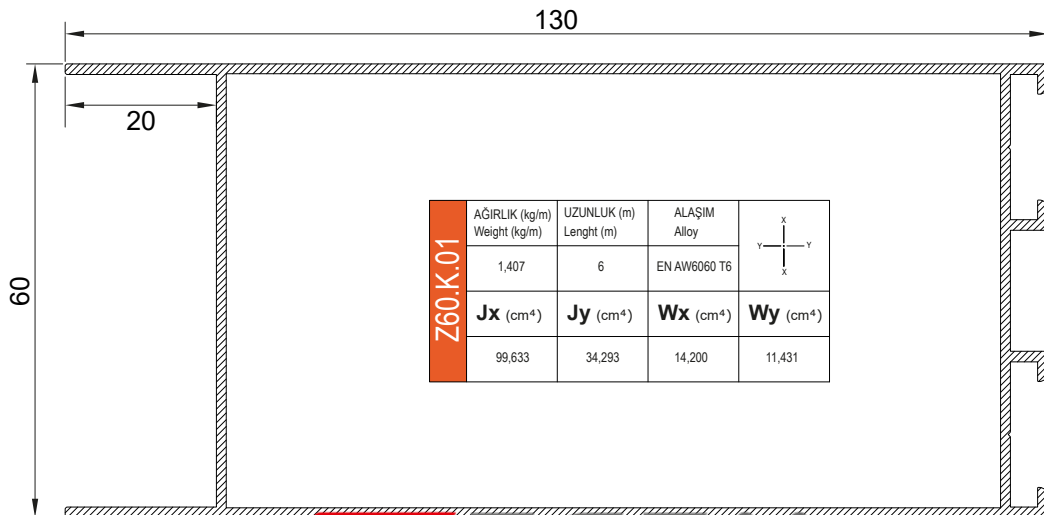


| Z60.K.01 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |                       |
|----------|---------------------------------|---------------------------|-----------------------|-----------------------|
|          | 1,407                           | 6                         | EN AW6060 T6          |                       |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> ) |
|          | 99,633                          | 34,293                    | 14,200                | 11,431                |


| Z60.A.01 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |  |
|----------|---------------------------------|---------------------------|-----------------------|-----------------------------------------------------------------------------------|
|          | 0,400                           | 6                         | EN AW6060 T6          |                                                                                   |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> )                                                             |
|          | 6,270                           | 0,763                     | 1,821                 | 0,408                                                                             |

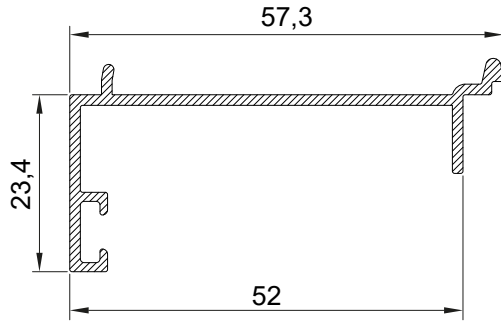


| Z60.A.02 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |  |
|----------|---------------------------------|---------------------------|-----------------------|-------------------------------------------------------------------------------------|
|          | 0,187                           | 6                         | EN AW6060 T6          |                                                                                     |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> )                                                               |
|          | 0,398                           | 0,205                     | 0,291                 | 0,164                                                                               |

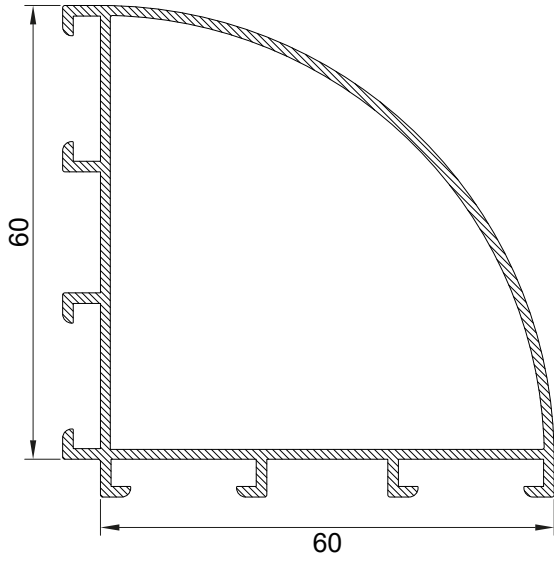

| Z60.A.03 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |  |
|----------|---------------------------------|---------------------------|-----------------------|--------------------------------------------------------------------------------------|
|          | 0,961                           | 6                         | EN AW6060 T6          |                                                                                      |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> )                                                                |
|          | 17,808                          | 17,808                    | 4,749                 | 4,749                                                                                |


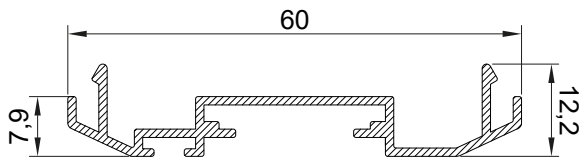


| Z60.A.04 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |  |
|----------|---------------------------------|---------------------------|-----------------------|---------------------------------------------------------------------------------------|
|          | 0,354                           | 6                         | EN AW6060 T6          |                                                                                       |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> )                                                                 |
|          | 4,695                           | 0,112                     | 1,524                 | 0,150                                                                                 |


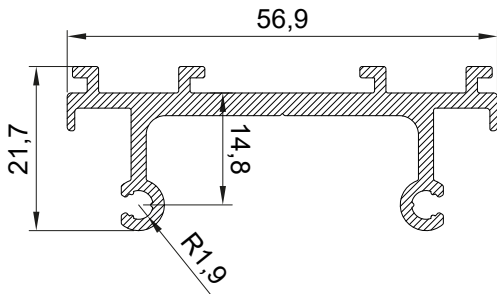


| Z60.C.01 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m) | ALAŞIM<br>Alloy       |  |
|----------|---------------------------------|---------------------------|-----------------------|---------------------------------------------------------------------------------------|
|          | 0,730                           | 6                         | EN AW6060 T6          |                                                                                       |
|          | Jx (cm <sup>4</sup> )           | Jy (cm <sup>4</sup> )     | Wx (cm <sup>4</sup> ) | Wy (cm <sup>4</sup> )                                                                 |
|          | 8,074                           | 0,787                     | 2,838                 | 0,547                                                                                 |



| Z60.G.01 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|-----------------------------------------------------------------------------------|
|          | 0,244                           | 6                            | EN AW6060 T6                 |                                                                                   |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                      |
|          | 0,285                           | 0,532                        | 0,257                        | 0,428                                                                             |

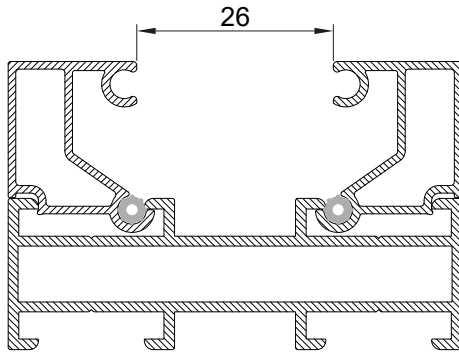



| Z60.G.02 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|-------------------------------------------------------------------------------------|
|          | 0,262                           | 6                            | EN AW6060 T6                 |                                                                                     |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                        |
|          | 0,496                           | 0,603                        | 0,351                        | 0,456                                                                               |

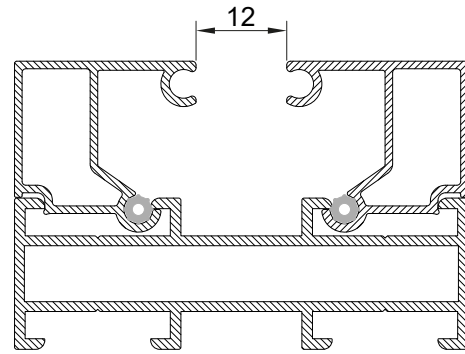


| Z60.G.03 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|-------------------------------------------------------------------------------------|
|          | 0,239                           | 6                            | EN AW6060 T6                 |                                                                                     |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                        |
|          | 0,369                           | 0,460                        | 0,349                        | 0,352                                                                               |

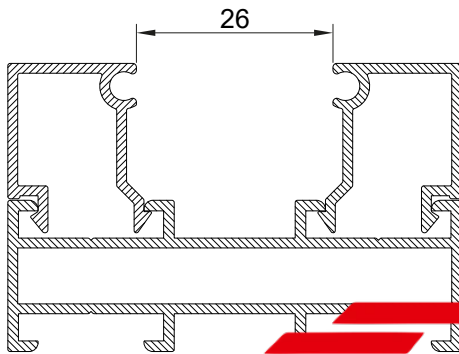


| Z60.G.04 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |  |
|----------|---------------------------------|------------------------------|------------------------------|---------------------------------------------------------------------------------------|
|          | 0,277                           | 6                            | EN AW6060 T6                 |                                                                                       |
|          | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> )                                                          |
|          | 0,591                           | 0,535                        | 0,434                        | 0,378                                                                                 |

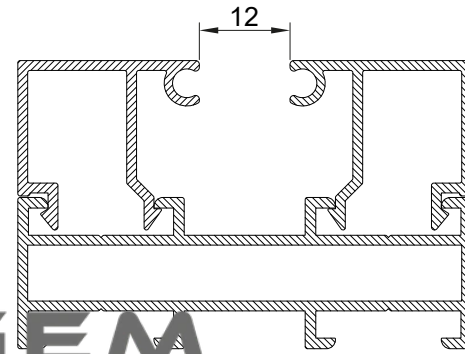

**EGEM**  
ALÜMİNYUM

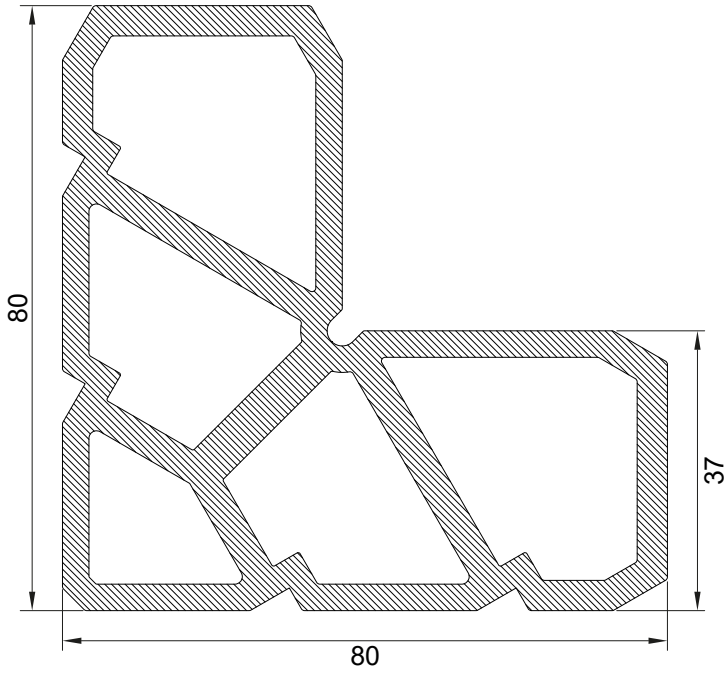

| Z77.LP.05 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |                              |
|-----------|---------------------------------|------------------------------|------------------------------|------------------------------|
|           | 4,397                           | 6                            | EN AW6060 T6                 |                              |
|           | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> ) |
|           | 91,569                          | 91,569                       | 19,036                       | 19,036                       |

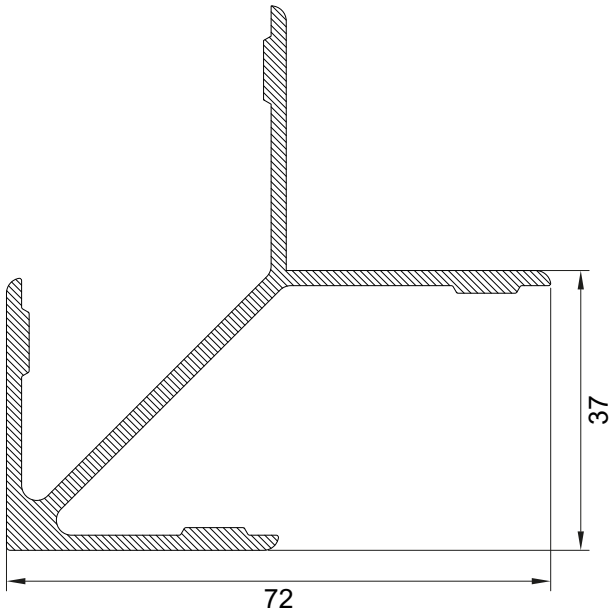

| Z77.LP.06 | AĞIRLIK (kg/m)<br>Weight (kg/m) | UZUNLUK (m)<br>Length (m)    | ALAŞIM<br>Alloy              |                              |
|-----------|---------------------------------|------------------------------|------------------------------|------------------------------|
|           | 1,194                           | 6                            | EN AW6060 T6                 |                              |
|           | <b>Jx</b> (cm <sup>4</sup> )    | <b>Jy</b> (cm <sup>4</sup> ) | <b>Wx</b> (cm <sup>4</sup> ) | <b>Wy</b> (cm <sup>4</sup> ) |
|           | 16,160                          | 16,160                       | 3,446                        | 3,446                        |

## FTL.01.01




**İÇ CAM FİTİLİ**  
GLAZING GASKET (INSIDE)

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
81 gr/m

**Paket / Package:**  
185 m / 15 kg

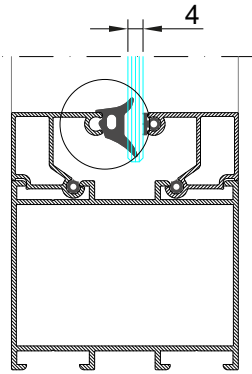

## FTL.01.06




**SIZDIRMAZLIK FİTİLİ**  
SEALING GASKET

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
10 gr/m

**Paket / Package:**  
1500 m / 15 kg



## FTL.01.02




**İÇ CAM FİTİLİ**  
GLAZING GASKET (INSIDE)

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
75 gr/m

**Paket / Package:**  
200 m / 15 kg

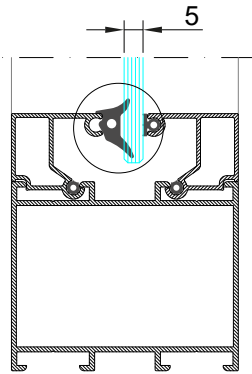

## FTL.01.27




**DİŞ CAM FİTİLİ**  
GLAZING GASKET (OUTSIDE)

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
81 gr/m

**Paket / Package:**  
185 m / 15 kg



## FTL.01.03




**İÇ CAM FİTİLİ**  
GLAZING GASKET (INSIDE)

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
69 gr/m

**Paket / Package:**  
217 m / 15 kg

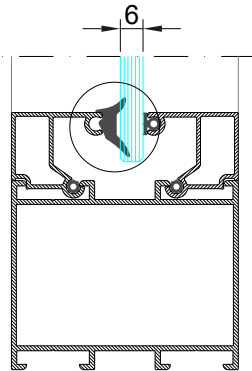

## FTL.01.41




**BİNİ FİTİLİ**  
ACUSTICAL GASKET

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
33 gr/m

**Paket / Package:**  
454 m / 15 kg

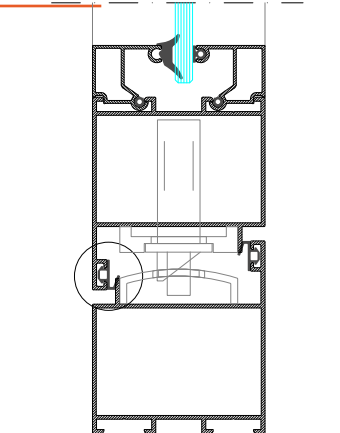

## FTL.01.04




**İÇ CAM FİTİLİ**  
GLAZING GASKET (INSIDE)

**Malzeme / Material :**  
EPDM

**Ağırlık / Weight :**  
55 gr/m

**Paket / Package:**  
272 m / 15 kg

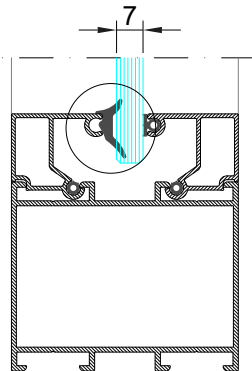

## FTL.01.42




**DİŞ CAM FİTİLİ**  
GLAZING GASKET (OUTSIDE)

**Malzeme / Material :**  
EPDM



**Ağırlık / Weight :**  
18 gr/m

**Paket / Package:**  
833 m / 15 kg





**EGEM**  
**ALÜMİNYUM**

HNG-001

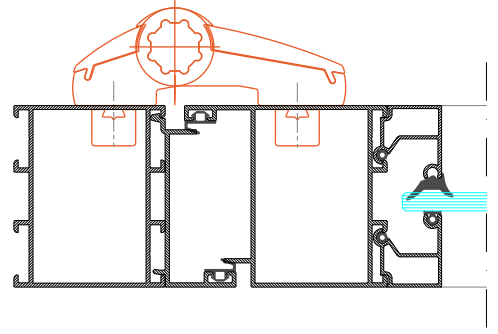**KAPAZLAMA MENTEŞE**  
**DOOR HINGE****Malzeme / Material :**  
**ALÜMİNYUM / ALUMINIUM**


FRC-001

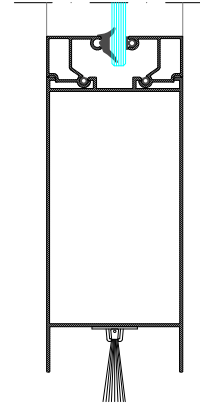**KAPI ALTI FIRÇA**  
**BRUSH FOR DOOR**

KF.0800

**KİL FİTİL**  
**BRUSH PILE SEAL**


KRS-006



KRS-006



KLT-003

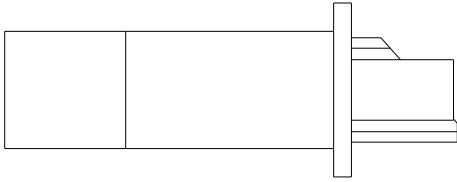

KLT-004

